

CONNECTORS

Operation: DIP10.0mm/90°侧立鱼叉式 USB 连接器



ITEM NO.: USB-100-B263 短体卷边
(L10.0-W14.5-H6.3mm) 2.0-USB-CONNECTORS



Technical parameter

PROJECT	LEVEL	A[better product]	B[average product]
Electrical Properties	Contact Rating	25mA, 24V DC	
	Initial Contact Resistance	30mΩ max.	50mΩ max.
	Insulation Resistance	100MΩ min.500V DC	Skey/PD: 100MΩ min.300V DC
	Withstand Voltage	500V AC for 1 minute	350 V AC for 1 minut
	There No Load	6,000 Cycles	5,000 Cycles
Durable Performance	Rated Load	5,000 Cycles	4,000 Cycles
	Storage temp.	-25℃~+75℃(Operating Temp:)	

表面插装 DIP



正向導入 LATERAL

精密部品 NICETY

可靠 STABILIZE


適合環保 RoHS

Unit:mm

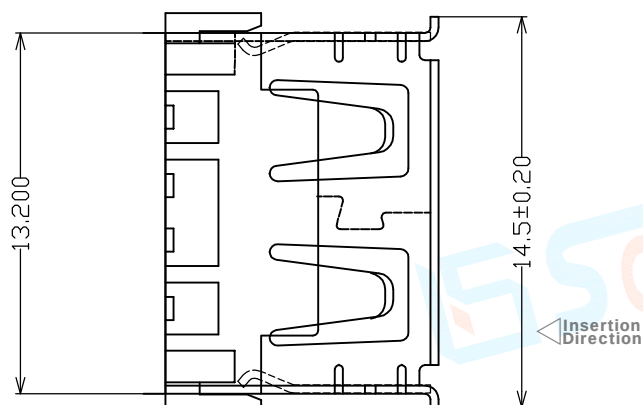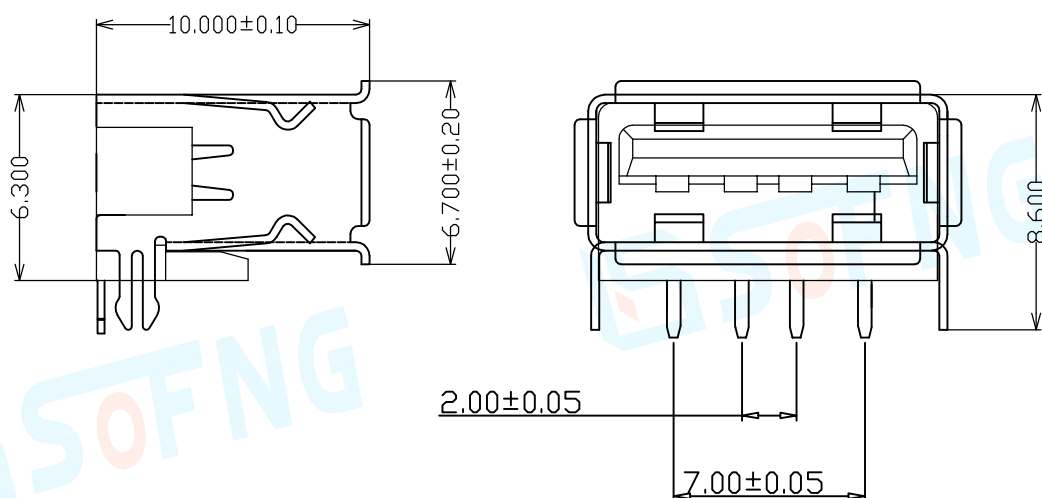

PIN SIGNAL

	VCC	+5V
-	-DATA 0	Neagative Data Channel 0
+	+DATA 0	Positive Data Channel 0
	GND	Ground



Operating Force

Inward

8.0~12.0N. (1N.=100gram-force)


Exiting

8.0~12.0N. (1N.=100gram-force)

Solder-ability (Max.)

IR Reflow: 255°C, 5sec.

Manual: 350°C, 3sec.

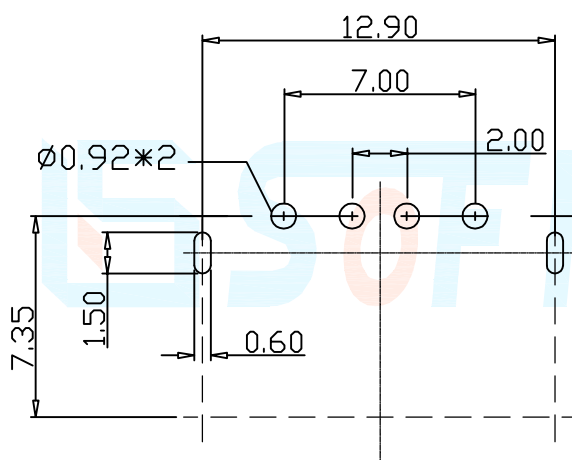

Pin Definition



Material declaration

No.	NAME	Type	Description
① A	胶芯	1	LCP 热塑性塑胶[白色]
② B	接触端子	4	磷铜 C5191 (镀金 1u" / 焊区雾锡)
③ C	外壳	1	黄铜 C2680/SPCC [镀镍 50u" min]



本品不屬於危害性廢棄物,須丟棄時可以委託
回收商予以回收再生處理。

Products do not belong to •

注記 NOTICE

- 1.碩方公司擁有最終解釋權; The company reserves the right of final interpretation;
- 2.文件禁止外洩、轉載; Leaked and reproduced prohibited;
- 3.未經授權修改無效。Modify is invalid.

運送時本產品不要直接與水、酸鹼性化學物質接觸,或放置於含有以上氣體環境中,並且需要注意會有滑落、側翻的危險發生;運輸過程中不能有碰撞或者擠壓,須保證溫度與濕度適中[常溫 25°C,濕度在 50°C 以內],不可導致材料變形或氧化。