

注: 未经许可禁止传输、复制、编辑该文档, 以及利用其内容进行交流

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	8A	8A	/
Rated Voltage	150V	50V	/

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

NOTES2:






- 1.Housing: PA (UL94V-0)
- 2.Long Solder Pin: Brass (Sn Plated)
- 3.Short Solder Pin: Brass (Sn Plated)
- 4.Patch: PA (UL94V-0)

NOTES3:

- 1.Pitch: 3.5mm Poles: 2x(02-24)P
- 2.Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- 3.RoHS Compliance

How to order

MX15EDGRHC	- 3.5	- 2xXXP	- XXXX	- X	- X
产品型号	间距	极数	颜色: 01:常规颜色 02-99:定制颜色	Cu:铜 Fe:铁	A-Z其他定制
			灰色:GY 橙色:OE 蓝色:BU 红色:RD 黑色:BK 透明色:TT 绿色:GN 黄色:YW 白色:WE		

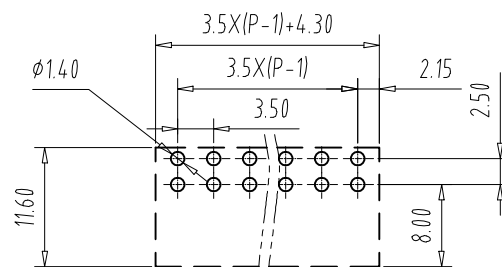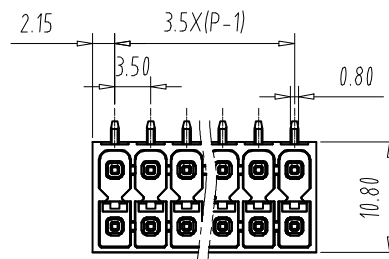

PCB Layout

Pitch Range In mm			Nominal Dimension Range In mm					—	∩	□
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10		
								<		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°		

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	CKK	DATE	23.06.20	UNITS	MM	SHEET/OF	1/1	A
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE						
	CIXI MAIXU ELECTRONICS CO.,LTD.			NAME	MX15EDGRHC-3.5-2xXXP			
	慈溪市迈旭电子有限公司			DWGNO.				