

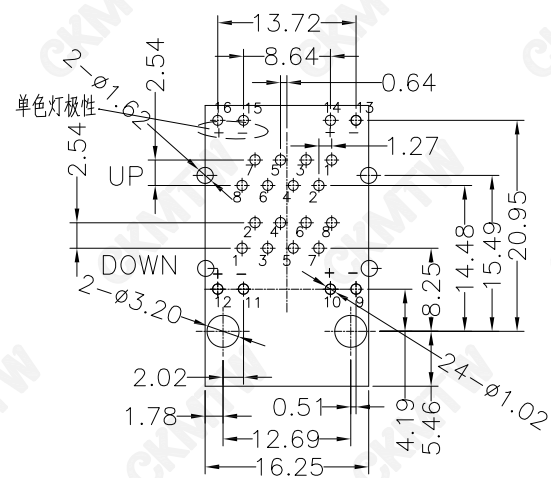
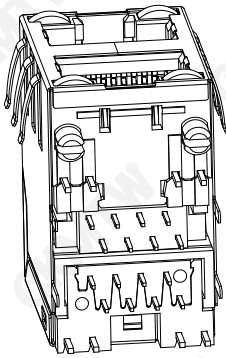


NOTES:

- MATERIAL:
- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER(UL94V-0).
 - 2.CONTACT MATERIAL :PHOSPHOR BRONZE T=0.35mm
 - 3.PLATING :GOLD PLATING OVER NICKEL.
 - 4.SHIELD: COPPER ALLOY 0.20mm THICKNESS PLATING NI.
 - 5.LED: OPTION.
- ELECTRICAL:
- 1.VOLTAGE RATING :125 VAC RMS.
 - 2.CURRENT RATING :1.5 AMP.
 - 3.CONTACT RESISTANCE :50 MILLIOHMS MAX.
 - 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
 - 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.
 - 6.LED RATINGS:FORWARD VOLTAGE:2.2 VOLTS TYPICAL. REVERSE VOLTAGE:5 VOLTS MAXIMUM.
- MECHANICAL:
- 1.DURRABILITY :750 CYCLES MIN.
 - 2.PCB RETENTION PRE-SOLDER :1 LB MIN.
- ENVIRONMENTAL:
- 1.STORAGE : -40°C TO +85°C.
 2. OPERATION : -25°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.



PC Board Layout

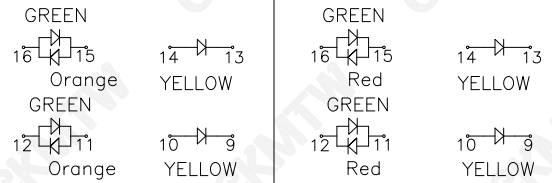

左绿右黄

左绿右黄

双色灯输入对应发光颜色

TOLERANCE TABLE

| | |
|------|-------|
| .0 | ±0.20 |
| .00 | ±0.10 |
| .000 | ±0.05 |

| | | | | | |
|---------------|---------------------|---|-----------------|--------|------|
| APPROVED: | DATE: | Ckmtw 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO., LTD | | | |
| CHECKED: | DATE: | TITLE: 网口插座 RJ45-8P/8C 5JC-2*1 弯插 带屏蔽 带灯 带弹 | | | |
| DRAWN: YYF | DATE: 2017-04-30 | PROD. P/N | R-RJ45R08P-C202 | | |
| | | UNIT | mm | SCALE | free |
| | | FILE NO. | Ckmtw-RJ45-0190 | REV. A | HY04 |