
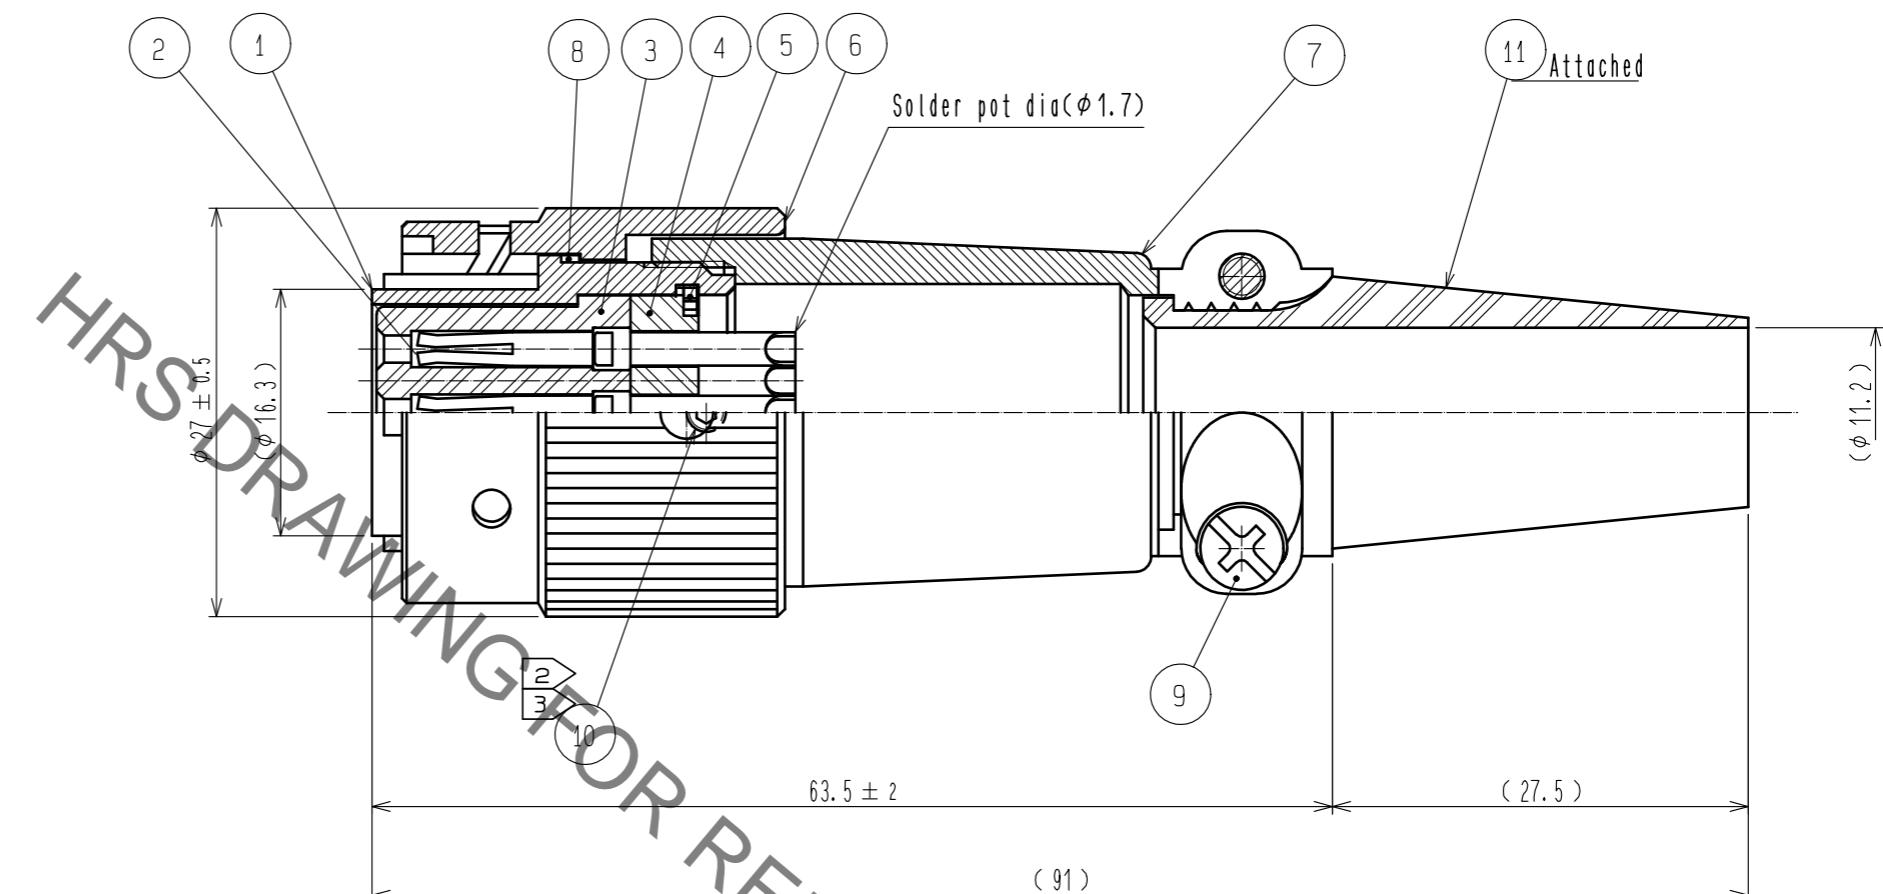


NOTES
 1 Rotation examples of ref No. ① and No. ⑦ are shown.
 2 The recommended clamp torque of ref. No. ⑩ : 0.2 to 0.3 N·m.
 3 Across flats of hexagon hole of ref. No. ⑩ : 1.27

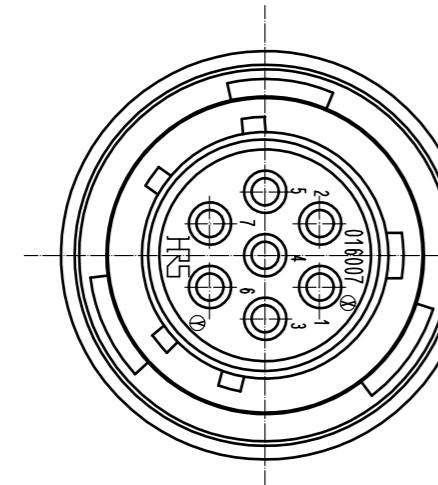

NO.	MATERIAL	FINISH . REMARKS	1 1		CHLOROPRENE RUBBER (BLACK)	
			10	STEEL	NICKEL	JIS B 1177 HEXAGON SOCKET SET SCREW M2.6×0.45×2
5	PHOSPHOR BRONZE	NICKEL PLATING	9	BRASS	NICKEL	JIS B 1111 PAN HEAD MACHINE SCREW M3×0.5×8
4	PHENOL FORMALDEHYDE	(BLACK) UL94V-0	8	POLYACETAL		
3	PHENOL FORMALDEHYDE	(BLACK) UL94V-0	7	ALUMINUM ALLOY	MATTE FINISH NICKEL PLATED	
2	COPPER ALLOY	SILVER PLATING 2 μm min	6	ALUMINUM ALLOY	MATTE FINISH NICKEL PLATED	
1	ALUMINUM ALLOY	NICKEL PLATING				
NO. MATERIAL FINISH . REMARKS			NO.	MATERIAL	FINISH . REMARKS	
UNITS mm	SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS			DESIGNED
			APPROVED : HY. KOBAYASHI	15.09.14	DRAWING NO.	EDC-119154-00-00
			CHECKED : HY. KOBAYASHI	15.09.14	PART NO.	JRC16BP-7SA
			DESIGNED : KN. IKEHARA	15.09.14	CODE NO.	CL114-0303-0-00
			DRAWN : KN. IKEHARA	15.09.14		

HRS
HIROSE
ELECTRIC
CO., LTD.