

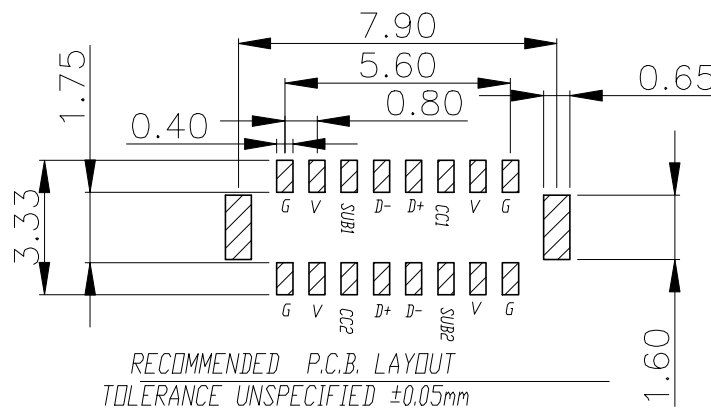


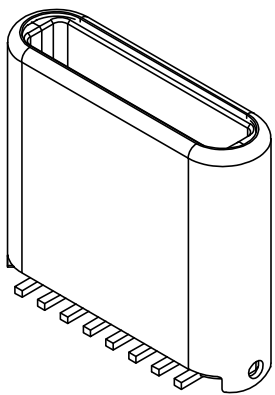

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

- 1.ELECTRICAL:
CURRENT:3A
CONTACT RESISTANCE:40 MILLIOHMS MAX
DIELECTRIC WITHSTANDING VOLTAGE: 200V AC
INSULATION RESISTANCE:100 MEGOHMS MIN
- 2.MECHANICAL:
MATING FORCE:5-20N
WITHDRAWAL FORCE:5-20N
DURBILITY:5000 CYCLES
- 3.ENVIRONMENTAL:
TEMPERTURE RANGE -40℃~105℃
SALT TESTING:24 HOURS

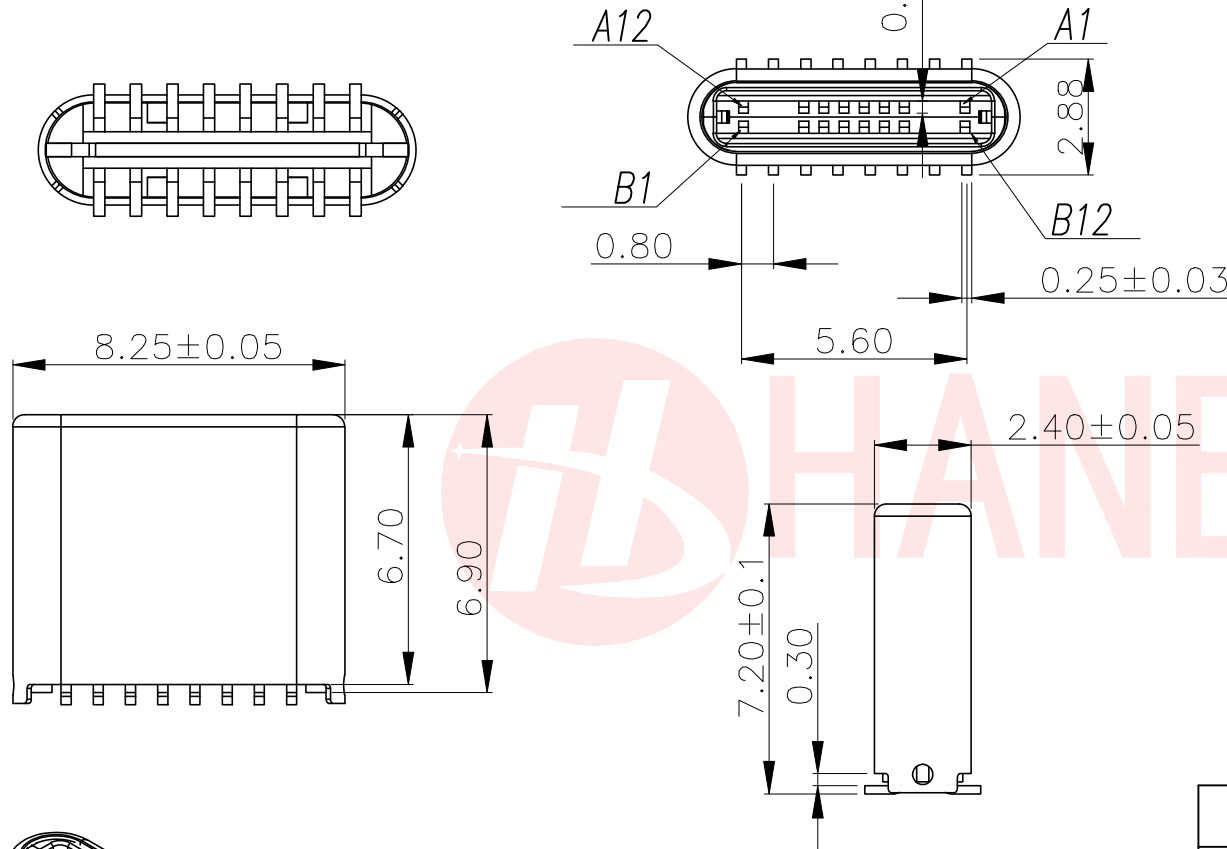

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

4	PLASTIC	HIGH TEMP	BLACK/WHITE	UL 94V-0
3	Latch	STAINLESS STEEL	—	NI Plated
2	TERMINAL	COPPER ALLOY	—	Gold Plated
1	SHELL	STAINLESS STEEL	—	Ni Plated
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD		
DECIMALS: ANGLES:		TITLE TYPE C 16P SMT 铆合7.2短款		
X :±0.30 X :±2°		DWN xiong	PART NO. TC-016-H72	
X.X :±0.20 X.X :±1°		CHKD lee	SCALE:1:1	UNIT: mm
X.XX :±0.10		APVD wang	SIZE: A4	SHEET:10F 1
CUSTOMER COPY				