
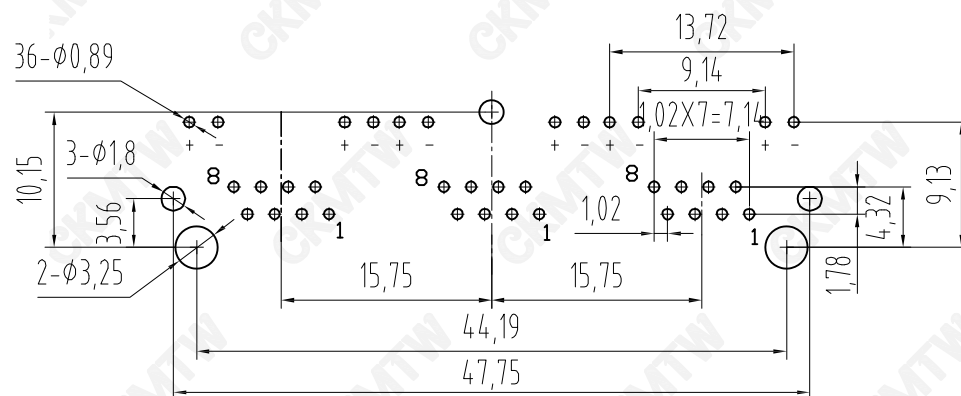
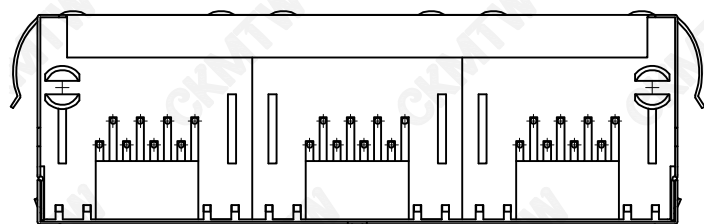


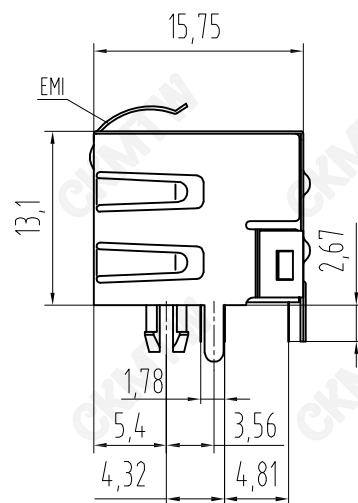


PC Board Layout
Component Side Shown

TOLERANCE TABLE	
. 0	± 0.30
. 00	± 0.20
. 000	± 0.05

1. STORAGE : -40℃~+85℃
2. OPERATION : -25℃ TO +85℃

:GLASS FILLED POLYESTER UL94V-0.
:PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
:GOLD PLATING OVER NICKEL.
:0.23mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO., LTD						
CHECKED:	DATE:	TITLE: RJ45-8P/8C 5JA-1*3 三胞胎 弯插 带屏蔽 带灯带弹						
DRAWN: LYF	DATE: 2024-06-21	PART. NO.		R-RJ45R08P-C301				
		UNIT	mm	SCALE	free			
		FILE NO.	Ckmtw-RJ45-0369	REV.	A	HY04		