



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATI
© COPYRIGHT copyright _dBYe - ALL RIGHTS RESERVE


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW DRAWING	03APR2019	RS	JO

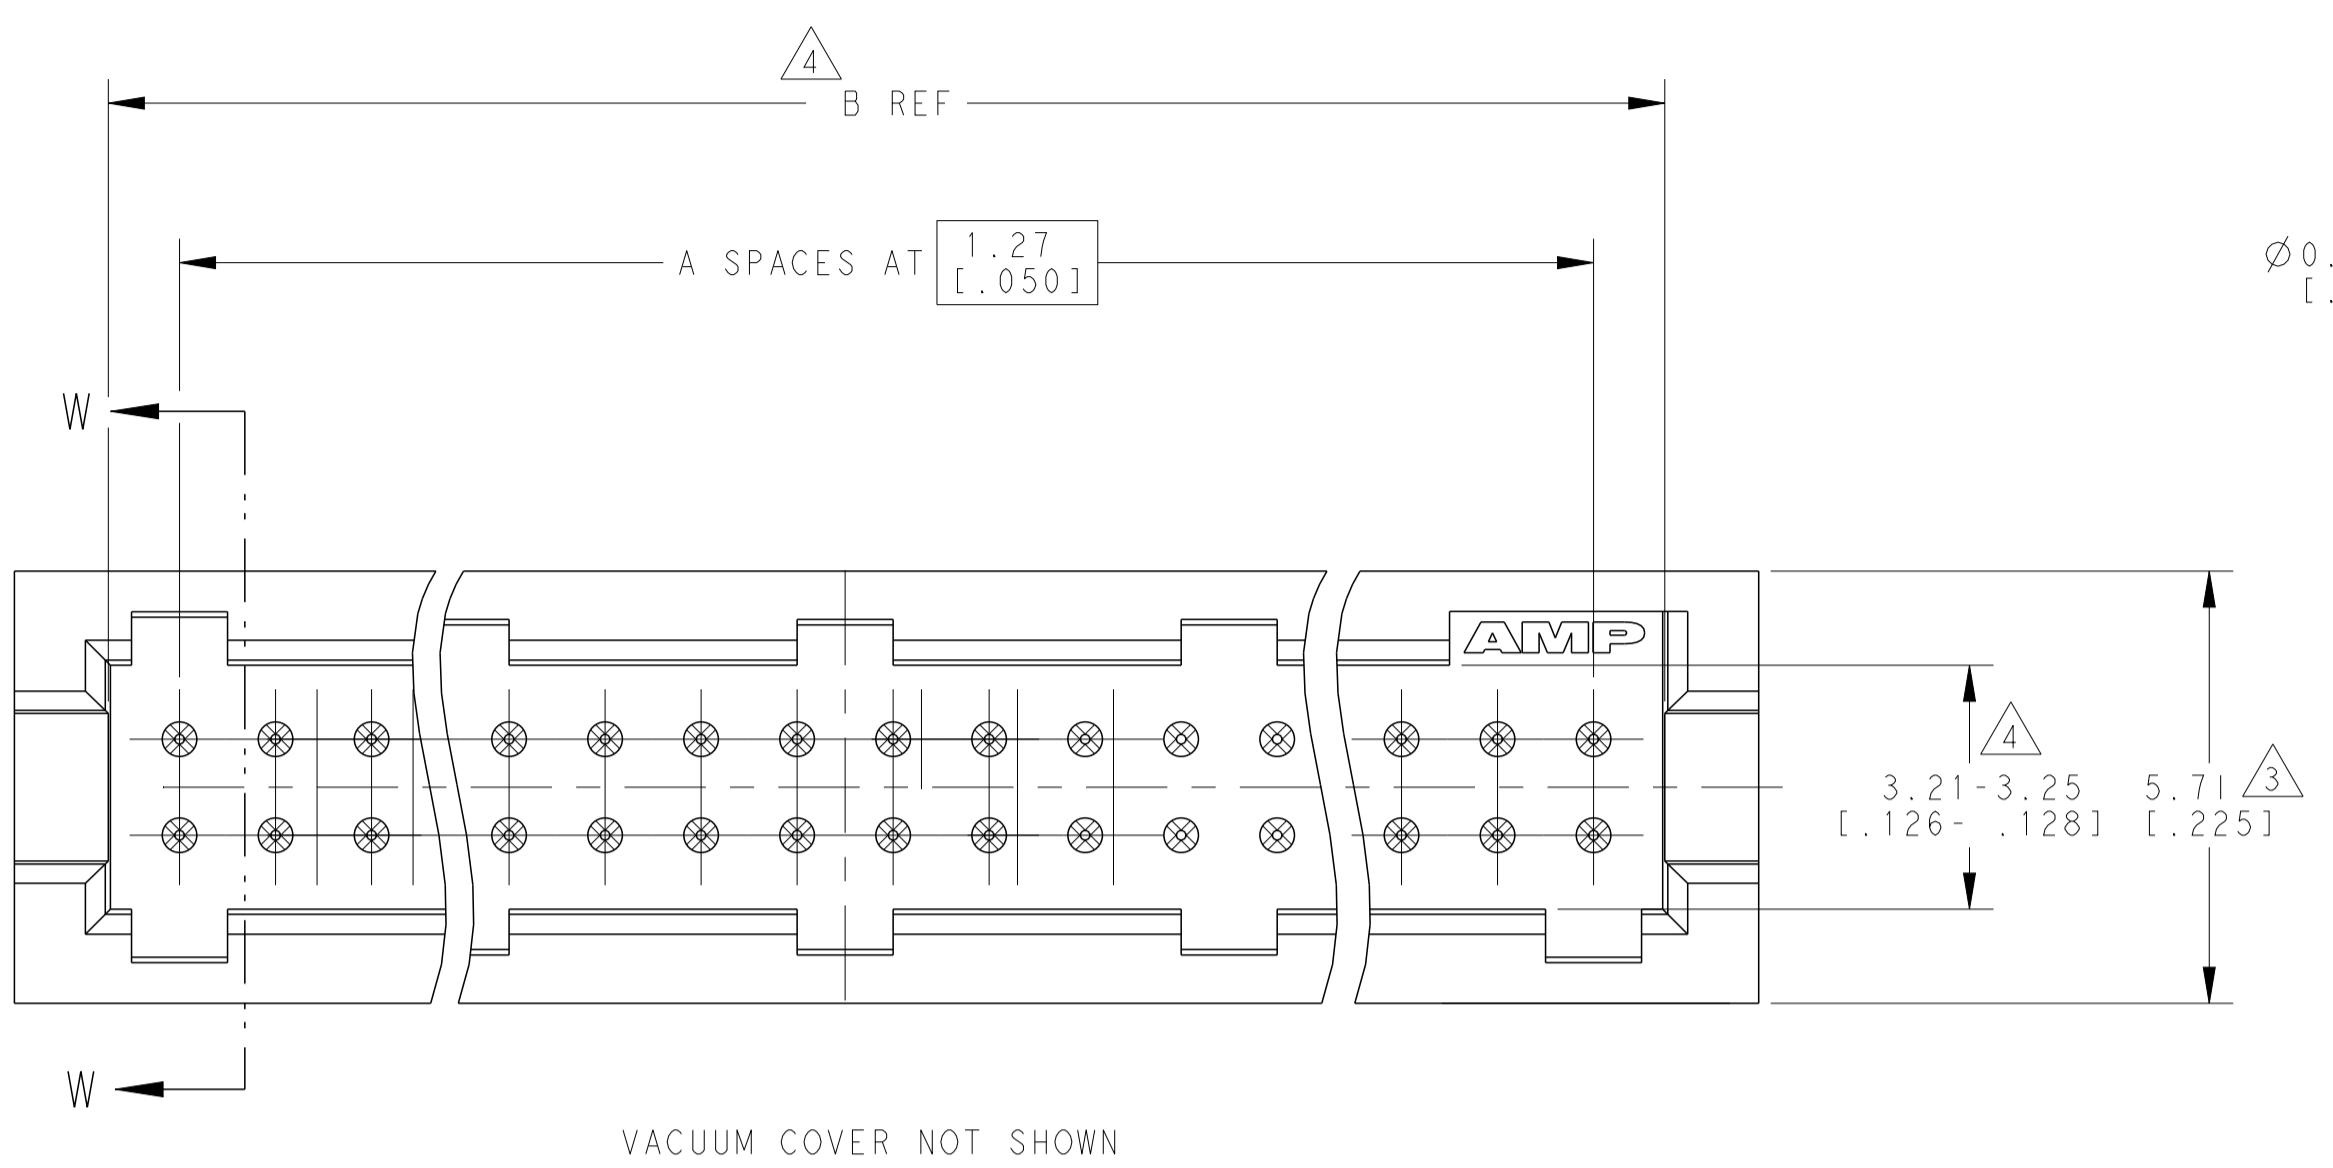


VACUUM COVER NOT SHOWN

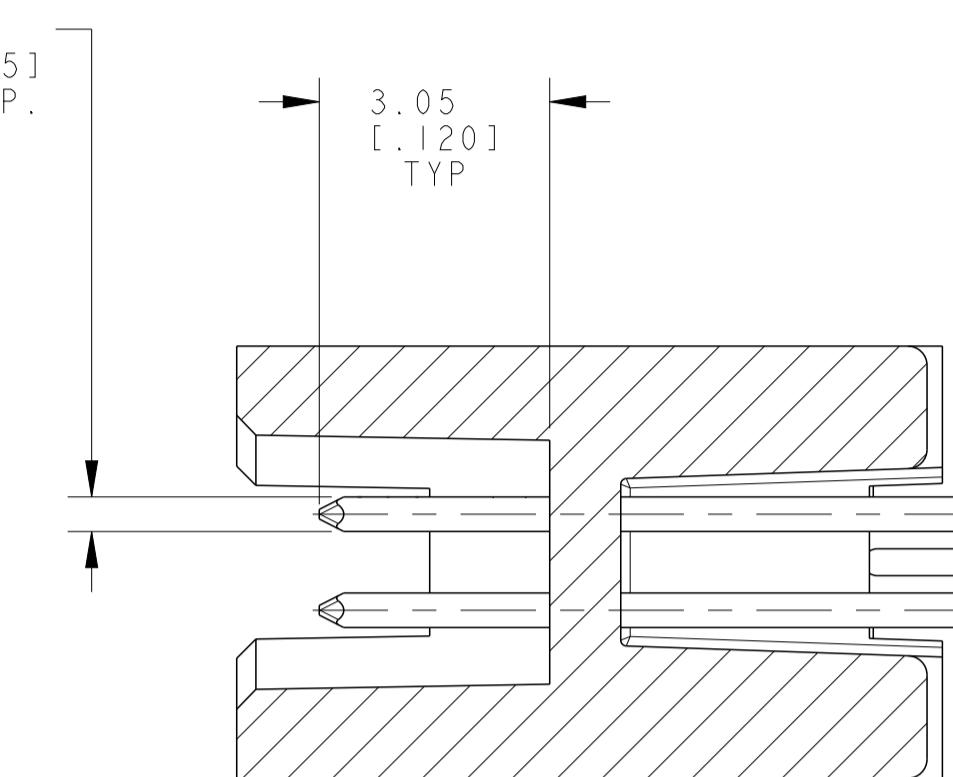

SECTION W - W

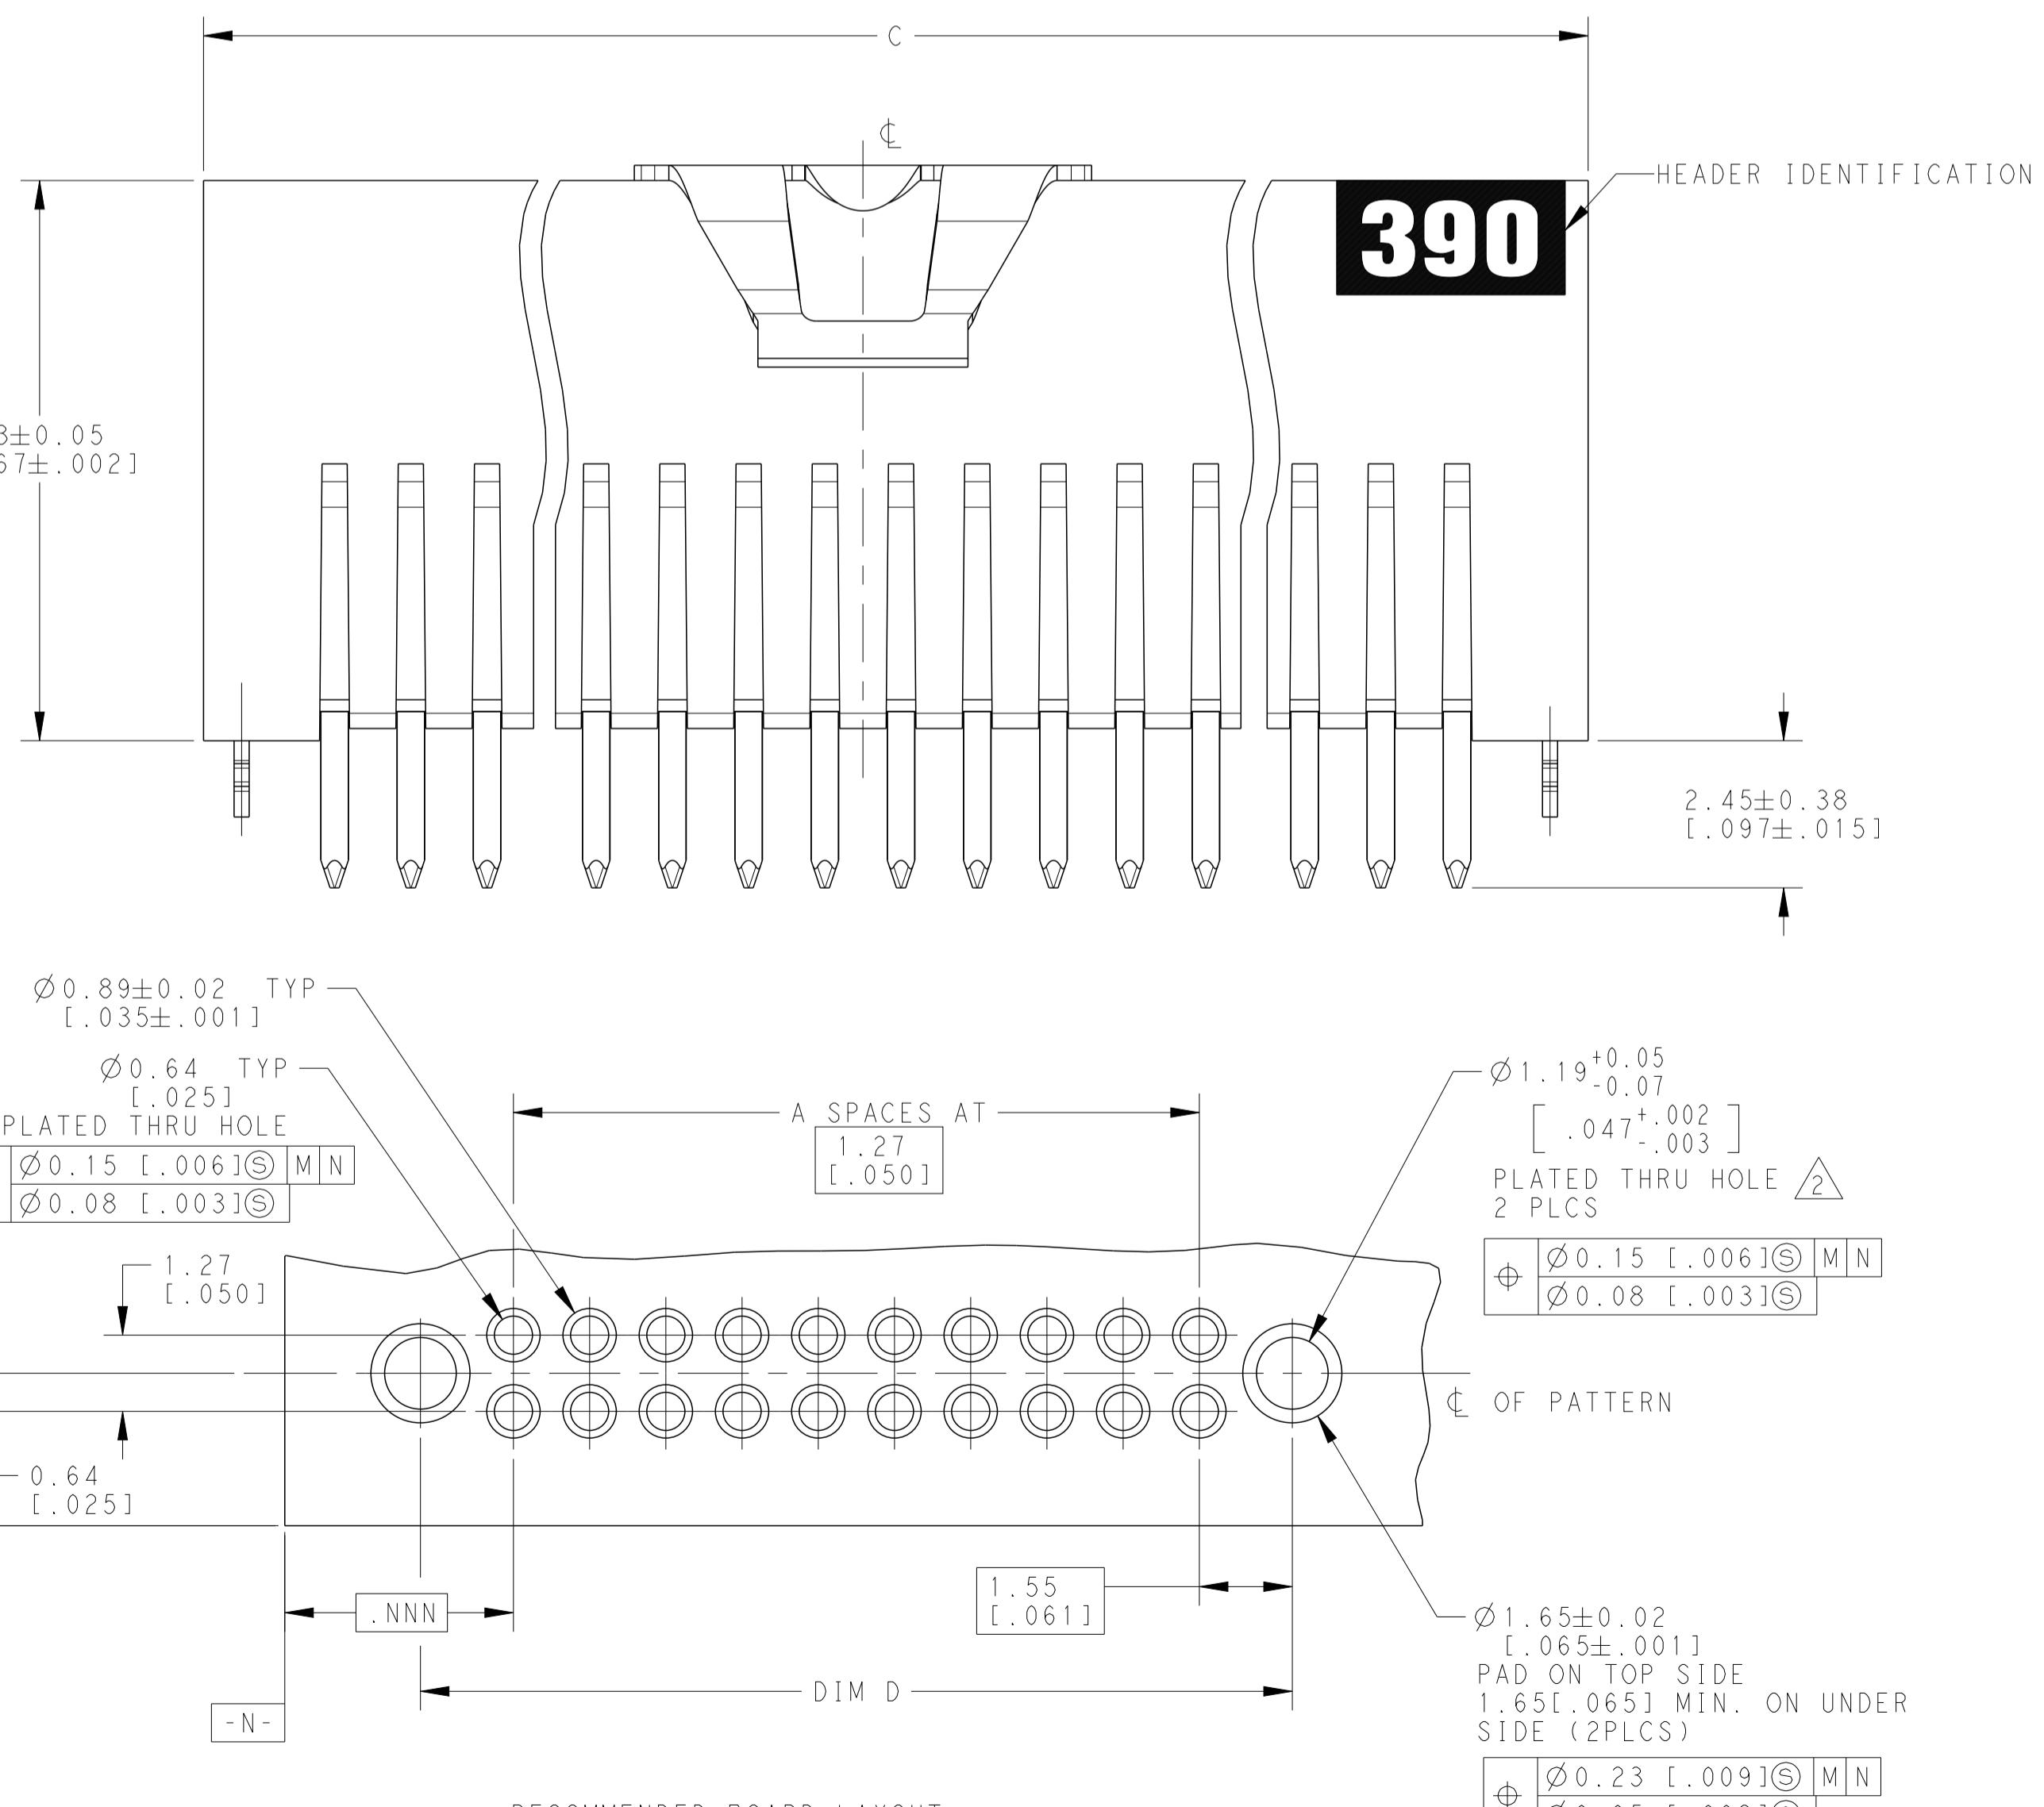

RECOMMENDED BOARD LAYOUT

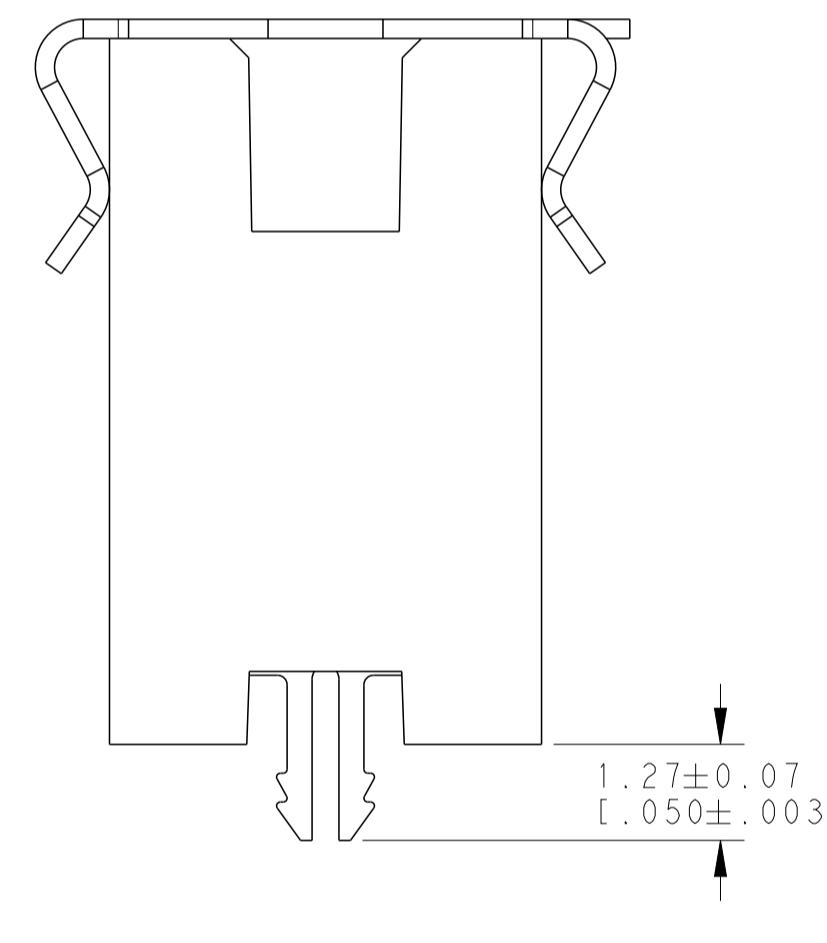

CONTACTS NOT SHOWN

- 1 0.00076[.000030] GOLD AT POINT OF MEASUREMENT, 0.00051[.000020] MIN AT THE END OF AREA G, (LOCALIZED GOLD PLATE AREA), 0.0038[.000150] TIN-LEAD ON LOCALIZED TIN PLATED AREA, ALL OVER 0.0013[.000050] NICKEL
- 2 USE 1.32±0.02[.0520±.0010] DRILLED HOLE (#55 DRILL). FINISH TO BE TIN OVER 0.02[.001]MIN COPPER.
- 3 DIMENSION APPLIES AT BASE OF SHROUD.
- 4 THE NOTED DIMENSIONS APPLY AT THE MATING FACE OF THE HOUSING.
- 5 0.0038 [.000150] TIN LEAD ON HOLD DOWN, ALL OVER 0.0013 [.000050] NICKEL.
- 6. IF PLANNING TO USE MORE THAN ONE MATING PAIR OF CONNECTORS TO INTERCONNECT 2 BOARDS, PLEASE REFER TO THE SPACING PARAGRAPH IN APPLICATION SPEC, #114-7010
- 7. PACKAGED IN TUBES
- 8 DIMENSIONS NOTED APPLY FROM THE BASIC DIMENSION LINE (NOT THE CIRCUIT CAVITY CENTER LINE) TO THE SURFACE INDICATED.
- 9 0.00076[.000030] GOLD AT POINT OF MEASUREMENT, 0.00051[.000020] MIN AT THE END POINTS OF AREA G, (LOCALIZED GOLD PLATE AREA), 0.0038[.000150] TIN ON LOCALIZED TIN PLATED AREA, ALL OVER 0.0013[.000050] NICKEL.
- 10 USE 1.32±0.02(.0520±.0010) DRILLED HOLE (#55 DRILL) FINISH TO BE TIN OVER 0.02(.001) MIN COPPER.
- 11 0.0038 (.000150) TIN ON HOLDDOWN, ALL OVER 0.0013 (.000050) NICKEL
- 12 ROHS 2002/95/EC COMPLIANT
- 13 HOUSING: LCP, COLOR: BLACK
POST: PHOSPHOR BRONZE
VACCUM COVER: ALUMINIUM
HOLD DOWN: COPPER ALLOY

9 11	65.33 [2.572]	66.59 [2.622]	64.05 [2.522]	49	100	12 6-2267256-0
9 11	58.98 [2.322]	60.24 [2.372]	57.70 [2.272]	44	90	12 5-2267256-9
9 11	52.63 [2.072]	53.89 [2.122]	51.35 [2.022]	39	80	12 5-2267256-8
9 11	46.28 [1.822]	47.54 [1.872]	45.00 [1.772]	34	70	12 5-2267256-7
9 11	39.93 [1.822]	41.19 [1.622]	38.65 [1.522]	29	60	12 5-2267256-6
9 11	33.58 [1.322]	34.84 [1.372]	32.30 [1.272]	24	50	12 5-2267256-5
9 11	27.23 [1.072]	28.49 [1.122]	25.95 [1.022]	19	40	12 5-2267256-4
9 11	20.88 [.822]	22.14 [.872]	19.60 [.772]	14	30	12 5-2267256-3
9 11	14.53 [.572]	15.79 [.622]	13.25 [.522]	9	20	12 5-2267256-2
9 11	8.18 [.322]	9.44 [.372]	6.90 [.272]	4	10	12 5-2267256-1
1 5	65.33 [2.572]	66.59 [2.622]	64.05 [2.522]	49	100	1-2267256-0
1 5	58.98 [2.322]	60.24 [2.372]	57.70 [2.272]	44	90	2267256-9
1 5	52.63 [2.072]	53.89 [2.122]	51.35 [2.022]	39	80	2267256-8
1 5	46.28 [1.822]	47.54 [1.872]	45.00 [1.772]	34	70	2267256-7
1 5	39.93 [1.822]	41.19 [1.622]	38.65 [1.522]	29	60	2267256-6
1 5	33.58 [1.322]	34.84 [1.372]	32.30 [1.272]	24	50	2267256-5
1 5	27.23 [1.072]	28.49 [1.122]	25.95 [1.022]	19	40	2267256-4
1 5	20.88 [.822]	22.14 [.872]	19.60 [.772]	14	30	2267256-3
1 5	14.53 [.572]	15.79 [.622]	13.25 [.522]	9	20	2267256-2
1 5	8.18 [.322]	9.44 [.372]	6.90 [.272]	4	10	2267256-1
FINISH	D	C	B	A	NUMBER OF	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAVI.S	03APR2019	 TE TE Connectivity		
DIMENSIONS: mm [INCH]		CHK J. OLSON	03APR2019			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. OLSON	03APR2019			
 0 PLC \pm - 1 PLC \pm - 2 PLC $\pm 0.13[.005]$ 3 PLC \pm - 4 PLC \pm - ANGLES \pm - 		PRODUCT SPEC 108-1332 APPLICATION SPEC 114-7010				
MATERIAL 		FINISH - SEE TABLE	WEIGHT - CUSTOMER DRAWING	NAME HDR ASSY, THROUGH HOLE AMPMODU 50/50 GRID (9.90[.390] MATED HEIGHT)		
			SIZE A 1	CAGE CODE 00779	DRAWING NO C-2267256	RESTRICTED TO
			SCALE 10:1	SHEET 1	OF 1	REV A