


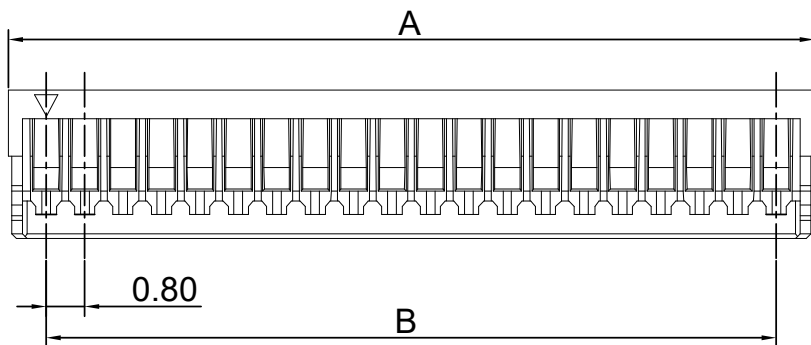


RoHS2.0+REACH



■SPEC.:

- Rated Voltage: 30V AC,DC
- Rated Current: 1.0A AC,DC
- Withstand Voltage: 200V AC/minute
- Contact Resistance: 30mΩ max
- Insulation Resistance: 100MΩ min
- Temperature Range: -25°C~+85°C

■Material:

- Insulator: PA66 UL94V-0

Poles	Dimensions(mm)	
	A	B
02	2.40	0.80
03	3.20	1.60
04	4.00	2.40
05	4.80	3.20
06	5.60	4.00
08	7.20	5.60
10	8.80	7.20
12	10.40	8.80
14	12.00	10.40
16	13.60	12.00
17	14.40	12.80
20	16.80	15.20

5.0				DRAWING: Frank	GENERAL TOLERANCE .X:=±0.30 .X*:=±2° .XX:=±0.25 .XX*:=±1° .XXX:=±0.15 .XXX*:=±0.5°		CHIN-BAN Electronic Technology	
4.0								
3.0				CHECKED: yangjie	UNIT: MM	PROJECTION:	DESCRIPTION: Housing P0.80mm	
2.0					SCALE: 1:1		PART NO: WF080-04P-002	REV: 1.0
1.0				APPROVAL:	SHEET: 1/1		OLD CODE:	SIZE: A4
NO.	DATE	DESCRIPTION	DRAWING				DRAWING NO:	