
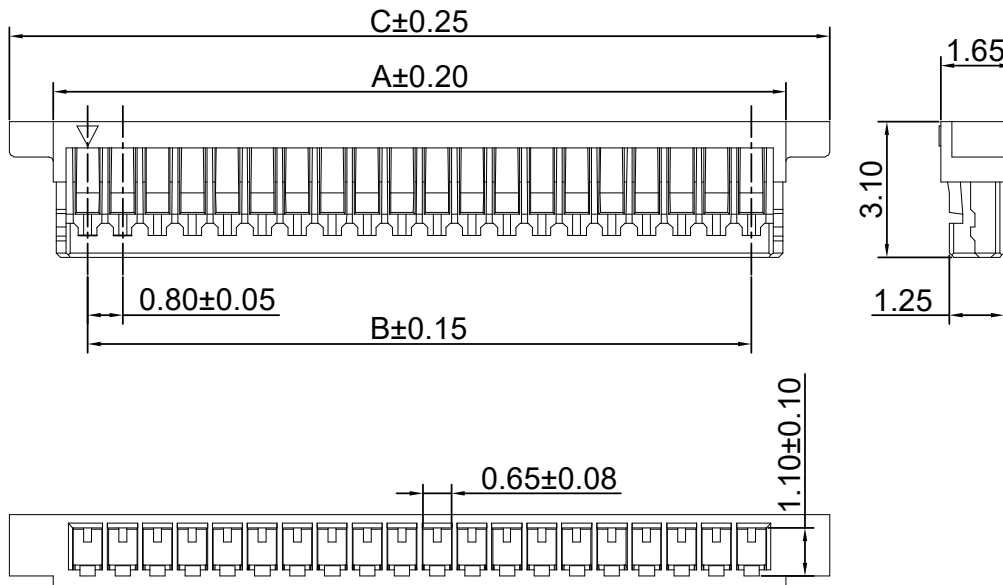


RoHS2.0+REACH



■SPEC.:

- Rated Voltage: 30V AC,DC
- Rated Current: 1.0A AC,DC
- Withstand Voltage: 200V AC/minute
- Contact Resistance: 30m Ω max
- Insulation Resistance: 100M Ω min
- Temperature Range: -25°C~+85°C

■Material:

- Insulator: PA66 UL94V-0

Poles	Dimensions(mm)		
	A	B	C
02	2.40	0.80	4.40
03	3.20	1.60	5.20
04	4.00	2.40	6.00
05	4.80	3.20	6.80
06	5.60	4.00	7.60
08	7.20	5.60	9.20
10	8.80	7.20	10.80
12	10.40	8.80	12.40
14	12.00	10.40	14.00
16	13.60	12.00	15.60
17	14.40	12.80	16.40
20	16.80	15.20	18.80

5.0				DRAWING:	GENERAL TOLERANCE .X:= $\pm$ 0.30 .X*:= $\pm$ 2° .XX:= $\pm$ 0.25 .XX*:= $\pm$ 1° .XXX:= $\pm$ 0.15 .XXX*:= $\pm$ 0.5°		CHIN-BAN Electronic Technology	
4.0								
3.0				CHECKED:	UNIT: MM	PROJECTION:	DESCRIPTION: Housing P0.80mm	
2.0								
1.0				APPROVAL:	SCALE: 1:1		PART NO: WF080-04P-001	REV: 1.0
NO.	DATE	DESCRIPTION	DRAWING		SHEET: 1/1		OLD CODE:	SIZE: A4