


PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	SSRX-
6	SSRX+
7	GND
8	SSTX-
9	SSTX+
Shell	Shield

规格说明: Specifications:
电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
 - 额定电压: Voltage Rating
30V DC
 - 接触电阻: Contact Resistance
30 milliohms MAX
 - 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
 - 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN
- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
 - 端子保持力: Terminal Retention
1.0kgf(MIN)
- 塑胶: Housing:
Hing Temperature Ternmaplastics,
 - 端子: Contact: Copper Alloy C2680
 - 外壳: Shell: Stainless steel 201

- 电镀: Finish:
- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
端子四周镀50U"(MIN)锡,镀金区域镀金1U"
 - 外壳: Shell:
外壳四周镀30-50U"(MIN)锡
Nickel Plating

09XN-4XCC14-X
1:AU 1U"
6:AU 30U"
T:TIN
N:NICKEL
S:Scrolls F:Flat
B:Black W:White BL:Blue

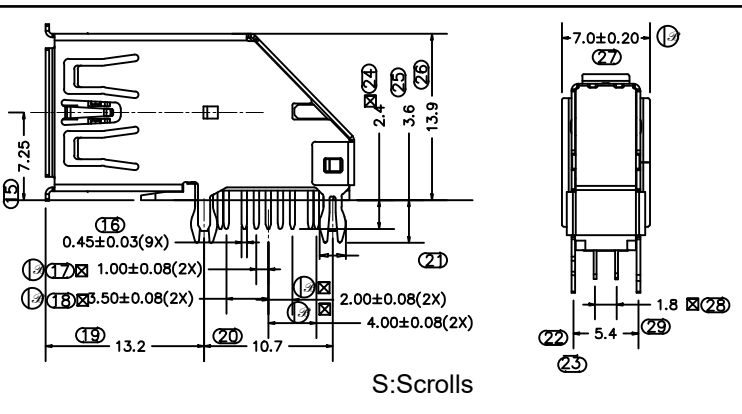

new		2015/5/3	A	瀚源
ECN BO.	DESCRIPTION.	DATE.	REV.	
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER	SCALE: 3:1
Mikey	Tom	Jerry	PART NAME 09XN-4XCC14-X MODEL NAME 09XN-4XCC14-X 3RD ANGLE PROJ	SCALE: 3:1
UNLESS OTHERWISE SPECIFIED, TOLERANCE:				SCALE: 1/2
HanElectricity Co.,LTD				SCALE: 3:1
FILE NO.				SCALE: 3:1