

HSF RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃


Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180℃ for 30-60 seconds
(200℃ for 10 seconds)

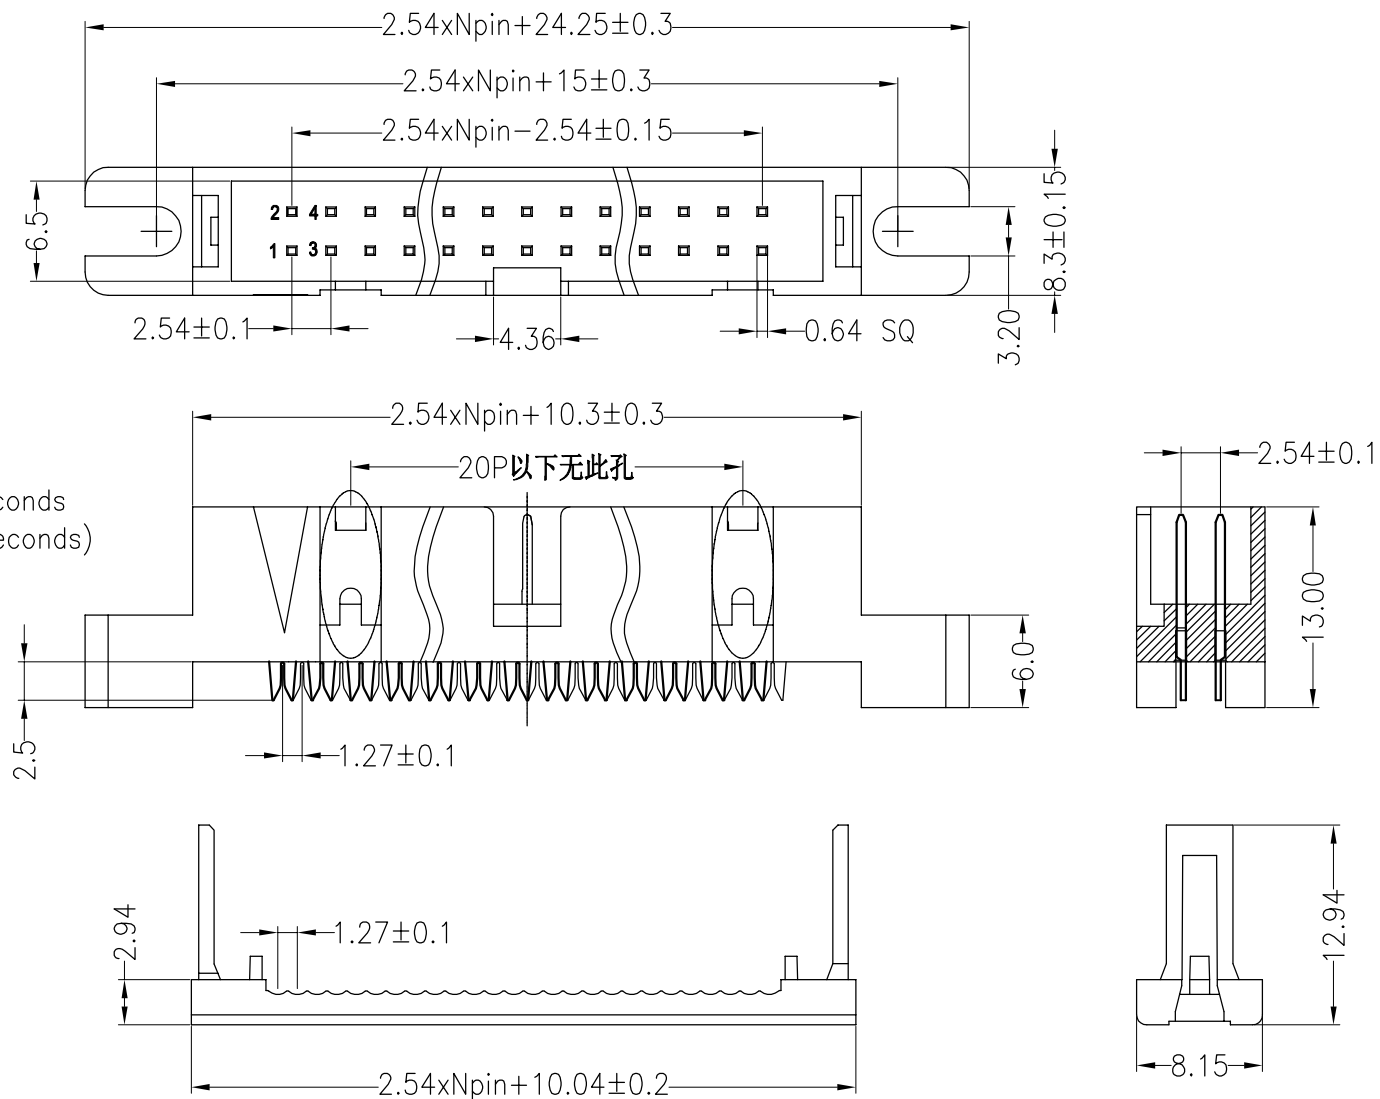

Ordering Information

3910 XX XX W X N 0X

No.of
Pins
Per Row
6--64

Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
S0:Gold Flash/Ni
NN:Ni

Insulator Color
B=Black
G=Grey

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

YiYuSheng

12.03.28

SCALE

FIT

UNIT mm

SIZE A4

SHEET 1/1

PROJ.

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

3910XXXXWXN0X

TITLE:

2.54mm 压排式 筒牛 带定位孔 Npin