

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃


Contact Material:Brass

Contact Plating:Au Over Ni




Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

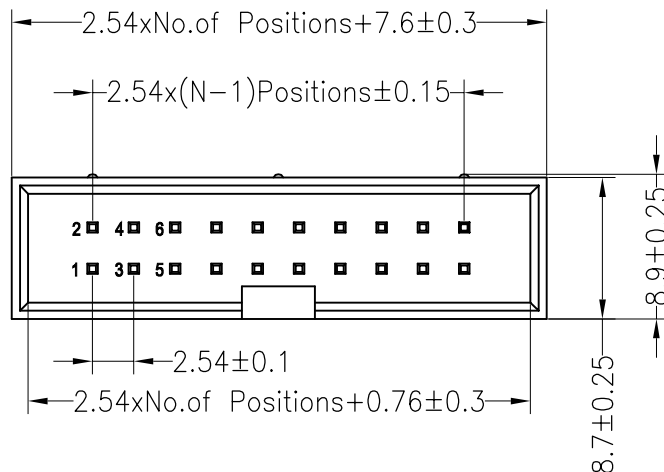

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

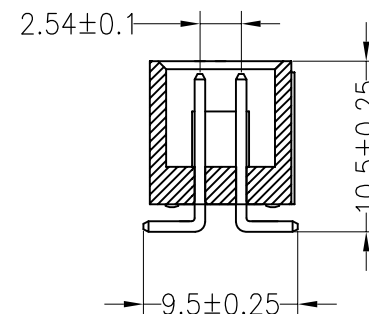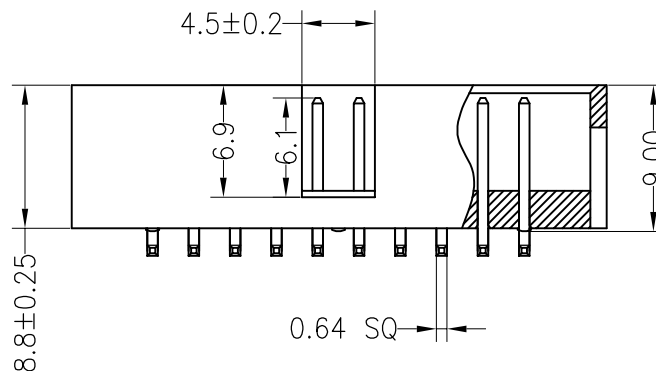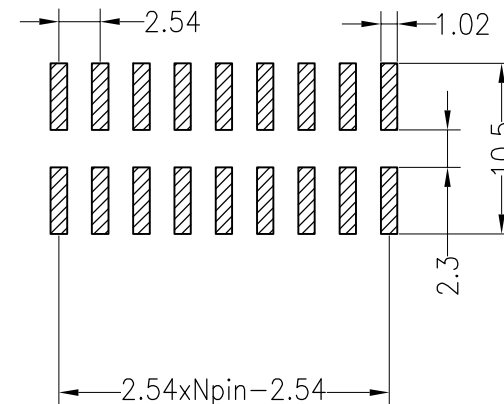

OPERATION

X.X

±0.30

X.XX

±0.20

X.XXX

±0.10

Angle

±3°

DIM

TOL

DRAW

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

深圳市连盛精密连接器有限公司

PART NO.

A0001-BH-00059

TITLE:

2.54Box 26P H8.8mm SMT

A0

2012.03.28

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9