


RoHS




SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au0.6U
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

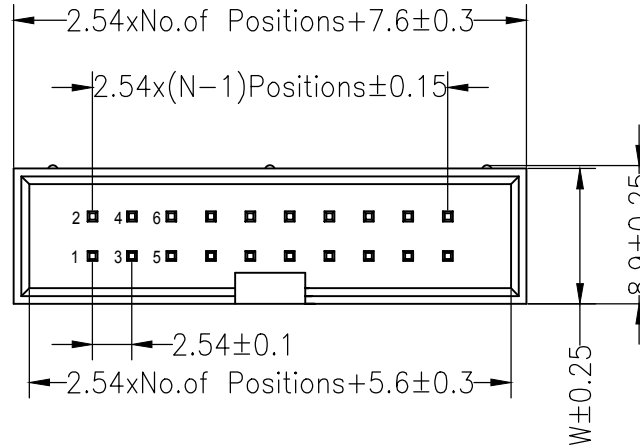

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

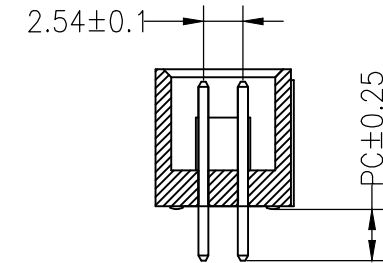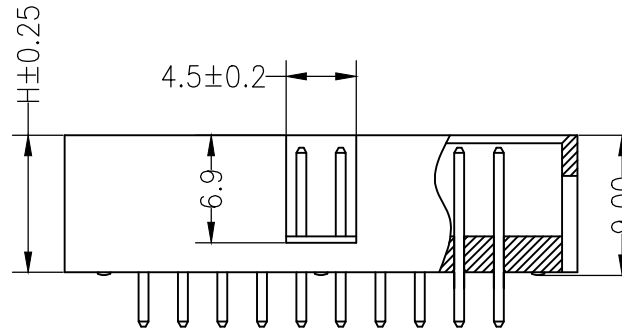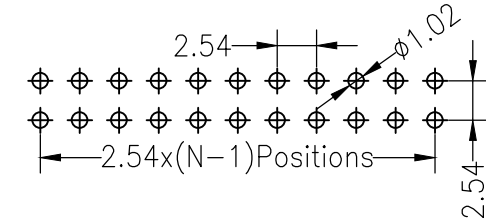

Ordering Information

J	3	016	1	00	5	1	5	0323
产品类型 J=筒牛	间距 3=2.54	总pin数 2~100P	产品形态 1=DIP	电镀厚度 SN=镀锡 00=常规 01=1u" 02=2u" 03=3u"	塑胶材料 5=PA6T	塑胶材料 1=黑色 2=灰色 3=白色 4=蓝色 5=红色 6=黄色 7=灰白色	包装方式 1=管装 2=卷装 3=盘装 4=袋装 5=盒装	序列号

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001		3.3		8.8	8.7
002					

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

◆

深圳市连盛精密连接器有限公司

PART NO.

J30161005150323

TITLE:

2.54BOX 16P H=8.8 DIP PC3.3 L=11.5
AU0.6U PA6T 黑色

1 2 3 4 5 6 7 8 9