

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃


Contact Material:Brass

Contact Plating:Au or Sn Over Ni




Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

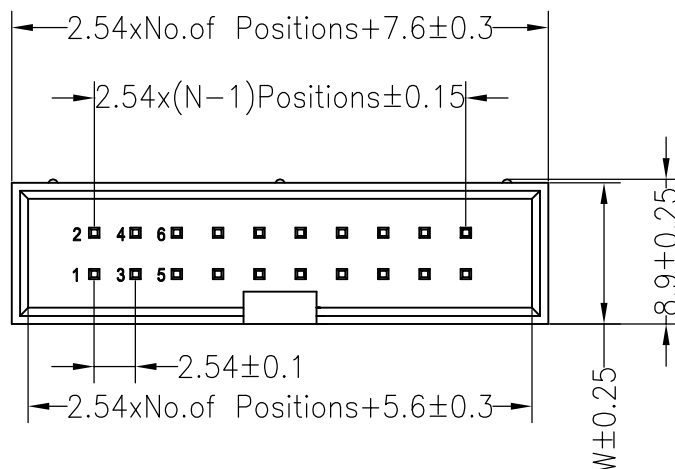

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

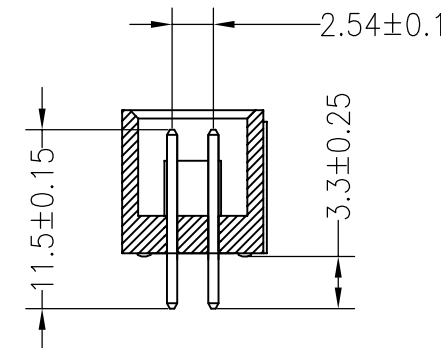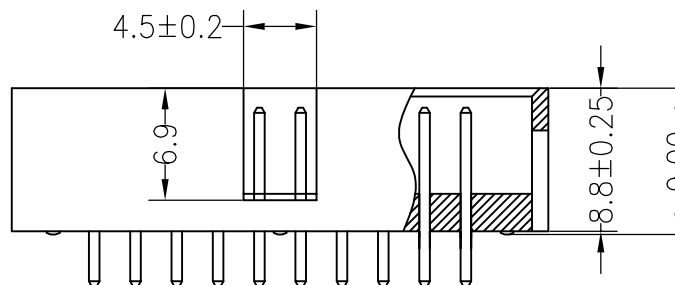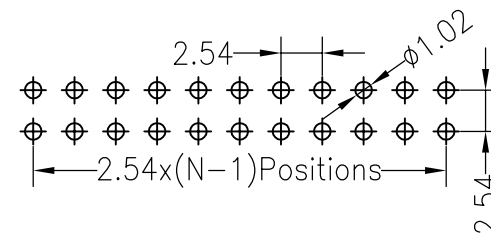

Ordering Information

J	3	010	1	00	5	1	X	0324
产品类型 J=筒牛	间距 3=2.54	总pin数 2-100P	产品形态 1=DIP	电镀厚度 SN=镀锡 00=常规 01=1u" 02=2u" 03=3u"	塑胶材料 5=PA6T	塑胶材料 1=黑色 2=灰色 3=白色 4=蓝色 5=红色 6=黄色 7=灰白色	包装方式 1=管装 2=卷装 3=盒装 4=袋装 5=盒装	序列号

Dimension antitheses list						
ITEM	PB	PC	PW	H	W	L
001		3.3		8.8	8.7	11.5
002						

				OPERATION		DRAW			SCALE	FIT	深圳市连盛精密连接器有限公司	
				X.X	±0.30					UNIT		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	J301010051X0324
A0	2012.03.28	NEW DRAWING		X.XXX	±0.10					SHEET		
				Angle	±3°	APPROVE					TITLE:	2.54BOX 10P H=8.8 DIP PC3.3 L=11.5 AU0.6 PA6T 黑色
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM		TOL			PROJ.		