



REV.	ECN NO OR DESCRIPTION	REVISED	DATE





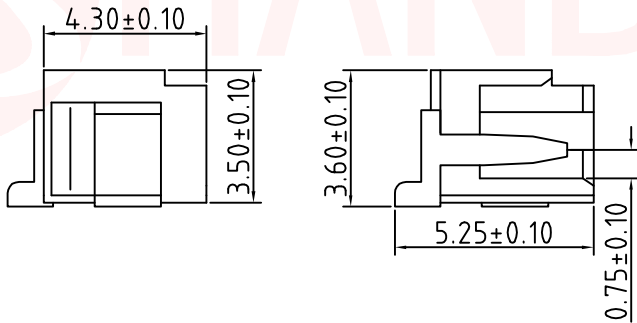


TABLE:

CSG PART NO.	PIN位	A	B	C
WAFER-MX125WT-2A	2PIN	1.25	7.50	
WAFER-MX125WT-3A	3PIN	2.50	8.75	
WAFER-MX125WT-4A	4PIN	3.75	10.00	2.50
WAFER-MX125WT-5A	5PIN	5.00	11.25	3.75
WAFER-MX125WT-6A	6PIN	6.25	12.50	5.00
WAFER-MX125WT-7A	7PIN	7.50	13.75	6.25
WAFER-MX125WT-8A	8PIN	8.75	15.00	7.50
WAFER-MX125WT-9A	9PIN	10.00	16.25	8.75
WAFER-MX125WT-10A	10PIN	11.25	17.50	10.00
WAFER-MX125WT-11A	11PIN	12.50	18.75	11.25
WAFER-MX125WT-12A	12PIN	13.75	20.00	12.50
WAFER-MX125WT-13A	13PIN	15.00	21.25	13.75
WAFER-MX125WT-14A	14PIN	16.25	22.50	15.00
WAFER-MX125WT-15A	15PIN	17.50	23.75	16.25
WAFER-MX125WT-16A	16PIN	18.75	25.00	17.50

技术参数
间距: 1.25
温度范围: -25~+85℃
额定电压: 125V AC, DC
额定电流: 1.0A AC, DC
接触电阻: 20mΩ
绝缘电阻: 100MΩ
耐压: 500V AC/minute

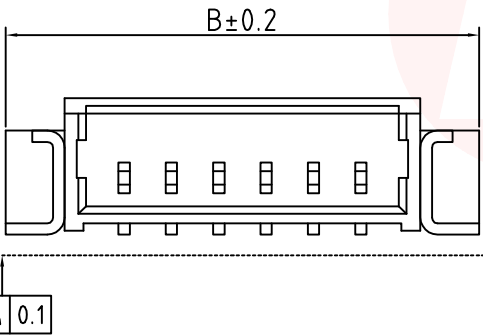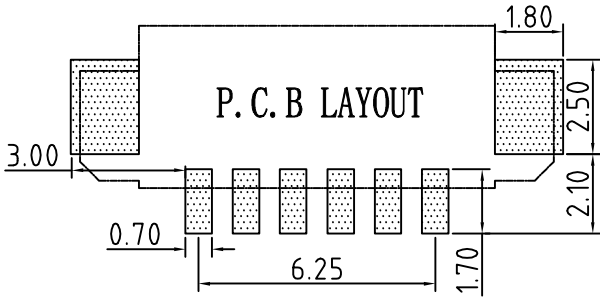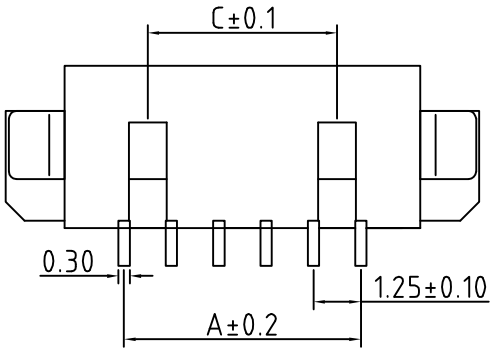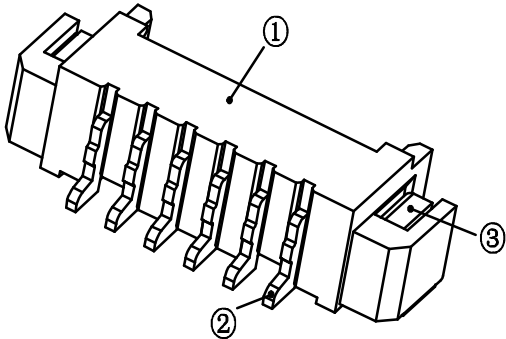

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD				
DECIMALS:		ANGLES:		TITLE WAFER MX 1.25贴片				
X	±0.20	X	±2°	DWN	xiong	PART NO. WAFER-MX125WT-NA		
X.X	±0.10	X.X	±1°	CHKD	lee	SCALE:1:1	UNIT: mm	
X.XX	±0.05			APVD	wang	SIZE: A4	SHEET:10F 1	REV: A4
CUSTOMER COPY								