


ECHELLE 2/1




MATERIAL :

Shell: Aluminium alloy nickel plated

PERFORMANCE CHARACTERISTICS :

Operating temperature: -40°C up to 105°C
Corrosion salt spray: 48 hours

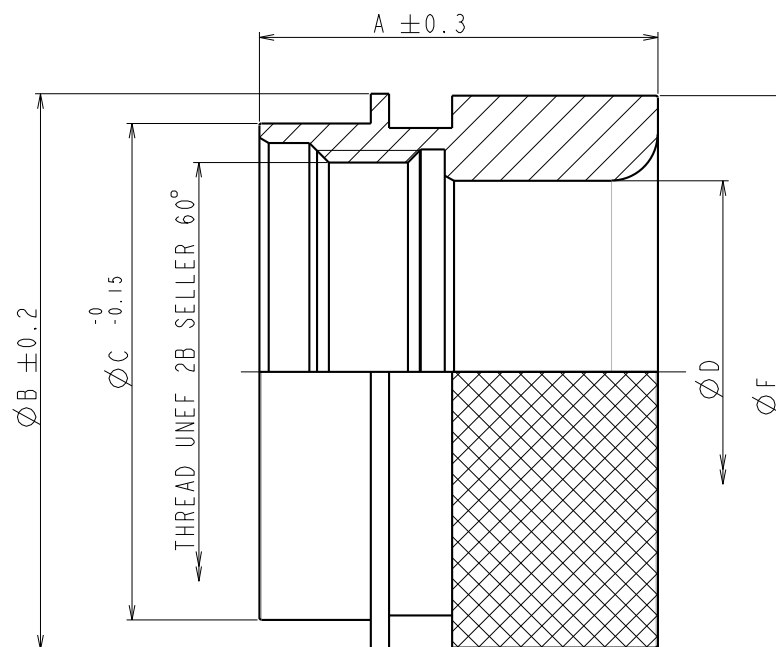

Shell	Reference	Thread UNEF	A	ØB	ØC	ØD	ØF
10	UTO10AD	9/16 24	24.7	21.0	17.0	11.6	18.4
12	UTO12AD	11/16 24	24.7	24.0	21.2	14.5	23.7
14	UTO14AD	13/16 20	24.7	27.0	23.6	17.7	24.5
16	UTO16AD	15/16 20	27.0	30.0	27.3	20.6	29.8
18	UTO18AD	1" 1/16 18	27.0	33.3	30.0	23.1	32.0
20	UTO20AD	1" 3/16 18	27.0	36.5	33.6	26.3	36.1
22	UTO22AD	1" 5/16 18	27.0	39.7	35.85	29.2	38.5
24	UTO24AD	1" 7/16 18	27.0	42.9	40.2	32.4	41.6

B	10/06/04	--	Up dating of the drawing	--
ISS	DATE	Latest modification - by:	C. PROVOST	MOD N°
Designed by:	C. PROVOST	Date:	30/04/03	Type of drawing: CUSTOMER
Checked by:	SEE DISTRIBUTION LIST	Date:	SEE DISTRIBUTION LIST	
TITLE	CONNECTOR UTO-UTOW METAL SHRINK BOOT ADAPTOR			
Scale	General angular	MATERIAL 2017A or 2011 ROHS		
5/1	Tolerances: ± --	compliant lead allowed : 0.4% maxi		
General linear	General machining	General linear	General machining	Geometrical Tolerances
Tolerances : ± --	surface texture	surface texture	surface texture	See NF E 04-552
PROJECT		PROJECT		
MSK I		MSK I		
SOURIAU		SOURIAU		
Route Nationale 23		Route Nationale 23		
72470 CHAMPAGNE		72470 CHAMPAGNE		
Tel. (33)02.43.54.35.00		Tel. (33)02.43.54.35.00		
This document is the property of		This document is the property of		
SOURIAU		SOURIAU		
It must not be reproduced or		It must not be reproduced or		
communicated without permission		communicated without permission		
FORMAT	SOURIAU DRG N°			SHEET
A2	UTOXXAD-C01			1 / 1