


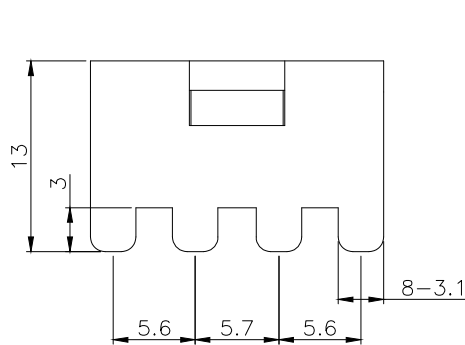


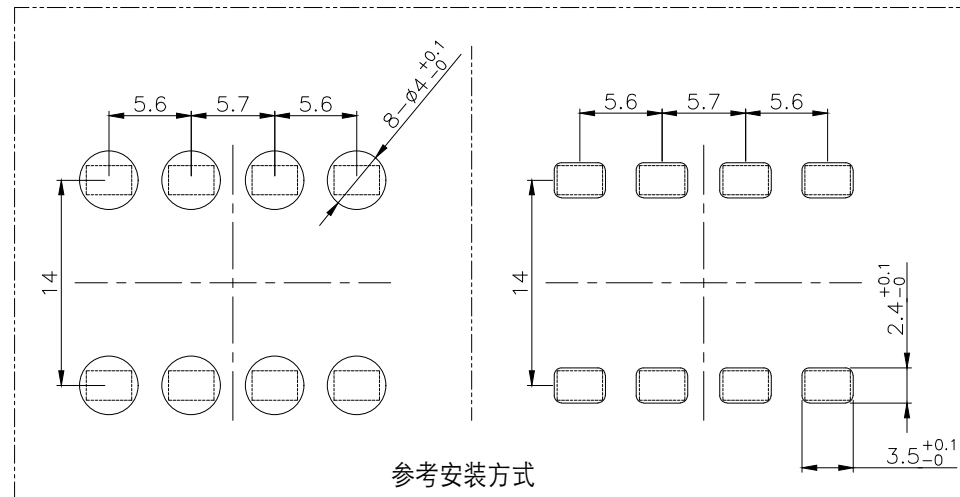


NOTES: 备注

- 1.Copper ,nickel base,matte tin
黄铜, 镍底, 镀雾锡
- 2.Wire screw hole M6
压线螺孔 M6
- 3.Current Rating: 220A
额定电流: 220A
- 4.There shall be no defects such as
pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
- 5.Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

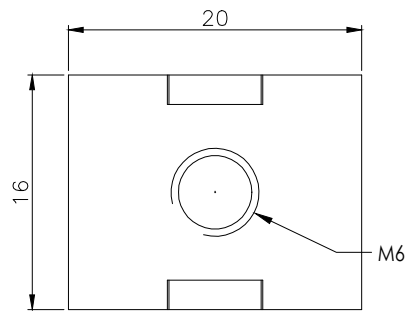

Ordering Information

Type	Screw Thread	Welding Feet	Series	D-ØIP	Product No.	Material
MxP-Flat Teeth (扁平)	3-M6 (螺牙)	(焊脚)	0608-8x8mm	5-ø4T	产品序号	默认-Copper (黄铜)
RH-Rivet Nut (铆螺母)	4-M6 (螺牙)	2-2个	1014-10x14mm	FD-Flag		RC-Red Copper (紫铜)
RG-Rivet Gasket (铆垫片)	5-M6 (螺牙)	4-4个		Dip		
	6-M6 (螺牙)	6-6个				
		8-8个				

			GENERAL TOLERANCE	制 图 DRAWING	01	 深圳讯答科技有限公司 ShenzhenXunDaTechnology Co.,Ltd			
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	PCB 焊接端子 (插板 铆垫片 M6 8焊脚 16x20x13mm)	版本 REV.	A
1	初版发行		X.XX ±0.20	比 例 SCALE		产品料号 PART NO.	XD-RG68-1620-D004RC	单位 UNITS	mm
			X.XXX ±0.10	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°						