



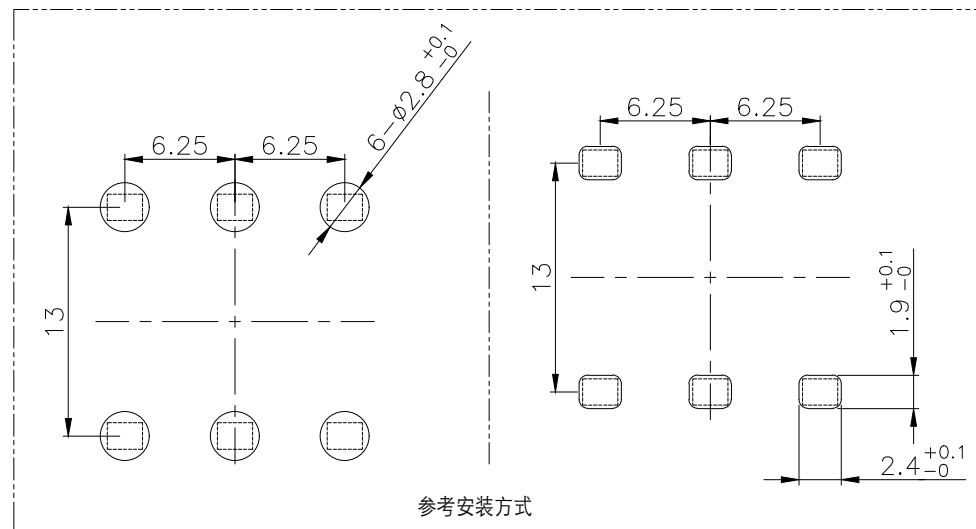

1. Copper ,nickel base,matte tin
黄铜，镍底，镀雾锡
- 2.Wire screw hole M6
压线螺孔M6
- 3.Current Rating: 126A
额定电流:126A
- 4.There shall be no defects such as
pin deformation and burrs.
不得有脚变形，毛刺等缺陷
- 5.Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

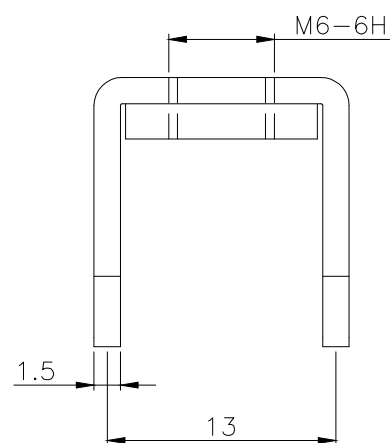

XD - * * * * - ** - D *** ***

├── Type
 Type sawtooth
 KH=Revised Nut
 RQ=Revised Gasket
 RQ=Revised Gasket
 (鋼片)

├── Screw Thread
 3-M3 (螺牙)
 4-M4 (螺牙)
 5-M5 (螺牙)
 6-M6 (螺牙)
 (螺牙)

├── Welding Feet
 2-in
 4-in
 6-in
 8-in
 (吋)

├── Series
 0000-040mm
 0001-101.4mm

├── D
 D=GP
 D=SD
 D=RD
 D=RD
 Dip

├── Product No.
 產品號碼

├── Material
 Material is C-Popper
 RQ=Revised Co.
 (黃銅)
 (鋼板)

			GENERAL TOLERANCE	制图 DRAWING	01	 深圳讯答科技有限公司 ShenzhenXunDaTechnology Co.,Ltd			
			DIM TOL	审核 CHECK					
			X.X ±0.30	批准 APPROVAL		产品名称 TITLE	PCB 焊接端子 (插板 铆垫片 M6 6焊脚 14.5x14.5x15.3mm)	版本 REV.	A
1	初版发行		X.XX ±0.20	比例 SCALE		产品料号 PART NO.	XD-RG66-1414-D003RC	单位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X.XXX ±0.10	投影 Projection		材料 MATERIAL		页次 SHEET	1/1
			Angle ±3.0°						

 深圳讯答科技有限公司
ShenzhenXunDaTechnology Co.,Ltd

产品名称 TITLE	PCB 焊端子 (插板 铆垫片 M6 6焊脚 14.5x14.5x15.3mm)	版本 REV.	A
产品料号 PART NO.	XD-RG66-1414-D003RC	单位 UNITS	mm
材料 MATERIAL		页次 SHEET	1/1