

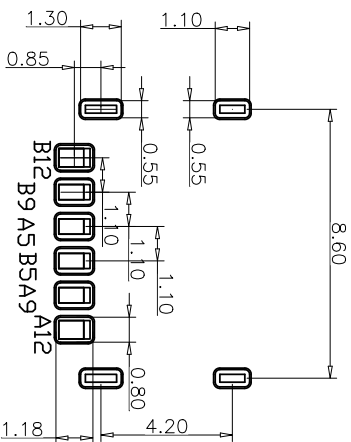


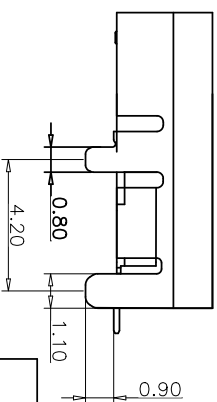

TOLERANCE FOR PCB LAYOUT IS ± 0.05



USB TYPE C PIN ASSIGNMENTS			
PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

备注 (NOTE):

1材质:

- 1.1胶芯: LCP UL94 V-0
- 1.2端子: C2680, T=0.2mm; 镍底, 镀金
- 1.3外壳: 不锈钢201-H 表面镀镍

2. 电气特性:

- 2.1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.
- 2.2. 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.
- 2.3. 额定电压: 5V.
- 2.4. 耐电压: 100VAC.
- 2.5. 绝缘电阻: 至少100兆欧.

3. 机械性能:

- 3.1. 插入力: 0.5-2.0Kg
- 3.2. 拔出力: 0.6-2.04Kg
- 3.3. 插拔次数: 5000次.
4. 工作环境: -20℃ to +85℃.

产品图				深圳市精拓金电子有限公司					
PRODUCT CHART DWG				Shenzhen Jing Tuo Jin Electronics Co., Ltd.					
公差一览表									
TOLERANCE UNLESS OTHERWISE									
X.	±0.35	X.	±5.°	单位	MM	制图	L-S-S	产品料号	918-418K2028S40004
X.	±0.25	X.	±2.°	比例	1:1	审核	G-Z-F	产品名称	TYPE-C6F板上无弹9.45
XX	±0.20	XX	±1.°	SCALE		CHD		PRODUCT NO.	
XXX	±0.05	XXX	±0.5°	日期	2021-03-10	核准	黄国荣	APD	版本
				DATE				NEW	A0
									VER