


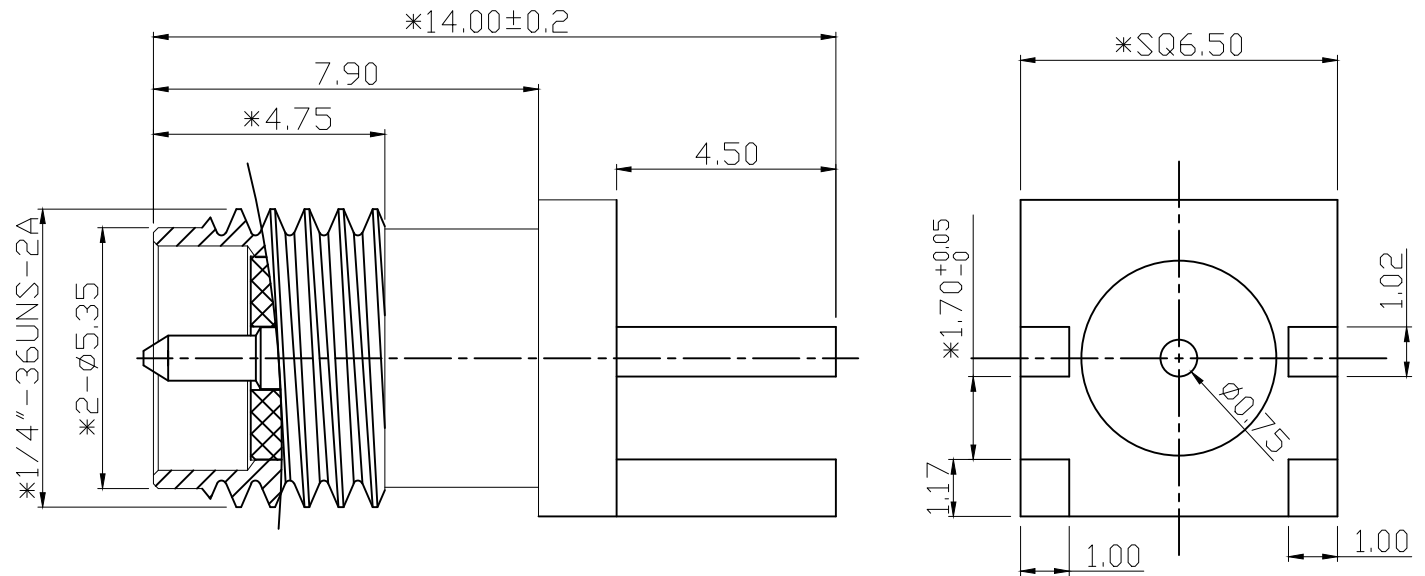


1. Electrical Characteristics

- 1.1 Impedance: 50 Ohm
- 1.2 Working Frequency: DC - 6 GHz
- 1.3 S.W.R.: ≤ 1.5
- 1.4 Working Voltage: 335V / max
- 1.5 Insulation Resistance: 1000 Mohm
- 1.6 Contact Resistance: Center Contact: 5 mohm
- 1.7 Outer Contact: ≤ 2.5 mohm

2. Environmental

- 2.1 Working Temperature Range: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 2.2 Salt spray test: 48H

 Tolerance 未標注公差: .X ±0.2 .XX ±0.10 .XXX ±0.05 未標注角度公差: ±1°	HJ-Tech 东莞市皇捷通讯科技有限公司 DONGGUAN HUANGJIE COMMUNICATION TECHNOLOGY CO., LTD.			
	客戶編號		Part Name. 品名/規格	SMA JCAK S/T FOR PCB
	材質		C/U Part No. 客戶料號	
	處理		PartNo. 料號	2LC15SM010
	比例	1:1	Draw . 繪圖	Check 校對 App 核准
	版本 次	A 0	据芬	
	單位	mm	2020.12.17	

3	PIN针 OD1.45*14.20	黄铜 镀金2u''	SMA145142G-5118	1					
2	绝缘体 OD4.18*7.00	PTFE 白色	SMA418070I-3436	1					
1	螺牙本体SQ6.50*14.00	C3604 镀金1u''	SMA065140G-5111	1					
部件 序号	部件品名/规格	材料	零件编号	用量	版號 Rev. No.	日期 Date.	變更單號 ECN No.	變更者	Description. 内容