


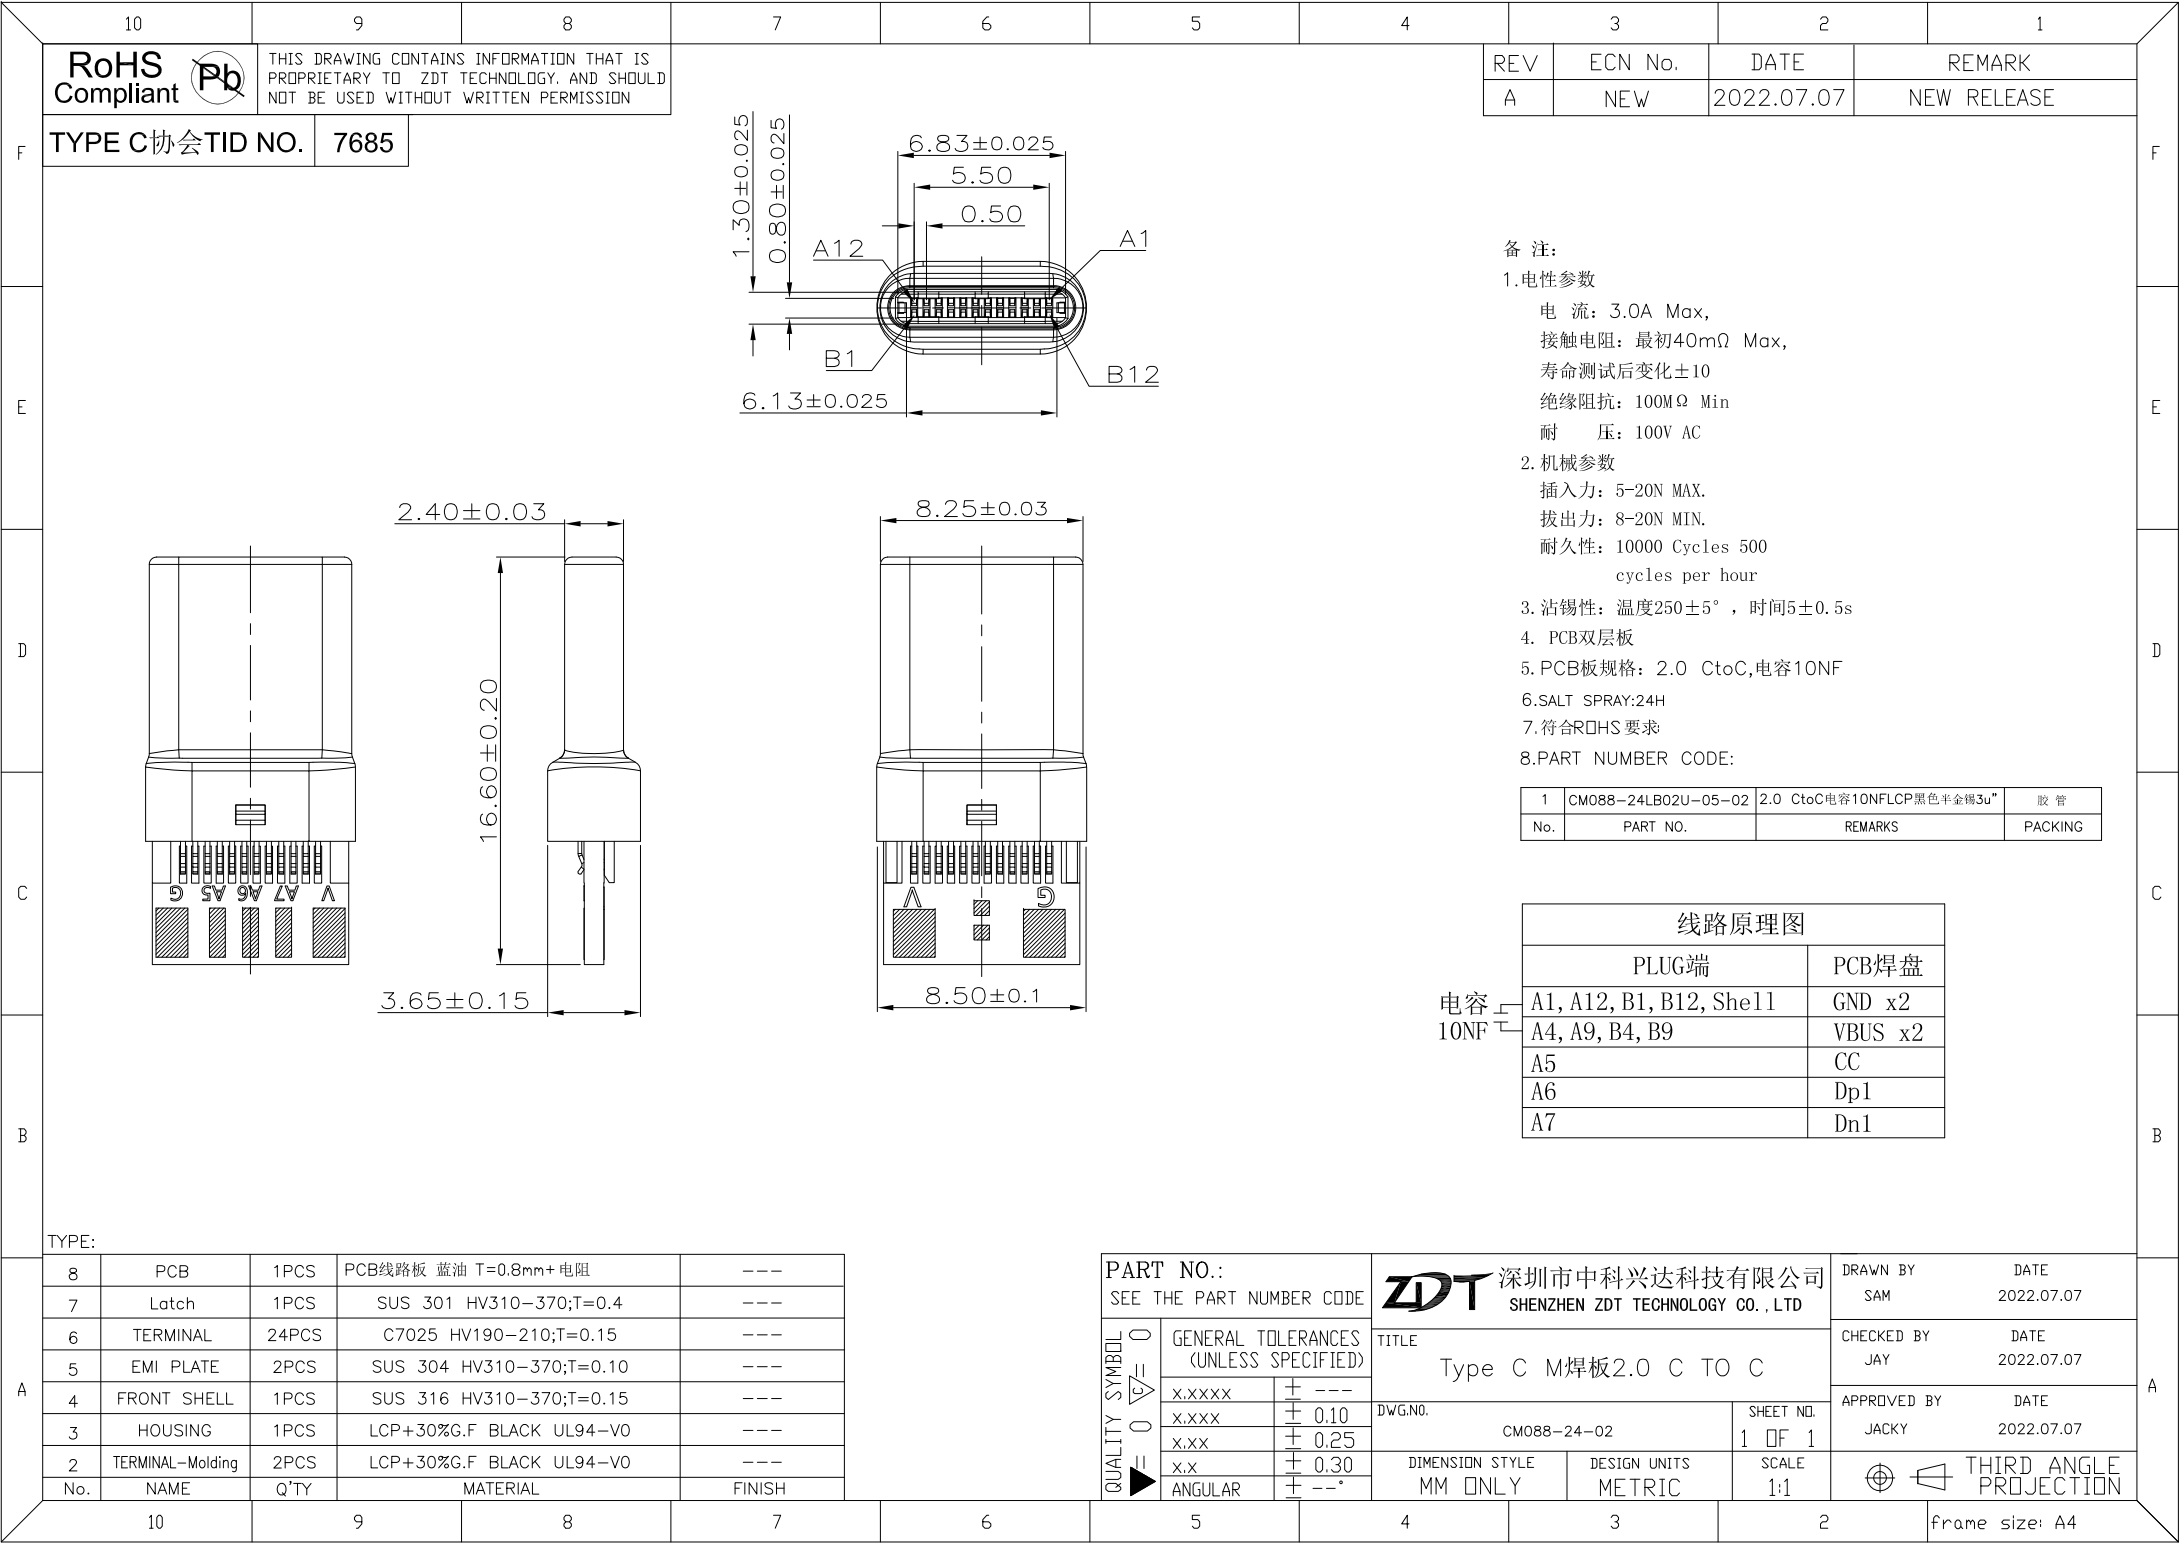

备 注:

1.电性参数

电 流: 3.0A Max,
接触电阻: 最初40mΩ Max,
寿命测试后变化±10
绝缘阻抗: 100MΩ Min
耐 压: 100V AC

2. 机械参数

插入力: 5-20N MAX.
拔出力: 8-20N MIN.
耐久性: 10000 Cycles 500
cycles per hour

3. 沾锡性: 温度250±5° , 时间5±0.5s

4. PCB双层板

5. PCB板规格: 2.0 CtoC,电容10NF

6.SALT SPRAY:24H

7.符合ROHS 要求

8.PART NUMBER CODE:

1	CM088-24LB02U-05-02	2.0 CtoC电容10NF	LCP黑色半金镀3u"	胶 管
No.	PART NO.	REMARKS	PACKING	

线路原理图	
PLUG端	PCB焊盘
A1, A12, B1, B12, Shell	GND x2
A4, A9, B4, B9	VBUS x2
A5	CC
A6	Dp1
A7	Dn1

TYPE:				
8	PCB	1PCS	PCB线路板 蓝油 T=0.8mm+ 电阻	---
7	Latch	1PCS	SUS 301 HV310-370;T=0.4	---
6	TERMINAL	24PCS	C7025 HV190-210;T=0.15	---
5	EMI PLATE	2PCS	SUS 304 HV310-370;T=0.10	---
4	FRONT SHELL	1PCS	SUS 316 HV310-370;T=0.15	---
3	HOUSING	1PCS	LCP+30%G.F BLACK UL94-V0	---
2	TERMINAL-Molding	2PCS	LCP+30%G.F BLACK UL94-V0	---
No.	NAME	Q'TY	MATERIAL	FINISH

PART NO.: SEE THE PART NUMBER CODE		ZDT 深圳市中科兴达科技有限公司 SHENZHEN ZDT TECHNOLOGY CO.,LTD		DRAWN BY SAM	DATE 2022.07.07
QUALITY SYMBOL = 0 = 0 = 0 = 0 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		TITLE Type C M焊板2.0 C TO C		
	x.xxxx	± ---	CHECKED BY JAY		
	x.xxx	± 0.10	DATE 2022.07.07		
	x.xx	± 0.25	APPROVED BY JACKY		
	x.x	± 0.30	DATE 2022.07.07		
ANGULAR ± ---*		DWG.NO. CM088-24-02	SHEET NO. 1 OF 1	THIRD ANGLE PROJECTION	
		DIMENSION STYLE MM ONLY	DESIGN UNITS METRIC	SCALE 1:1	