



SPECIFICATIONS

Current Rating:3.0AMP

Contact Resistance:10mΩ Max

Dielectric Strength:Min 1000V RMS

Operation Temperature:-40℃ to +105℃




Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PPS

Soldering Temperature: 260℃±5° 5S

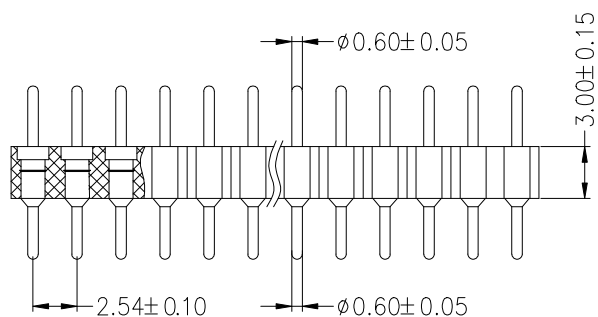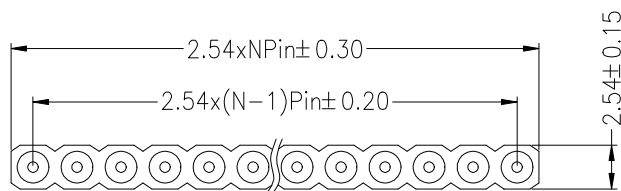

Ordering Information


3610 30 1 XX S XX 100 XX

No. of Pins
2~40

Contact Plating
G1:Gold Flash
G3:2U" Gold
G4:3U" Gold
G5:5U" Gold
G6:10U" Gold
G7:15U" Gold

Length
100=10.0mm

Stream code

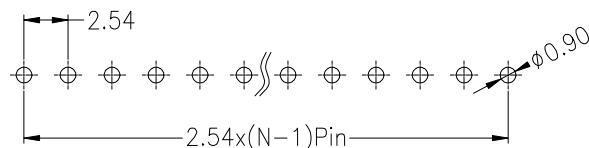

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Wei Chen

21.12.01

SCALE

FIT

UNIT mm

SIZE A4

SHEET 1/1

PROJ.

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD

Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.

3610301XXSXX100XX

TITLE:

2.54x3.0 单排双头针 L=10.0 针尖0.60