

CMOS Digital Integrated Circuits Silicon Monolithic

Features

High speed: $t_{pd} = 15 \text{ ns}$ (typ.) at $V_{CC} = 5 \text{ V}$


Low power dissipation: $I_{CC} = 4.0 \mu\text{A}$ (max) at $T_a = 25$

Balanced propagation delays: $t_{PLH} \approx t_{PHL}$

Wide operating voltage range: $V_{CC(opr)} = 2.0$ to 6.0 V

Functional Description

- 8-Channel Multiplexer

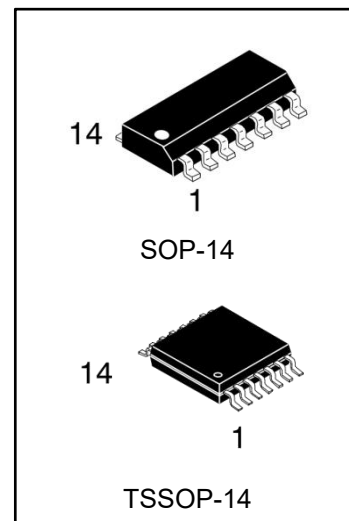

Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
74HC151DRG	SOP-14	74HC151	REEL	2500pcs/reel
74HC151PWRG	TSSOP-14	HC151	REEL	2500pcs/reel

General Description

The 74HC151 is a high speed CMOS 8-CHANNEL MULTIPLEXER fabricated with silicon gate C²MOS technology.


It achieves the high speed operation similar to equivalent LSTTL while maintaining the CMOS low power dissipation.

One of eight data input signals (D0-D7) is selected by decoding of the three-bit address input (A, B, C). The selected data appears on two outputs: non-inverting (Y) and inverting (W).

The strobe input provides two output conditions; a low level on the strobe input transfers the selected data to the outputs. A high level on the strobe input sets the Y output low and the W output high without regard to the data or select input conditions.


All inputs are equipped with protection circuits against static discharge or transient excess voltage.

Pin Assignment

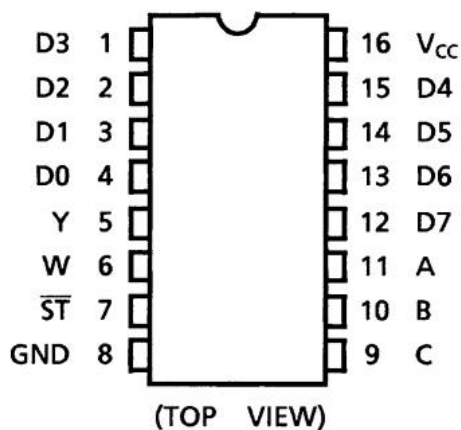

SOP-14/TSSOP-14

IEC Logic Symbol

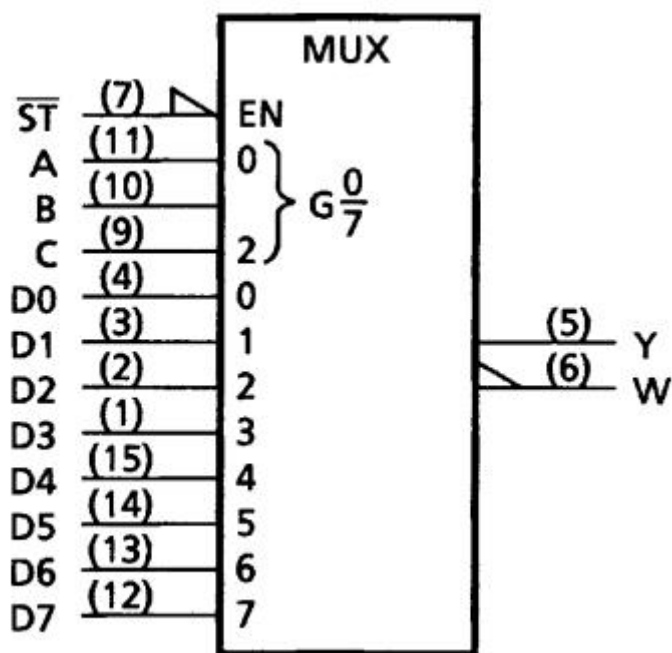


Truth Table

Inputs				Outputs	
Select			Strobe	Y	W
C	B	A	ST		
X	X	X	H	L	H
L	L	L	L	D0	$\bar{D}0$
L	L	H	L	D1	$\bar{D}1$
L	H	L	L	D2	$\bar{D}2$
L	H	H	L	D3	$\bar{D}3$
H	L	L	L	D4	$\bar{D}4$
H	L	H	L	D5	$\bar{D}5$
H	H	L	L	D6	$\bar{D}6$
H	H	H	L	D7	$\bar{D}7$

X: Don't care

System Diagram

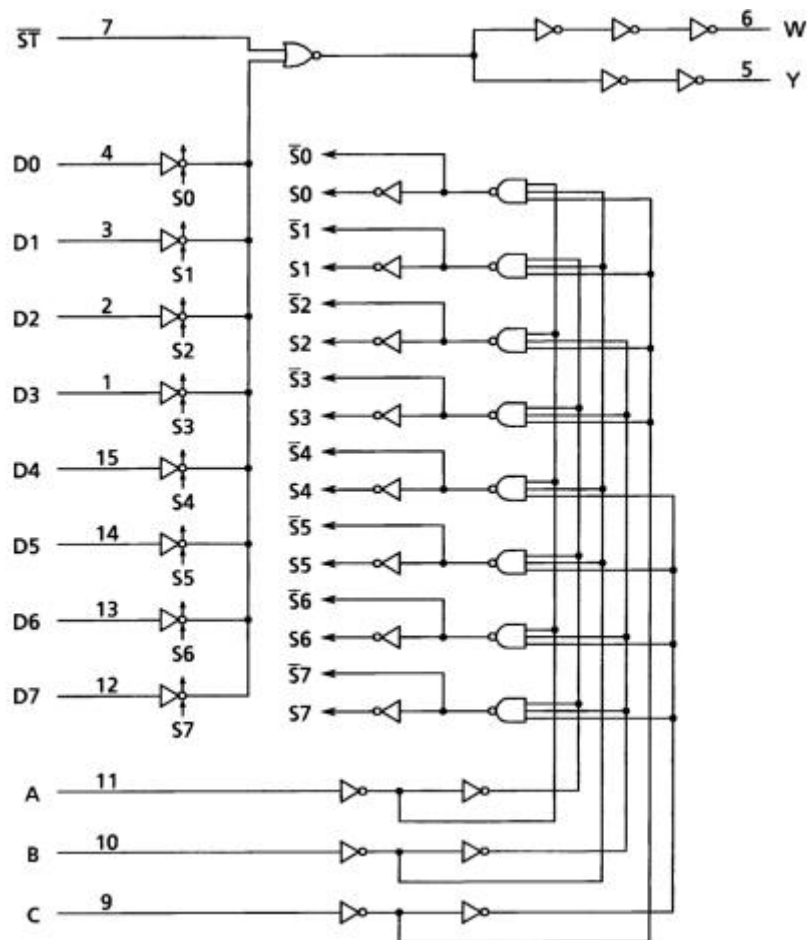

Absolute Maximum Ratings (Note)

Characteristics	Symbol	Note	Rating	Unit
Supply voltage	V_{CC}		-0.5 to 7.0	V
Input voltage	V_{IN}		-0.5 to $V_{CC} + 0.5$	V
Output voltage	V_{OUT}		-0.5 to $V_{CC} + 0.5$	V
Input diode current	I_{IK}		20	mA
Output diode current	I_{OK}		20	mA
Output current	I_{OUT}		25	mA
VCC/ground current	I_{CC}		50	mA
Power dissipation	P_D	(Note 1)	500	mW
Storage temperature	T_{stg}		-65 to 150	°C
Soldering temperature	T_L		245	°C

Note: Exceeding any of the absolute maximum ratings, even briefly, lead to deterioration in IC performance or even destruction.

Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Note 1: P_D derates linearly with -8 mW/°C above 85

Operating Ranges (Note)

Characteristics	Symbol	Test Condition	Rating	Unit
Supply voltage	V_{CC}		2.0 to 6.0	V
Input voltage	V_{IN}		0 to V_{CC}	V
Output voltage	V_{OUT}		0 to V_{CC}	V
Operating temperature	T_{opr}		-40 to 85	°C
Input rise and fall times	t_r, t_f		0 to 50	µs

Note: The operating ranges must be maintained to ensure the normal operation of the device.

Unused inputs must be tied to either VCC or GND.

Electrical Characteristics

DC Characteristics (Unless otherwise specified, Ta = 25°C)

Characteristics	Symbol	Test Condition		V _{CC} (V)	Min	Typ.	Max	Unit
High-level input voltage	V _{IH}			2.0	1.50			V
				4.5	3.15			
				6.0	4.20			
Low-level input voltage	V _{IL}			2.0			0.50	V
				4.5			1.35	
				6.0			1.80	
High-level output voltage	V _{OH}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = -20μA	2.0	1.9	2.0		V
				4.5	4.4	4.5		
				6.0	5.9	6.0		
			I _{OH} = -4 mA	4.5	4.18	4.31		
			I _{OH} = -5.2 mA	6.0	5.68	5.80		
Low-level output voltage	V _{OL}	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 20μA	2.0		0.0	0.1	V
				4.5		0.0	0.1	
				6.0		0.0	0.1	
			I _{OL} = 4 mA	4.5		0.17	0.26	
			I _{OL} = 5.2 mA	6.0		0.18	0.26	
Input leakage current	I _{IN}	V _{IN} = V _{CC} or GND		6.0			±0.1	μA
Quiescent supply current	I _{CC}	V _{IN} = V _{CC} or GND		6.0			4.0	μA

DC Characteristics (Unless otherwise specified, Ta = -40 to 85°C)

Characteristics	Symbol	Test Condition		V _{CC} (V)	Min	Max	Unit
High-level input voltage	V _{IH}			2.0	1.50		V
				4.5	3.15		
				6.0	4.20		
Low-level input voltage	V _{IL}			2.0		0.50	V
				4.5		1.35	
				6.0		1.80	
High-level output voltage	V _{OH}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = -20μA	2.0	1.9		V
				4.5	4.4		
				6.0	5.9		
			I _{OH} = -4 mA	4.5	4.13		
			I _{OH} = -5.2 mA	6.0	5.63		
Low-level output voltage	V _{OL}	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 20μA	2.0		0.1	V
				4.5		0.1	
				6.0		0.1	
			I _{OL} = 4 mA	4.5		0.33	
			I _{OL} = 5.2 mA	6.0		0.33	
Input leakage current	I _{IN}	V _{IN} = V _{CC} or GND		6.0		±1.0	μA
Quiescent supply current	I _{CC}	V _{IN} = V _{CC} or GND		6.0		40.0	μA

AC Characteristics

(Unless otherwise specified, $C_L = 15 \text{ pF}$, $V_{CC} = 5 \text{ V}$, $T_a = 25^\circ\text{C}$, Input: $t_r = t_f = 6 \text{ ns}$)

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Output transition time	t_{TLH}, t_{THL}			4	8	ns
Propagation delay time (D-Y)	t_{PLH}, t_{PHL}			15	24	ns
Propagation delay time (D-W)	t_{PLH}, t_{PHL}			15	24	ns
Propagation delay time (ST-Y)	t_{PLH}, t_{PHL}			10	17	ns
Propagation delay time (ST-W)	t_{PLH}, t_{PHL}			10	17	ns
Propagation delay time (A, B, C-Y)	t_{PLH}, t_{PHL}			19	31	ns
Propagation delay time (A, B, C-W)	t_{PLH}, t_{PHL}			19	31	ns

AC Characteristics

(Unless otherwise specified, $C_L = 50 \text{ pF}$, $T_a = 25^\circ\text{C}$, Input: $t_r = t_f = 6 \text{ ns}$)

Characteristics	Symbol	Note	$V_{CC} \text{ (V)}$	Min	Typ.	Max	Unit
Output transition time	t_{TLH}, t_{THL}		2.0		30	75	ns
			4.5		8	15	
			6.0		7	13	
Propagation delay time (D-Y)	t_{PLH}, t_{PHL}		2.0		65	140	ns
			4.5		18	28	
			6.0		15	24	
Propagation delay time (D-W)	t_{PLH}, t_{PHL}		2.0		65	140	ns
			4.5		18	28	
			6.0		15	24	
Propagation delay time (ST-Y)	t_{PLH}, t_{PHL}		2.0		36	100	ns
			4.5		12	20	
			6.0		10	17	
Propagation delay time (ST-W)	t_{PLH}, t_{PHL}		2.0		36	100	ns
			4.5		12	20	
			6.0		10	17	
Propagation delay time (A, B, C-Y)	t_{PLH}, t_{PHL}		2.0		80	180	ns
			4.5		23	36	
			6.0		19	31	
Propagation delay time (A, B, C-W)	t_{PLH}, t_{PHL}		2.0		80	180	ns
			4.5		23	36	
			6.0		19	31	
Input capacitance	C_{IN}				3		pF
Power dissipation capacitance	C_{PD}	(Note 1)			15		pF

Note 1: C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation.

$$I_{CC(opr)} = C_{PD} \times V_{CC} \times f_{IN} + I_{CC}$$


AC Characteristics

(Unless otherwise specified, $C_L = 50 \text{ pF}$, $T_A = -40 \text{ to } 85^\circ\text{C}$, Input: $t_r = t_f = 6 \text{ ns}$)

Characteristics	Symbol	$V_{CC} \text{ (V)}$	Min	Max	Unit
Output transition time	t_{TLH}, t_{THL}	2.0		95	ns
		4.5		19	
		6.0		16	
Propagation delay time (D-Y)	t_{PLH}, t_{PHL}	2.0		175	ns
		4.5		35	
		6.0		30	
Propagation delay time (D-W)	t_{PLH}, t_{PHL}	2.0		175	ns
		4.5		35	
		6.0		30	
Propagation delay time (ST-Y)	t_{PLH}, t_{PHL}	2.0		125	ns
		4.5		25	
		6.0		21	
Propagation delay time (ST-W)	t_{PLH}, t_{PHL}	2.0		125	ns
		4.5		25	
		6.0		21	
Propagation delay time (A, B, C-Y)	t_{PLH}, t_{PHL}	2.0		225	ns
		4.5		45	
		6.0		38	
Propagation delay time (A, B, C-W)	t_{PLH}, t_{PHL}	2.0		225	ns
		4.5		45	
		6.0		38	

Physical Dimensions


SOP-14

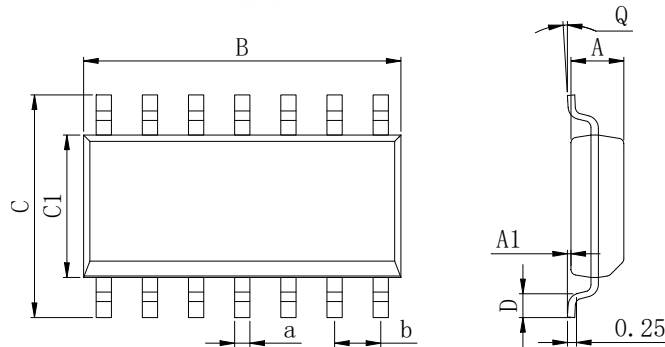

Dimensions In Millimeters(SOP14)

Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	8.55	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	8.75	6.20	4.00	0.80	8°	0.45	

TSSOP-14

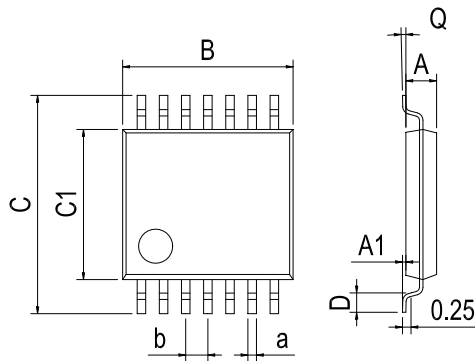

Dimensions In Millimeters(TSSOP14)

Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	0.85	0.05	4.90	6.20	4.30	0.40	0°	0.20	0.65 BSC
Max:	0.95	0.20	5.10	6.60	4.50	0.80	8°	0.25	

Revision History

DATE	REVISION	PAGE
2014-6-8	New	1-10
2023-7-22	Update encapsulation type、 Update Soldering temperature	1、 4

IMPORTANT STATEMENT:

Hanschip Semiconductor reserves the right to change its products and services without notice. Before ordering, the customer shall obtain the latest relevant information and verify whether the information is up to date and complete. Hanschip Semiconductor does not assume any responsibility or obligation for the altered documents.

Customers are responsible for complying with safety standards and taking safety measures when using Hanschip Semiconductor products for system design and machine manufacturing. You will bear all the following responsibilities: select the appropriate Hanschip Semiconductor products for your application; Design, validate and test your application; Ensure that your application meets the appropriate standards and any other safety, security or other requirements. To avoid the occurrence of potential risks that may lead to personal injury or property loss.

Hanschip Semiconductor products have not been approved for applications in life support, military, aerospace and other fields, and Hanschip Semiconductor will not bear the consequences caused by the application of products in these fields. All problems, responsibilities and losses arising from the user's use beyond the applicable area of the product shall be borne by the user and have nothing to do with Hanschip Semiconductor, and the user shall not claim any compensation liability against Hanschip Semiconductor by the terms of this Agreement.

The technical and reliability data (including data sheets), design resources (including reference designs), application or other design suggestions, network tools, safety information and other resources provided for the performance of semiconductor products produced by Hanschip Semiconductor are not guaranteed to be free from defects and no warranty, express or implied, is made. The use of testing and other quality control technologies is limited to the quality assurance scope of Hanschip Semiconductor. Not all parameters of each device need to be tested.

The documentation of Hanschip Semiconductor authorizes you to use these resources only for developing the application of the product described in this document. You have no right to use any other Hanschip Semiconductor intellectual property rights or any third party intellectual property rights. It is strictly forbidden to make other copies or displays of these resources. You should fully compensate Hanschip Semiconductor and its agents for any claims, damages, costs, losses and debts caused by the use of these resources. Hanschip Semiconductor accepts no liability for any loss or damage caused by infringement.