

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance: $20\text{m}\Omega$ Max

Withstand Voltage:500V AC/DC

Insulation Resistance: 1000M Ω Min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material:Brass


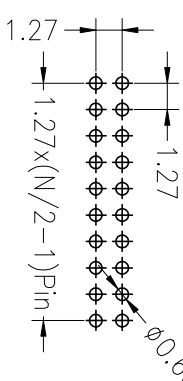




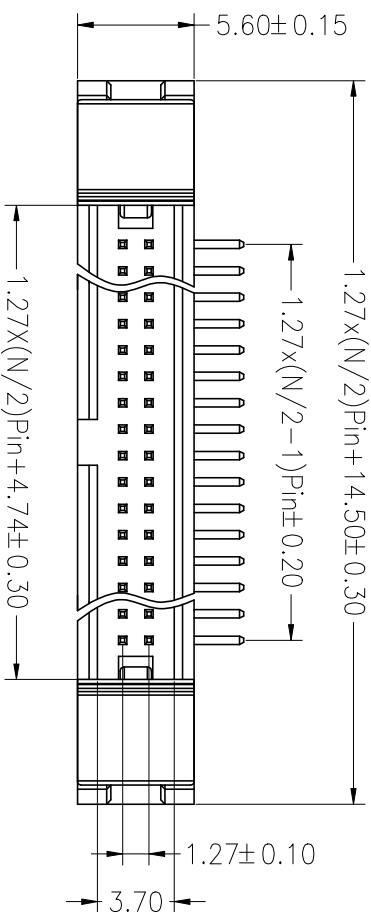
Contact Plating: Au or Sn Over Ni

Insulator Material: Polyester (UL94V-0)

Max.Processing Temp:

(PBT) $245^{\circ}\text{C} \pm 5^{\circ}\text{C}$ For ~ 10 Second







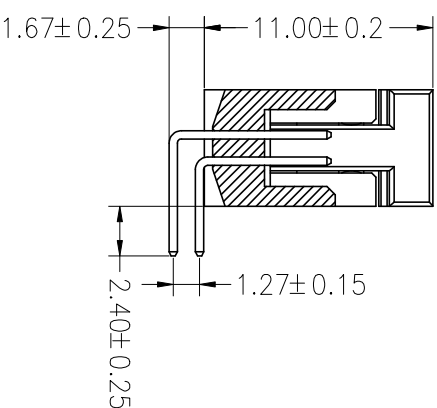

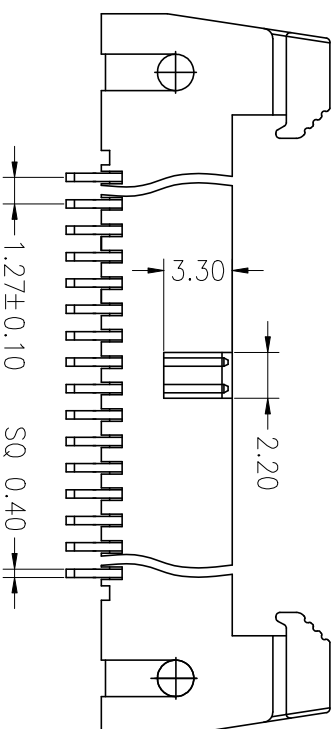



(PA6T/LCP/PA9T)260°C±5°C For 5~10 Second



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

Ordering Information

3330 XX R XX X B S X 0X

[illegible]