




CHIP COMMON MODE CHOKE

High Common Mode Impedance at High Frequency.
Excellent Noise Suppression Performance.
Small Size and Low Profile, Surface Mount Type.
Operating Temperature Range: -40°C to $+85^{\circ}\text{C}$.
RoHS Compliant.


Electrical Specifications @25°C

Part Number	Common mode Impedance (ohm $\pm 25\%$ @100M)	DCR (Ω Max)	Rated Current mA Max	Rated Volt (Vdc)	IR M(Ω Min)
HXA0805F2SF-801-N H	800	0.88	300	125	10


MECHANICAL

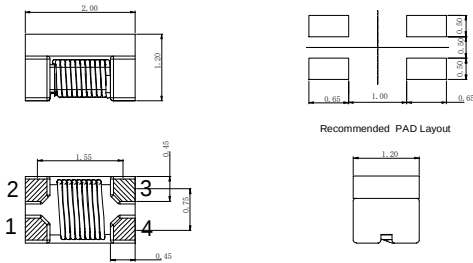

SCHEMATICS




IMPEDEANCE FREQUENCY




Unless otherwise specified all tolerances are: $\pm 0.25\text{mm}$

TAPING AND PACKING

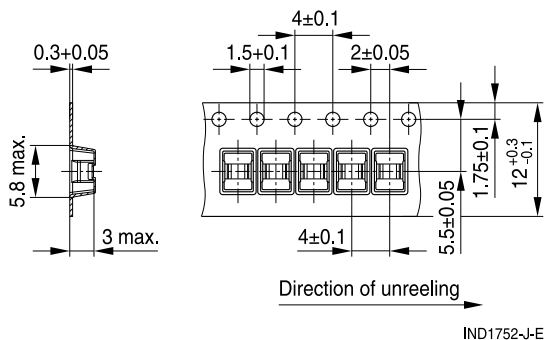

IND1752-J-E



IND1526-N

Dimensions in mm

Quantity (pcs):

3000 PCS PER REEL
10 REELS PER CARTON
30000 PCS PER CARTON