

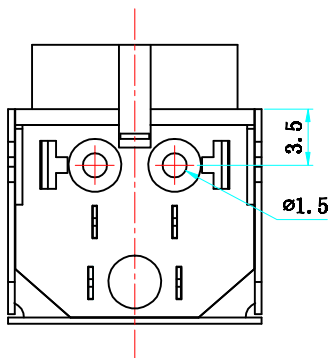
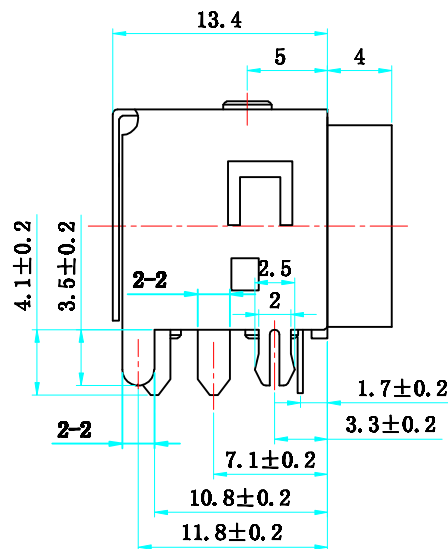


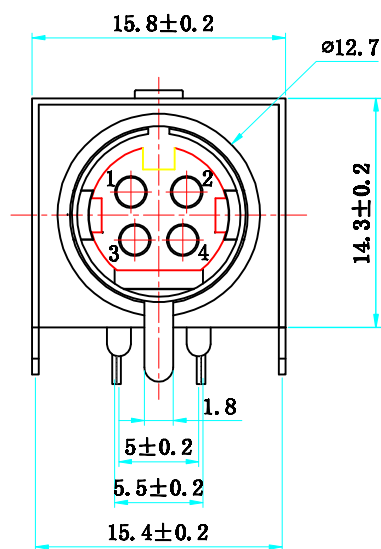

PCB板安装孔图

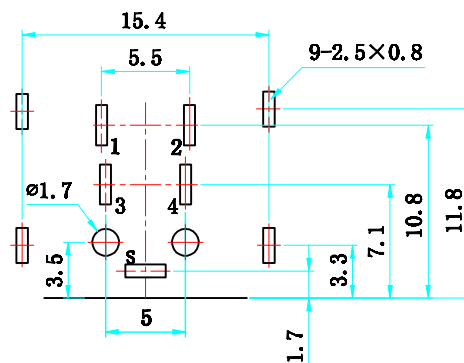

主要技术特性要求:

1. 使用温度范围:

环境温度: -25~+70℃

相对湿度: 95%(40℃)

2. 额定负荷: DC 20V 7.5A

3. 接触电阻: ≤30mΩ

4. 绝缘电阻: ≥100MΩ

5. 耐压: 250V AC (50Hz) 1min

6. 插拔力: 10-50N

7. 寿命: ≥5000次

序号	名称	数量	材料	处理	单件质量	总计质量	备注
8	包圆	1	黄铜=0.35mm	D. Cu/Sn			
7	铜壳	1	黄铜=0.35mm	D. Cu/Sn			
6	左长针	1	黄铜=0.28mm	D. Cu/Sn			
5	右短针	1	黄铜=0.28mm	D. Cu/Sn			
4	右长针	1	黄铜=0.28mm	D. Cu/Sn			
3	左短针	1	黄铜=0.28mm	D. Cu/Sn			
2	后盖	1	PBT	黑色			
1	底座	1	PBT	黑色			

								DSND		SCALE: N/A	MODEL TYPE:				
Δx						ANGLAR		±5°	DWN		VIEW: 	PART NO.:			
Δx						L ≤ 4		±0.2	CHKD		UNIT: mm/in	XKB-MPC-02T-1-3746			
Δx						4<L ≤ 16		±0.3				DWG NO.:			
Δx						16<L ≤ 63		±0.4	APPD		SIZE: A4				
MARK	DESCRIPTION				DATE	REVISED	APPROVED	L > 63	±0.5						
REVISIONS								UNSPECIFIED TOLERANCES							
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn								XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
														1/1	A0