

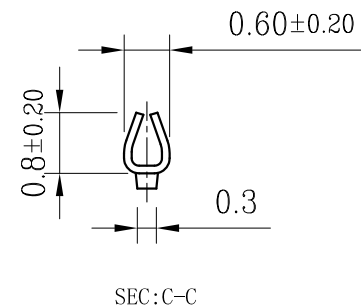




版次	变更摘要	日期
0	新产品发行	2021/3/01

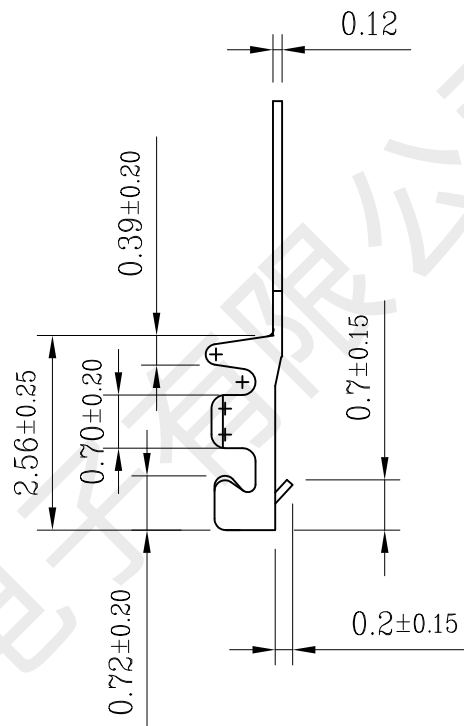

技术指标 (Technical Index):

- 工作温度 (Temperature range): $-20^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
- 额定电压 (Rated voltage): 30V AC/DC.
- 额定电流 (Rated current): 0.5A AC/DC.
- 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$.
- 耐压值 (Dielectric withstanding voltage): 200V AC/minute.
- 绝缘电阻 (Insulation resistance): $\geq 100\text{M}\Omega$.
- 适用线规 (Apply to gauge): AWG#28~#32 (0. D0.6mm MAX).
- 产品料号 (Product material No.):

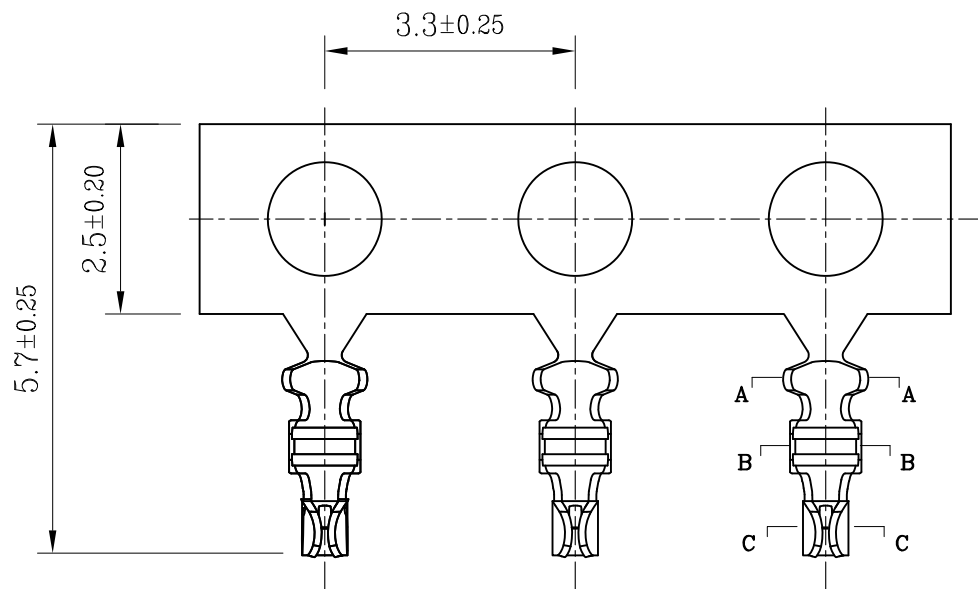

一般公差 (TOLERANCE)
X ± 0.50 XX ± 1.0
X ± 0.20 XXX ± 0.05
ANGLES $\pm 1^{\circ}$



深圳市韩下电子有限公司

品名 (TITLE)	压线端子	制图 (DR)	黄彬
料号 (DWG.NO)	HX 0.8-T	校对 (CHKD)	张伟
比例 (SCALE)	1:1	审核 (APPD)	罗小春
单位 (UNITS)	mm	张数 (SHEET)	1 OF 1
尺寸 (SIZE)	A4	REV	A