
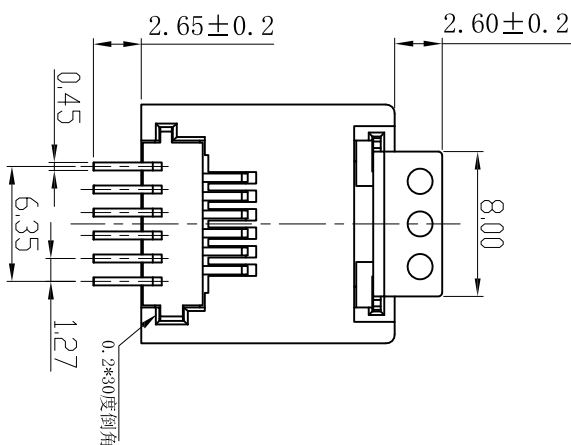
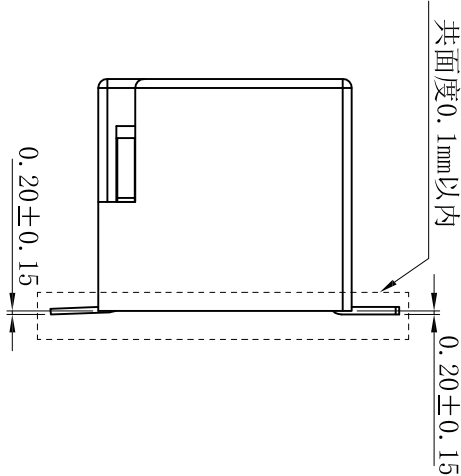


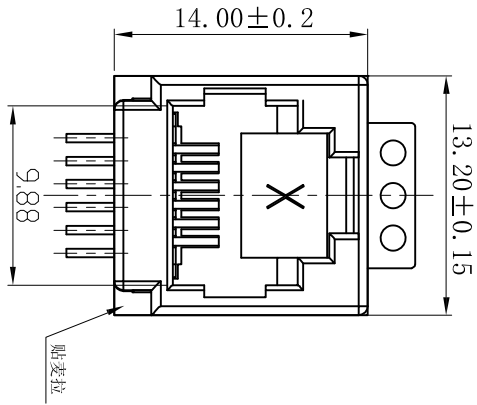

电气特性




1. 额定电压:125 VAC RMS
2. 额定电流:1.5 AMP
3. 接触电阻:20 mΩ MAX
4. 绝缘电阻:1000 MΩ MIN @500 VDC
5. 耐压强度:1000 V AC 或 1500V DC RMS @ 0.5mA 50Hz 或 60Hz 一分钟

环境特性

1. 储存温度: -40℃~+85℃
相对湿度<80%
2. 工作温度: -40℃~+85℃
波峰焊温虚:260±5℃ 5~10S

机构特性:

1. 塑壳材质:LCP 黑色, UL94V-0
2. 扁针材质:C5191-H T=0.30±0.01
3. 扁针电镀:接触区镀金+3U", 镍底30-50u", 镀亮锡100-120u".
4. 卡勾:C2680-EH T=0.35±0.01.
电镀镍底50-80u", 亮锡100-120u"
5. 可靠性:最少750次插拔,
6. 插入/拔出力: 30N MAX.
7. 配合强度: 50N MIN 60S±5S.

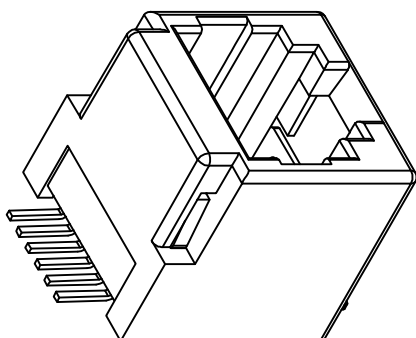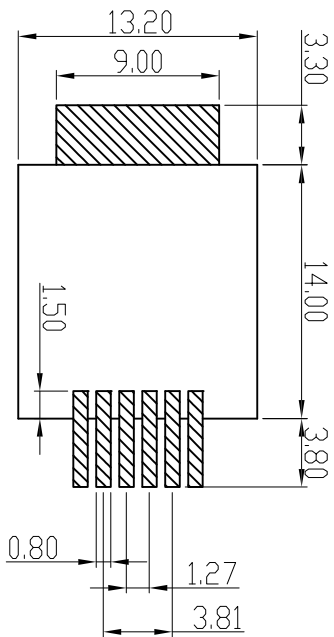

PCB LAYOUT/TOP VIEW

TOLERANCE=±0.05

TOLERANCE TABLE

	±0.30
.0	±0.20
.00	±0.05
.000	

APPROVED:

DATE:

CHECKED:

DATE:

DRAWN:

L. YUN

TITLE:

深圳市灿科盟实业有限公司
Ckmtw CHANKLEMENT INDUSTRY CO., LTD

RJ11-6P/6C 52E SMT 立贴 全塑 黑色

PART. NO. R-RJ11M06P-A000

UNIT	mm	SCALE	free	REV.	A	HY04
FILE NO.	Ckmtw-RJ11-0068					