


4

3

2


1

LOC	DIST	REVISIONS				
GP	00	P	LTR	DESCRIPTION	DATE	APVD
			C	REV PER ECO-06-006253	16MAR06	RG MP

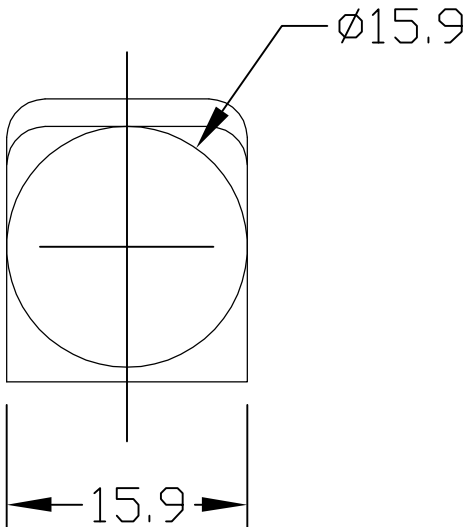

- 5 CABLE ENTRY OF BOOT IS MOULDED SOLID AND CROPPED TO SUIT CABLE USED BY CUSTOMER.
4. MATERIAL: ALL COLORS TO BE FIRE RETARDANT GRADE PVC 55 SHORE A, RATED TO UL94V-0. COLORS: SEE TABLE
3. FINISH: GLOSSY, CLEAN WITH NO INTERNAL & EXTERNAL BURRS.
2. ITEMS PROVIDED TO THIS SPECIFICATION SHALL BE IDENTIFIED ON THE CONTAINER WITH THE FOLLOWING INFORMATION: PART NUMBER & DATE CODE OF MANUFACTURE.
1. PART NUMBER CHANGES AND OR DESIGN CHANGES AFFECTING ITEM INTERCHANGEABILITY REQUIRE PRIOR TYCO APPROVAL AND AUTHORIZATION BY REVISION TO THIS DRAWING.

1651003-4	BLUE
1651003-3	GREY
1651003-2	RED
1651003-1	BLACK
TYCO PN	COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 28AUG00 NGUYEN/GRZYBOWSKI		tyco Electronics		Tyco Electronics Corporation		
		CHK —		Harrisburg, PA 17105-3608				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME				
		APVD 25FEB05		INSULATION BOOT SIZE #4 AND #8 —				
		PRODUCT SPEC						
		—						
		APPLICATION SPEC						
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
—		—		A3	00779	C-1651003	—	
CUSTOMER DRAWING						SCALE	SHEET	REV
						1:1	1 OF 1	C