

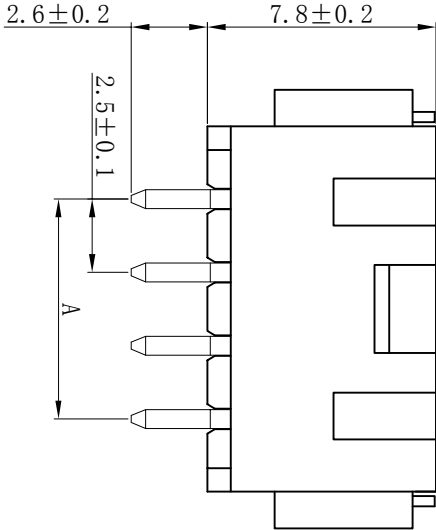
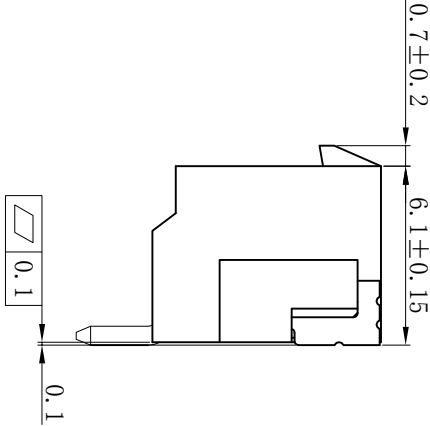
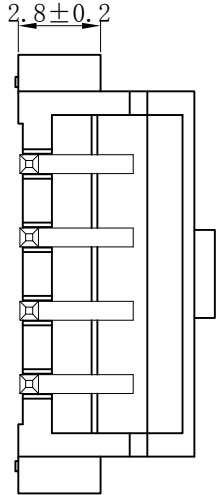


安装尺寸 Mounting Measurement

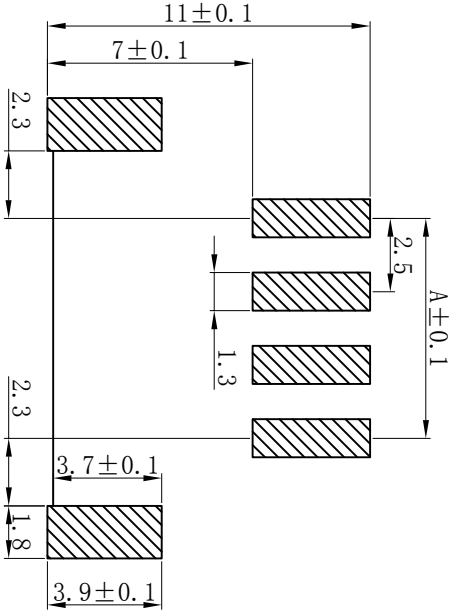

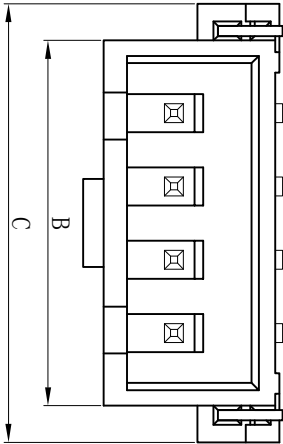


技术要求Specification:

- 1、材质Material: Rubber shell:PA9T UL94V-0
铜针PIN:H65 焊片SOLDER PATCH:磷铜 C5191 (Plating: NiSn)
- 2、额定电流Current rating: 3A max
- 3、额定电压 Voltage rating: 250V AC/DC
- 4、温度范围 Temperature range: -25℃to+85℃
- 5、接触电阻 Contact resistance: $\leq 20m\Omega$
- 6、绝缘电阻 Insulation resistance: $\geq 1000M\Omega$
- 7、耐压 Withstand voltage: 1000V AC/minute
- 8、插针的固定力 Fixing force of pins: $\geq 18N$
- 9、适配的插头 Adaptable plug: HX25034-Y
- 10、适用基板厚度 Applicable PC board thickness: SMT
- 11、包装方式: ①散装: ②管装: ③编带:
Package: ①Loosen Package: ②Pipe Package: ③Tape And Reel Package;
- 12、产品无严重损伤、缺针、长短针、旋转针等缺陷:
插针镀层无脱落、起皮、发黄等缺陷。
The product has no defects such as serious injury, lack of needle, long needle and rotating needle.
The coating of the pin has no defects such as abscission, peeling and oxidable.



C	9.95	12.45	14.95	17.45	19.95	22.45	24.95	27.45	29.95	32.45	34.95	37.45	39.95	42.45
B	7.45	9.95	12.45	14.95	17.45	19.95	22.45	24.95	27.45	29.95	32.45	34.95	37.45	39.95
A	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0
尺寸 孔位	2	3	4	5	6	7	8	9	10	11	12	13	14	15

未注公差表 UNNOTED TOLERANCE TABLE			设计 DRAWN BY		王鹏程		产品名称 PRODUCT NAME		卧贴针座 ANGLE WAFER		
≤3		± 0.1	审核 CHECKED BY		郑建银		产品型号 PRODUCT MODEL		HA-AWB		
≤10		± 0.2	批准 APPROVED BY		沈才义		红星代号 HONGXING NO		HX25035-AWB		
≤20		± 0.3	日期 DATE		2021.03.30						
≤35		± 0.4	视图 VIEW		单位 UNIT		页码 SHEET				
≤50		± 0.5			mm		1/1				
≤75		± 0.6									
≤100		± 0.8									
ANGLE		± 5°									
 ® 浙江红星电器有限公司 Zhejiang Hongxing Electrical Co., Ltd.											