

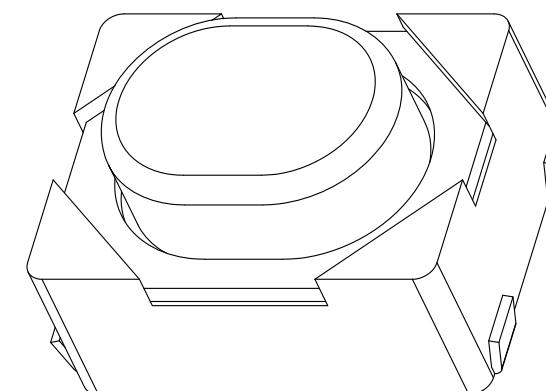


RoHS Compliant

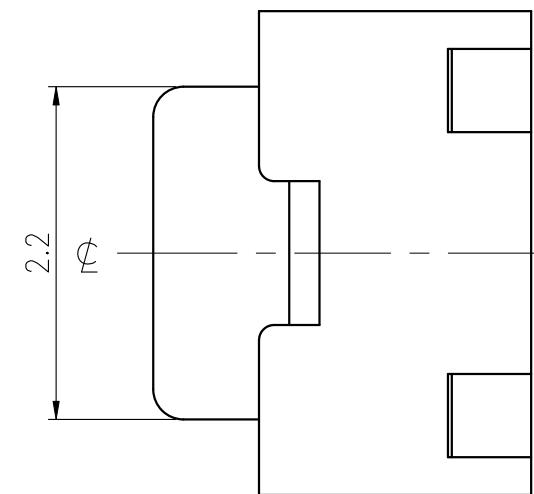


REVISIONS


Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2014.10.13	Max Chen	C			
B				D			
SPECIFICATIONS							
RATING	DC16V 50mA			TIMING			
CONTACT RESISTANCE	500mΩ MAX.			OPERATION (TORQUE)	500±100gf		
INSULATION RESISTANCE	DC500V – 100MΩ MIN.			STROKE (ANGLE)	0.2±0.1 mm		
WITHSTAND VOLTAGE	AC250V – 1 MINUTE.			CONTACT RESISTANCE	1Ω MAX.		
REMARKS:				(AFTER 200,000 CYCLES LIFE TEST)			

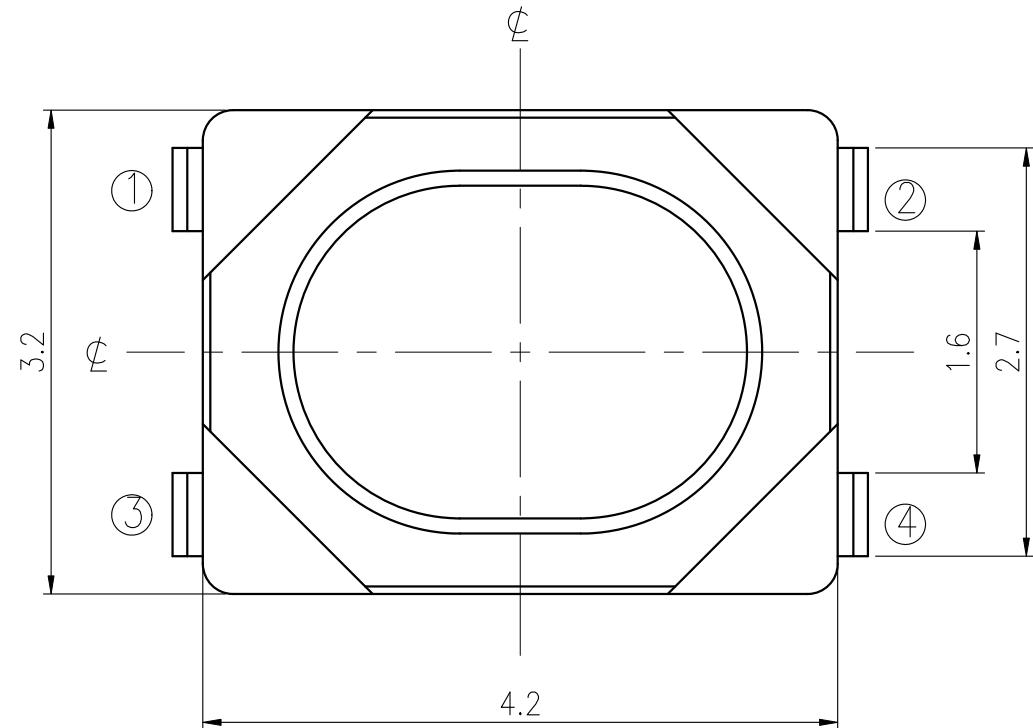

SCHEMATIC



RECOMMENDED P.C.B LAYOUT

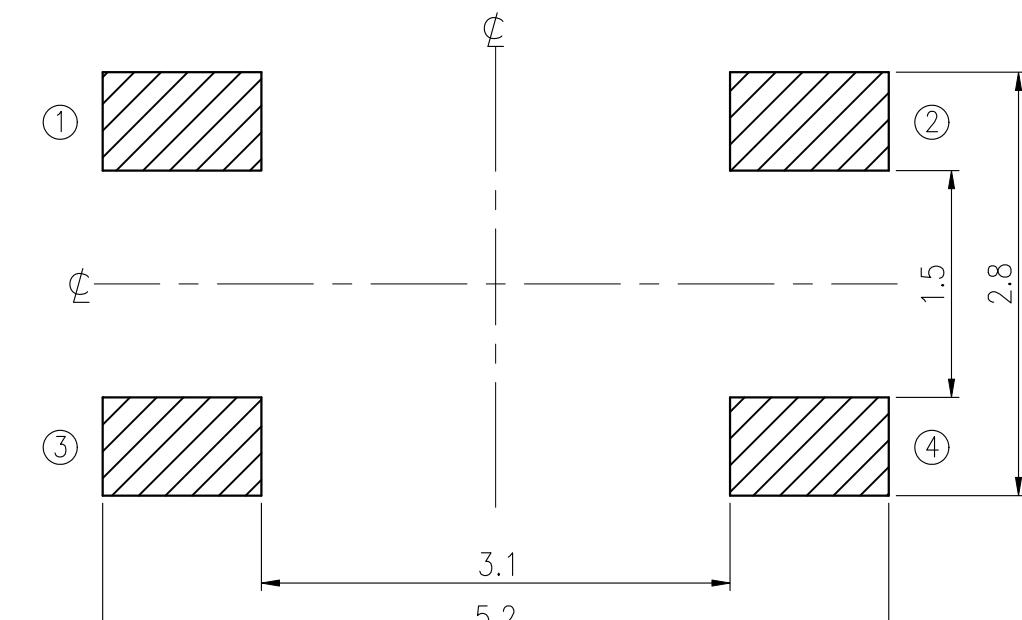

HATCHED AREA SHOWS SOLDERING LAND


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL
			DRAWER	Max Chen		
CHECKED						
	UNIT mm	SCALE 20/1	REVIEWED			
			APPROVALS	Dennis Hung	2014.10.13	NO. NTC013-AA1J-A500T

TAIWAN MISAKI ELECTRONICS CO., LTD.

RoHS Compliant

Dennis Hfung

2016.07

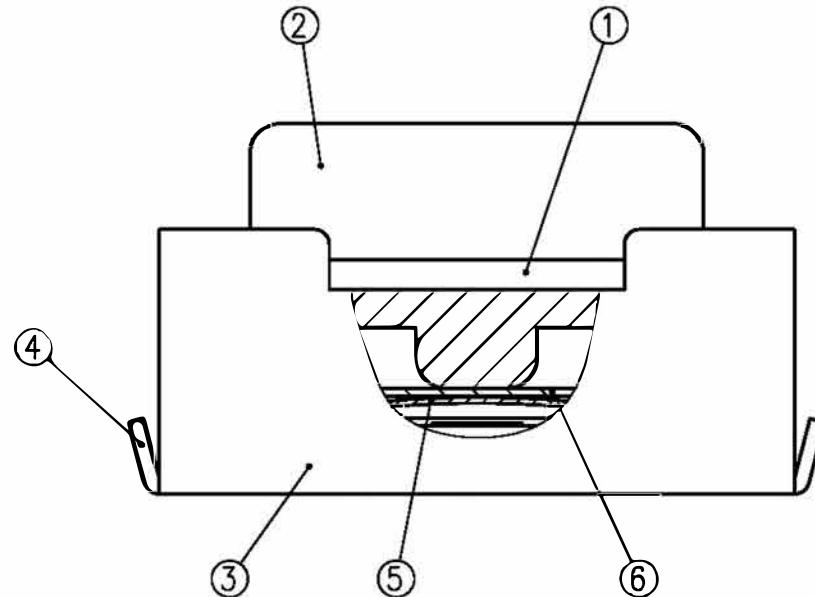

NO.	PART NAME	Q'TY	MATERIAL	SPECIFICATION		
				SIGNATURES		DATE
				DRAWN	Jane Shen	2016.07.06
				CHK'D		
				REV'D		
				APP'D		
SYM	DESCRIPTION	DATE	APPROVED			
	TAIWAN MISAKI ELECTRONICS CO.,LTD.					
					NO.	TC013-15
					DWG NO.	

# SPECIFICATIONS FOR TACT SWITCH

RoHS Compliance

Model:

1. Test condition:

Standard test conditions shall be 5~35°C in temperature, 45~85%RH in humidity and 86~106Kpa in atmospheric pressure. Should any doubt arise in judgment, tests shall be conducted at 20±2°C in temperature, 60~70% RH in Humidity and 86~106 kpa in atmospheric pressure.

2. Operating temperature range: -40 ~ +85°C

Preservative temperature range: Single condition: -40 ~ +85°C ; Taping condition: -20 ~ +60°C


3. Construction:

3.1 Shape and dimension are subject to attached drawing regulation.

3.2 Appearance: Whole should be a good completion, no rust, no crack and good plating.

4. Rating: 16V D.C. , 50mA.

5. Electrical Performance:


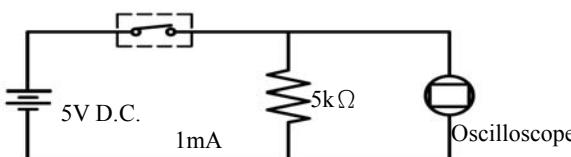
No.	Items	Test conditions	Specifications
5.1	Contact Resistance	Shall be measure at 1kHz±200Hz (MAX. 20mV, MAX. 50mA.) or 1 A, 5V D.C. By voltage drop method.	500mΩ Max.
5.2	Insulation Resistance	Shall be measured by applying 500V D.C. Between all terminals and between the terminals and the frame for 1 minute ± 5 seconds.	100 MΩ Min.
5.3	Withstand Voltage	250V A.C. (50~60Hz 2mA) shall be applied between all terminals and between the terminals and the frame for 1 minute.	No dielectric breakdown shall be occurred.
5.4	Bounce	<p>Lightly striking the center of the stem at a rate encountered in normal use ( 3 to 4 operations per sec.)</p> <p>Switch</p> 	<p>ON: 10m sec Max. OFF:10m sec Max.</p>

			APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	SPEC NO.
			Dennis Hung 2009.10.08			Max Chen 2009.10.08	SE-TC30N
A	NEW RELEASE						PAGINATE
SYM	DISCRIPTION	DATE					1/3

# SPECIFICATIONS FOR TACT SWITCH

RoHS Compliance

## 6. Mechanical Performance:

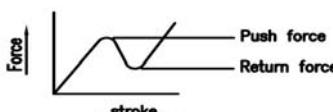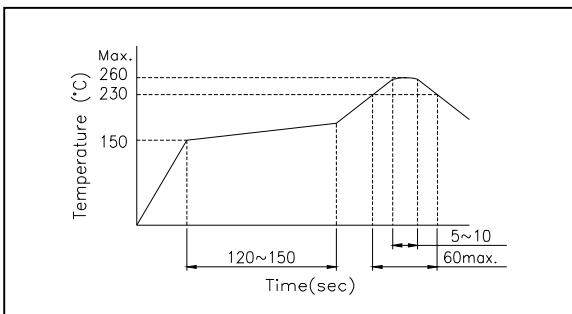No.	Items	Test conditions	Specifications
6.1	Operating Force	Placing the switch such that the direction of switch operation is vertical and then gradually increasing the load applied to the center of the stem, the maximum load required for the switch to come to a stop shall be measured.  	$500 \pm 100$ gf.
6.2	Travel	Placing the switch such that the direction of switch operation is vertical and then applying a below static load to the center of the stem, the travel distance for the switch to come to a stop shall be measured.	$0.2 \pm 0.1$ mm.
6.3	Control Strength	The static load of 3kgf shall be applied on top of the terminal in every direction for 1 minute, in any direction on condition of once for one terminal.	Shall be free from extreme wobble, vent or electrical and mechanical abnormality. Not deformation of the appearance.
6.4	Solderability	Soldering temperature: $235 \pm 5^\circ\text{C}$ . Soldering time: $2 \pm 0.5$ seconds.	75% or more of surface area of the portion immersed in solder shall be satisfied.
6.5	Solder Heat Resistance	(1) Manual soldering temperature: Temperature: $350^\circ\text{C}$ Max. Time: 3 Sec. Max. (2) Reflow Soldering: Number of reflow pass: 2 cycles.  	Shall be free from pronounced deforming in appearance. Of item 5.1~5.4 shall be satisfied. Of item 6.1~6.2 shall be satisfied.

			APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	SPEC NO.
			Dennis Hung 2009.10.08			Max Chen 2009.10.08	SE-TC30N
A	NEW RELEASE						PAGINATE
SYM	DISCRIPTION	DATE					2/3

# SPECIFICATIONS FOR TACT SWITCH

RoHS Compliant

## 7. Weather Performance:

No.	Items	Test conditions	Specifications												
7.1	Humidity Test	(1) Temperature: $60\pm2^{\circ}\text{C}$ . (2) Relative humidity: 90~95% (3) Duration of test: 500 Hour. (4) Take off a drop water. (5) Standard conditions after test: 1 Hour.	Contact resistance: $1\Omega$ Max Of item 5.2~5.4 shall be satisfied. Of item 6.1~6.2 shall be satisfied.												
7.2	Heat Test	(1) Temperature: $85\pm2^{\circ}\text{C}$ . (2) Duration of test: 500 Hour. (3) Standard conditions after test: 1 Hour.													
7.3	Cold Test	(1) Temperature: $-40\pm2^{\circ}\text{C}$ . (2) Duration of test: 500 Hour. (3) Take off a drop water. (4) Standard conditions after test: 1 Hour.													
7.4	Temperature cycle	(1) Test cycle: 20 cycles. (2) Standard conditions after test: 1 Hour.	<table border="1"> <thead> <tr> <th></th> <th>Temperature</th> <th>Duration of test</th> </tr> </thead> <tbody> <tr> <td rowspan="4">1 cycles</td> <td><math>20\pm5^{\circ}\text{C}</math></td> <td>1 Hour</td> </tr> <tr> <td><math>-40\pm2^{\circ}\text{C}</math></td> <td>1 Hour</td> </tr> <tr> <td><math>20\pm5^{\circ}\text{C}</math></td> <td>1 Hour</td> </tr> <tr> <td><math>85\pm2^{\circ}\text{C}</math></td> <td>1 Hour</td> </tr> </tbody> </table>		Temperature	Duration of test	1 cycles	$20\pm5^{\circ}\text{C}$	1 Hour	$-40\pm2^{\circ}\text{C}$	1 Hour	$20\pm5^{\circ}\text{C}$	1 Hour	$85\pm2^{\circ}\text{C}$	1 Hour
	Temperature	Duration of test													
1 cycles	$20\pm5^{\circ}\text{C}$	1 Hour													
	$-40\pm2^{\circ}\text{C}$	1 Hour													
	$20\pm5^{\circ}\text{C}$	1 Hour													
	$85\pm2^{\circ}\text{C}$	1 Hour													

## 8. Durability:


No.	Items	Test conditions	Specifications
8.1	Life Test (5V D.C. , 5mA.)	(1) Operating speed:120 cycles/minute. (2) Push force: Maximum value of operation force. (3) Operation number: <u>200,000</u> times.	Contact Resistance: $1\Omega$ MAX.  Operating Force: Within $\pm30\%$ of specifications. Of item 5.2 shall be satisfied. Of item 6.2 shall be satisfied.

			APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	SPEC NO.
			<i>Dennis Hung</i> 2009.10.08			Max Chen 2009.10.08	SE-TC30N
A	NEW RELEASE						
SYM	DISCRIPTION	DATE					3/3

# THE PACKING SPECIFICATIONS

RoHS Compliant

## 1. STRUCTURE AND MATERIALS

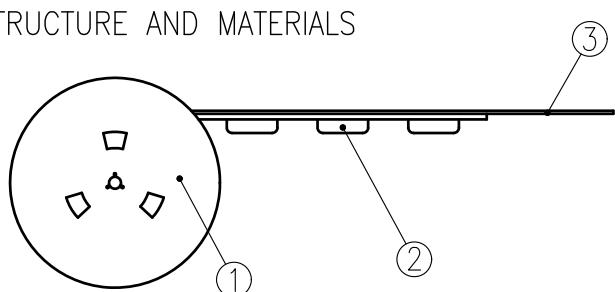

NO.	PARTS NAME	MATERIALS
(3)	COVER TAPE	POLYESTER
(2)	CARRIER TAPE	POLYSTYRENE
(1)	REEL	POLYSTYRENE

2. PACKAGING QUANTITY : 2,900 PCS/REEL

3. MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.

4. SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.

5. STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN  $165^\circ \sim 180^\circ$ .


6. THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.

7. TAPE AND REEL PER EIA-481.


8. DIMENSIONS :



## CARRIER TAPE

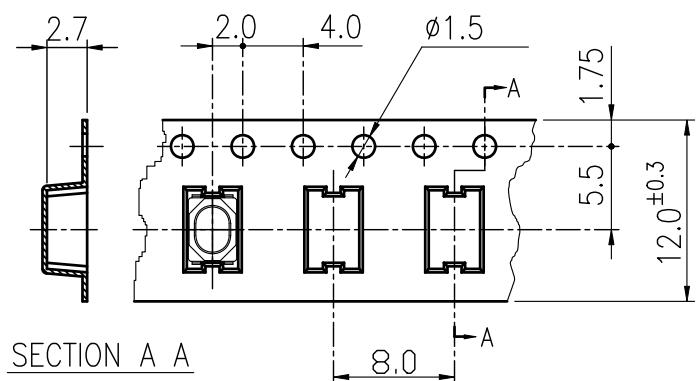


## REEL

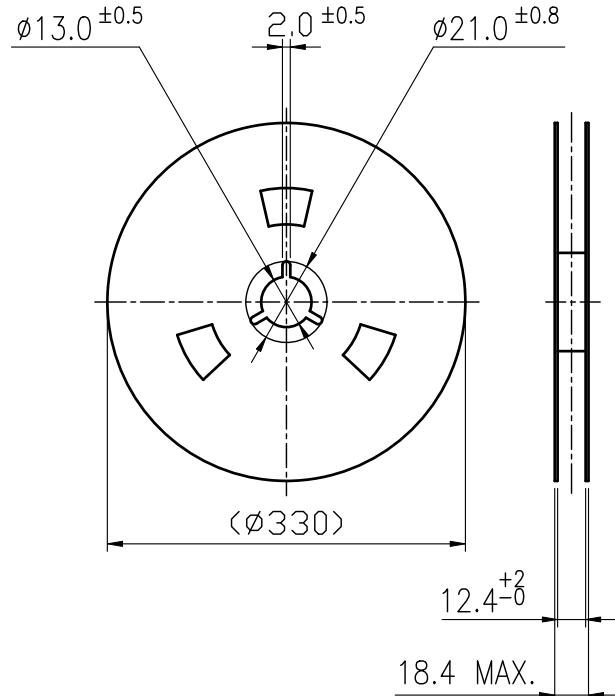

## DRAWING DIRECTION

## COVER TAPE



SYN	DESCRIPTION	DATE	APPROVED	APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				Dennis	Hung		Jane Shen 2016.05.24	NTC013-AA1J-A500TW
								PAGINATE. 1/1
								SPEC NO. P-433