

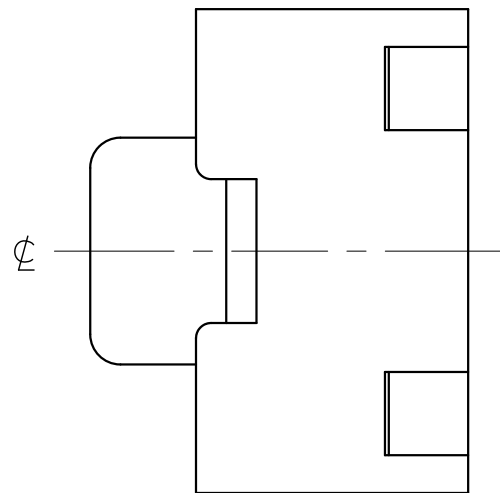


RoHS Compliant


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2012.12.11	Max Chen	C			
B				D			
SPECIFICATIONS							
RATING		DC16V 50mA		TIMING			
CONTACT RESISTANCE		500mΩ MAX.		OPERATION (TORQUE)			
INSULATION RESISTANCE		DC500V – 100MΩ MIN.		STROKE (ANGLE)		0.2±0.1 mm 	
WITHSTAND VOLTAGE		AC250V – 1 MINUTE.		CONTACT RESISTANCE		1Ω MAX.	
REMARKS:				(AFTER		CYCLES LIFE TEST)	

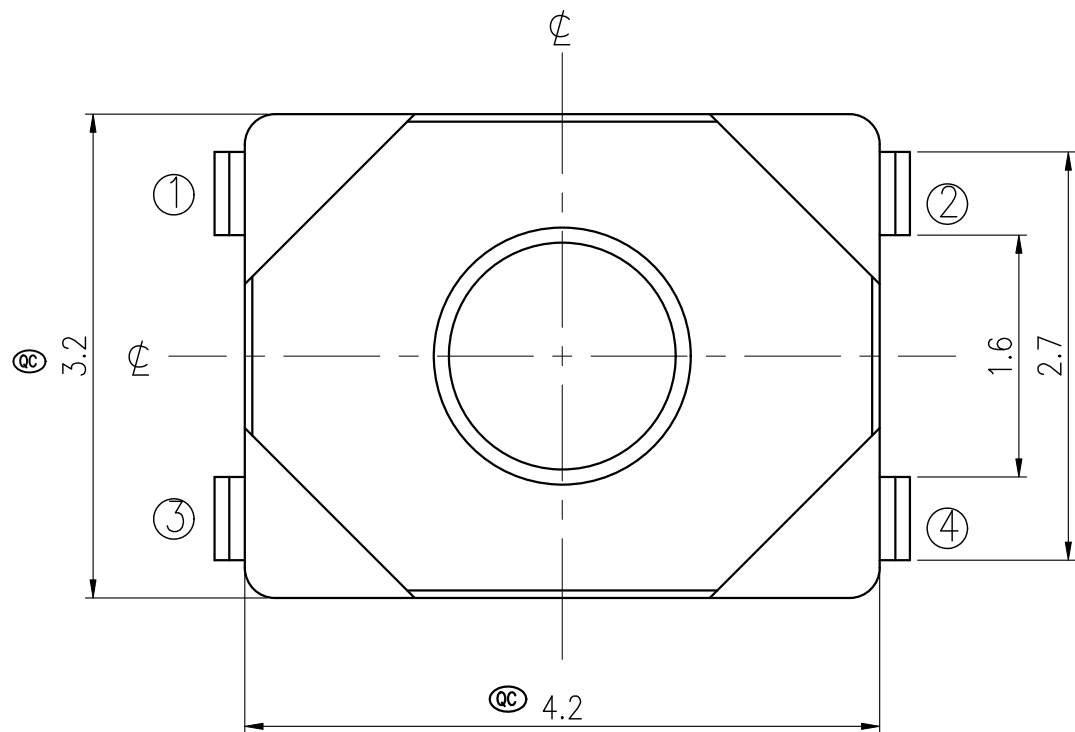


SCHEMATIC



RECOMMENDED P.C.B LAYOUT

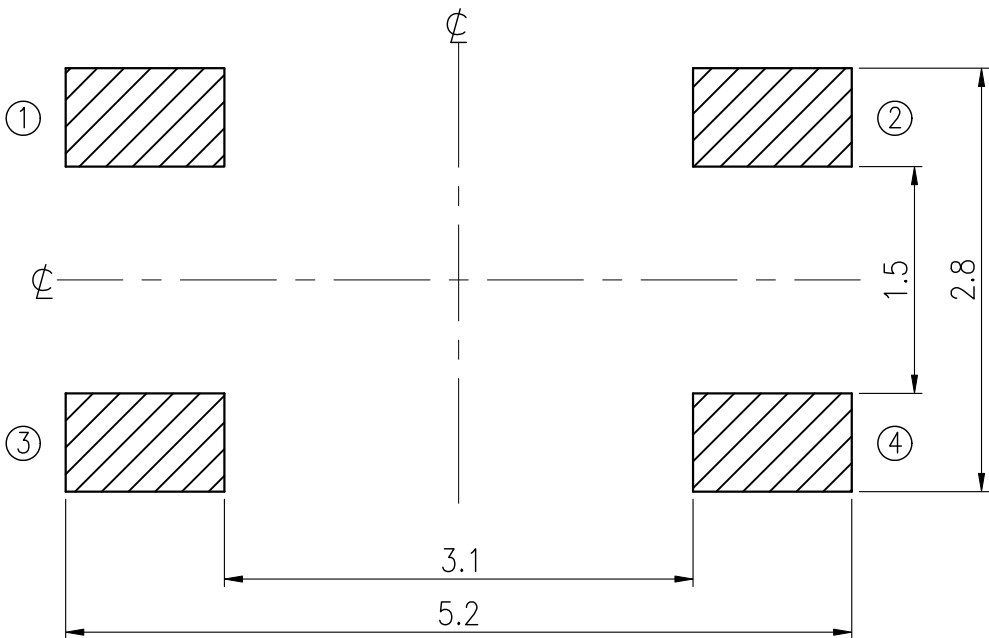

HATCHED AREA SHOWS SOLDERING LAND

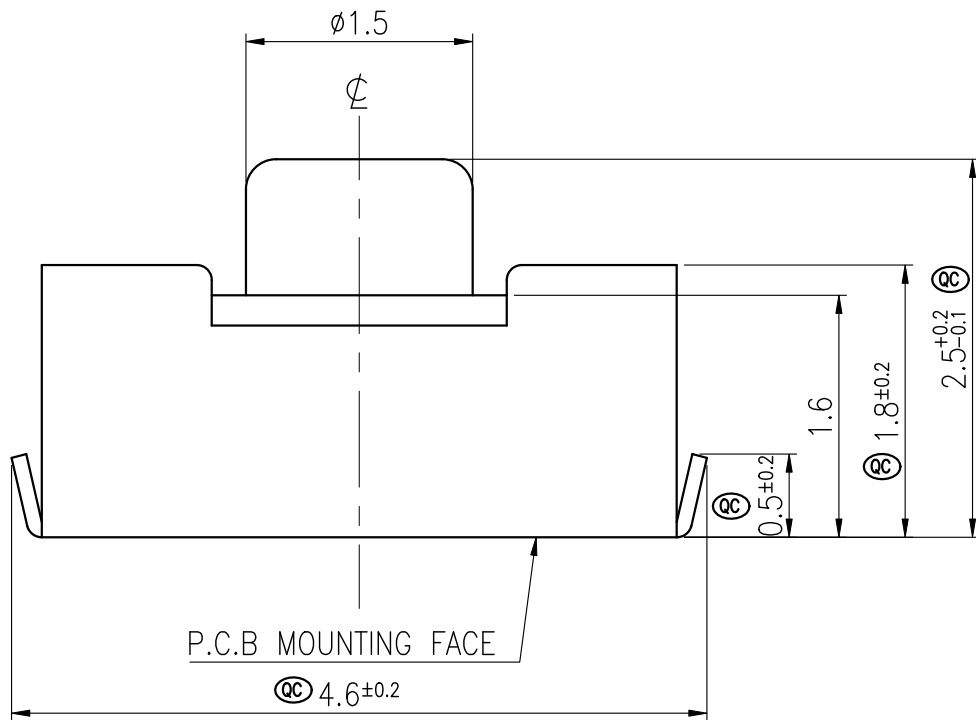

MODEL NO.	OPERATING FORCE	LIFE
NTC013-BA1J-B160T	160±50gf	100,000
NTC013-BA1J-B260T	260±70gf	50,000
NTC013-BA1J-B400T	400±100gf	100,000

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES	DATE	MODEL
			DRAWER Max Chen	2012.12.11	TACT SWITCH
			CHECKED		
			REVIEWED		NO. SEE MODEL NO.
			APPROVALS Dennis Hung	2012.12.11	

TAIWAN MISAKI ELECTRONICS CO., LTD.