



RoHS Compliant

For Reference Only


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2017.12.11	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)		160±50 gf	
INSULATION RESISTANCE		DC500V – 100MΩ MIN.		STROKE (ANGLE)		0.25±0.15 mm	
WITHSTAND VOLTAGE		AC250V – 1 MINUTE.		LIFE		100,000 CYCLES	
REMARKS:							

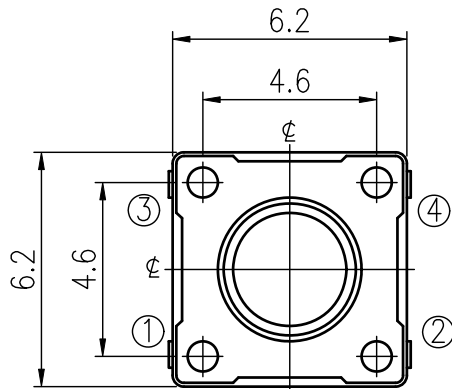

SCHEMATIC




P.C.B MOUNTING PLAN

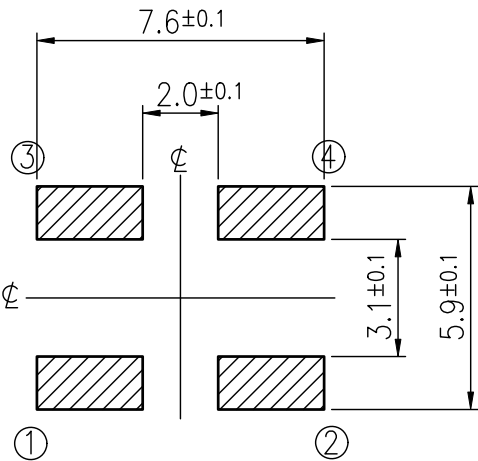


HATCHED AREA SHOWS SOLDERING LAND

ALL TERMINALS TO BE
COPLANAR WITHIN 0.1mm

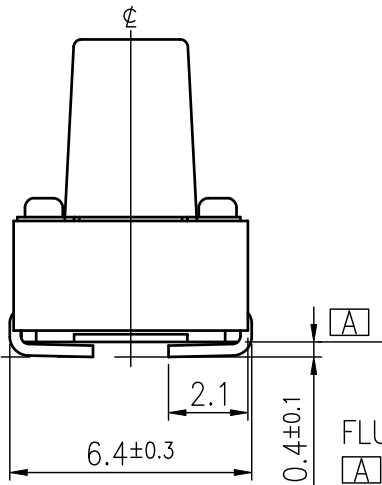

FLUSH WITH SURFACE
[A] TO BELOW.

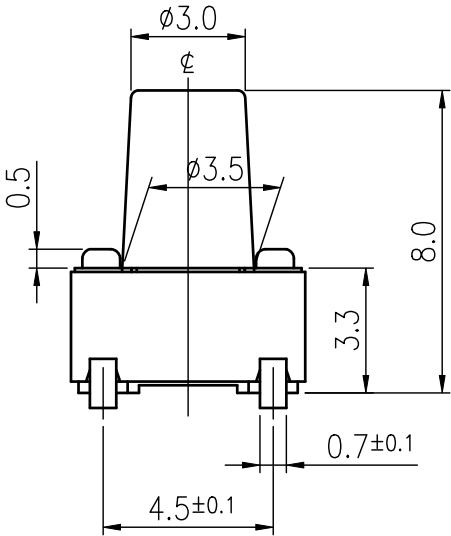

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2017.12.11	TITLE TACT SWITCH
			CHECKED			
	UNIT mm	SCALE 5/1	REVIEWED	Landy Pu	2017.12.11	NO. NTC014-AA1U-H160TJ
			APPROVALS	Dennis Hung	2017.12.11	

TAIWAN MISAKI ELECTRONICS CO., LTD.