

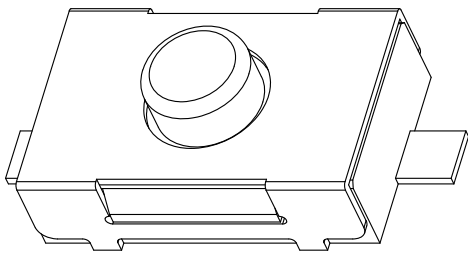


RoHS Compliant




REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2019.08.22	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)			
INSULATION RESISTANCE		DC500V-100MΩ MIN.		STROKE (ANGLE)		0.25±0.1 mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE		LIFE			
REMARKS:							

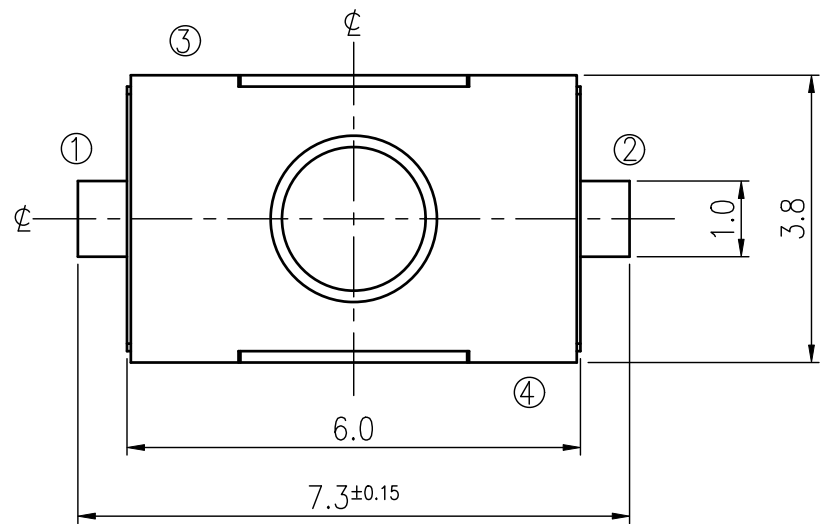

SCHEMATIC



P.C.B LAYOUT

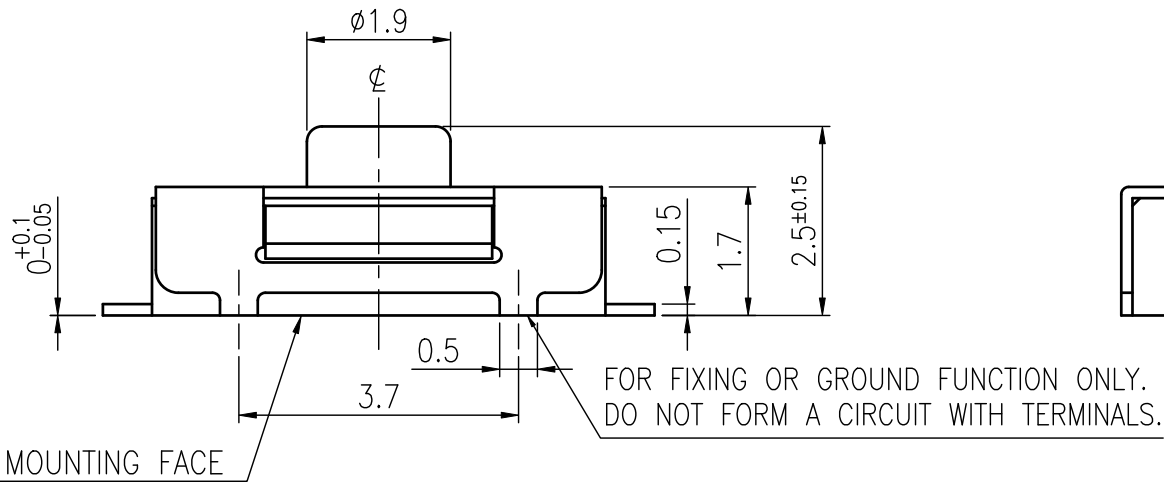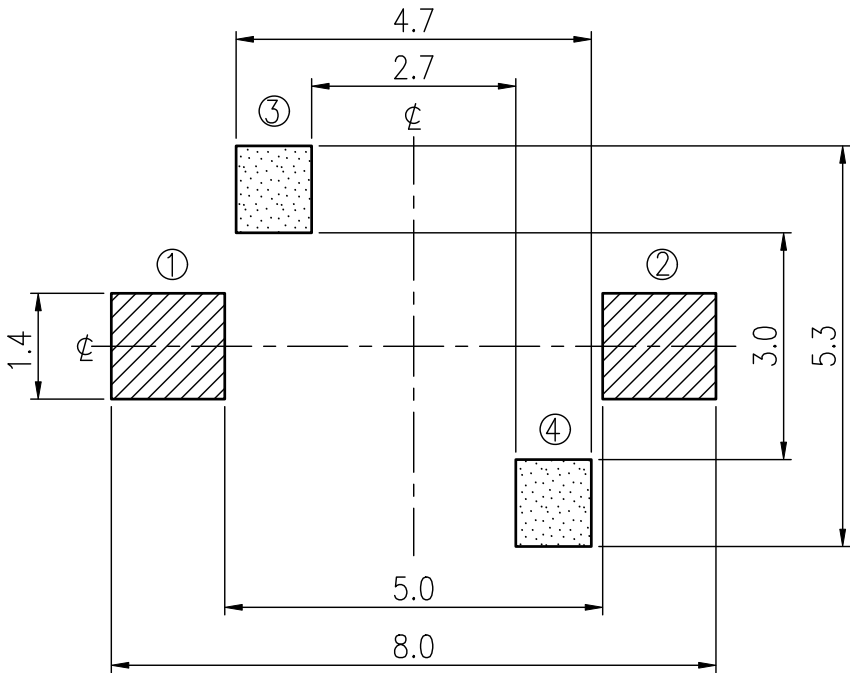

GROUND TERMINAL CAN BE EFFECTIVE EVEN IF NOT SOLDERED.

MODEL NO.	OPERATING FORCE	LIFE CYCLES
NTC019-DT1G-C160T	160±50gf	50,000
NTC019-DT1G-C260T	260±70gf	30,000

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES	DATE	MODEL
			DRAWER Jane Shen	2019.08.22	TITLE TACT SWITCH
			CHECKED Landry Su	2019.08.22	
	UNIT mm	SCALE 10/1	REVIEWED		NO. See Model No.
			APPROVALS Qiuyuan Chuang	2019.08.22	

TAIWAN MISAKI ELECTRONICS CO., LTD.