

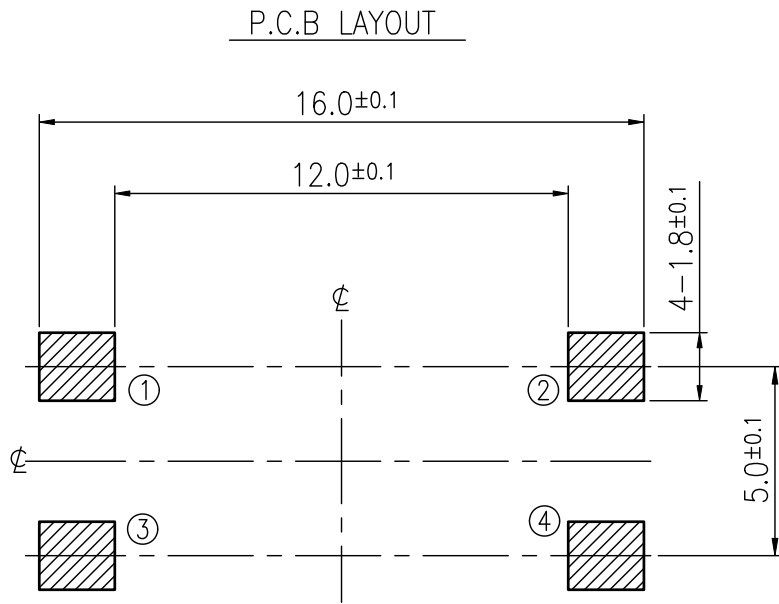
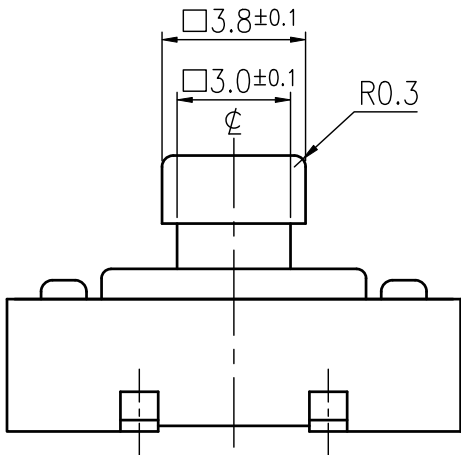
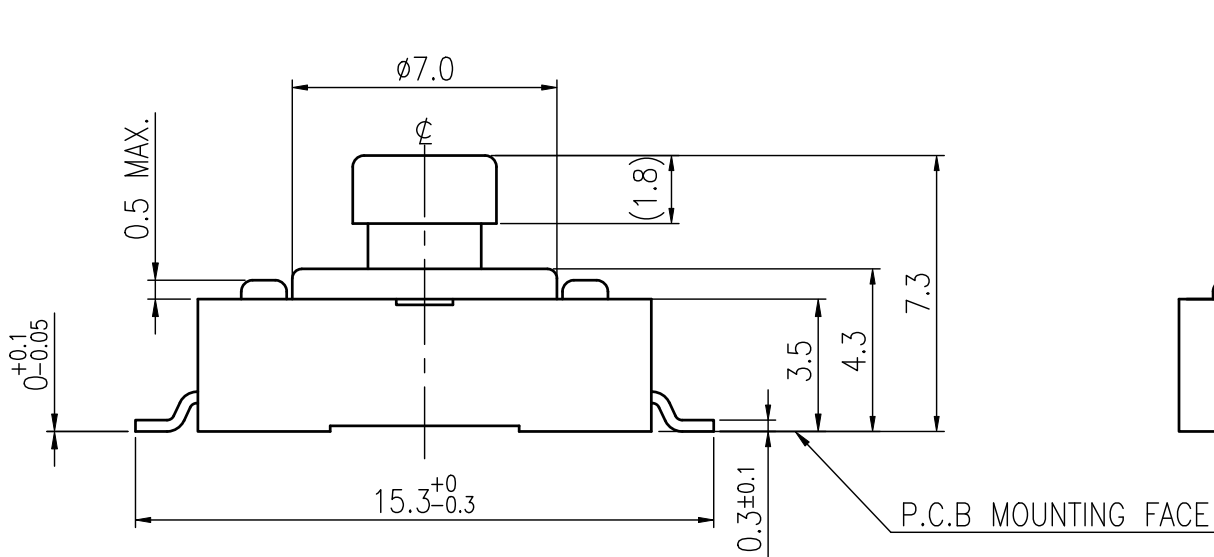



RoHS Compliant

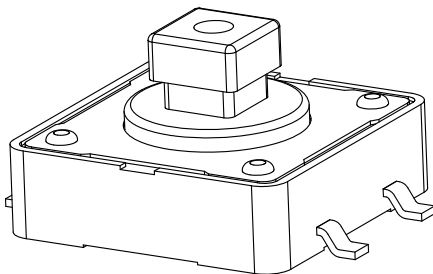


REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2018.10.08	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)			
INSULATION RESISTANCE		DC500V – 100MΩ MIN.		STROKE (ANGLE)		0.3±0.1mm	
WITHSTAND VOLTAGE		AC250V – 1 MINUTE.		LIFE		CYCLES	
REMARKS:							

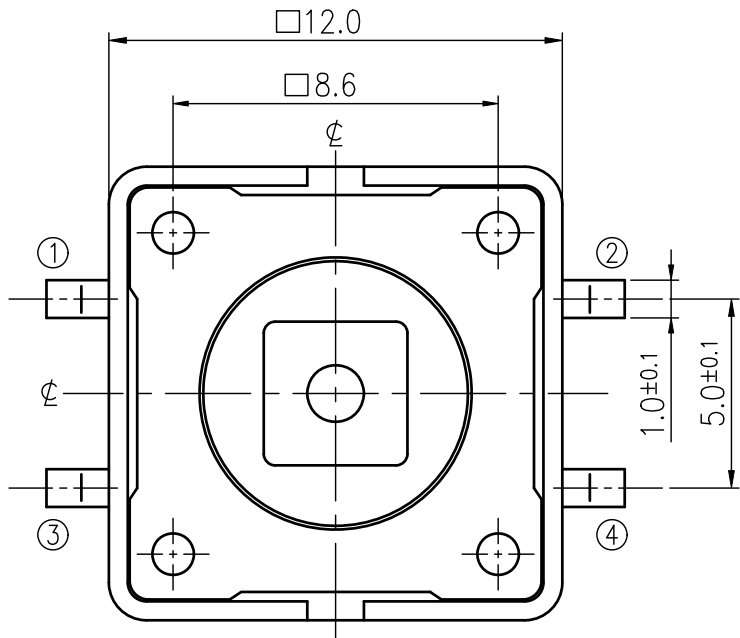

MODEL NO.	OPERATING FORCE	LIFE
NTC045-AB1G-A120T	120±50 gf	1,000,000
NTC045-AB1G-A160T	160±50 gf	500,000
NTC045-AB1G-A260T	260±70 gf	300,000

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen	2018.10.08	TACT SWITCH
			CHECKED			
			REVIEWED	Landry Su	2018.10.08	NO. SEE MODEL NO.
			APPROVALS	Qiuyuan Chuang	2018.10.08	

TAIWAN MISAKI ELECTRONICS CO., LTD.

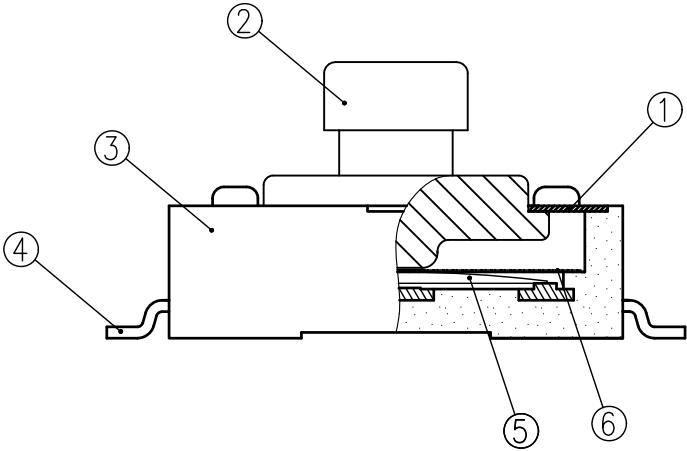

6	MYLAR	1	POLYIMIDE			
5	CONTACT PLATE	1	STAINLESS STEEL PLATE	Ag PLATING		
4	TERMINAL	4	COPPER ALLOY	Ag PLATING OVER Ni PLATING		
3	FRAME	1	POLYHTHALAMIDE	BLACK COLOR		
2	STEM	1	LIQUID CRYSTAL POLYMER	COLOR: ☐ 120/GRAY, ☐ 160/BLACK, ☒ 260/NATURAL		
1	COVER	1	STAINLESS STEEL PLATE			
NO.	PART NAME	Q'TY	MATERIAL	SPECIFICATION		
				SIGNATURES	DATE	M O D E L
				DRAWN Jane Shen	2018.10.08	TITLE TACT SWITCH
				CHK'D		
				REV'D Sandry Pu	2018.10.08	NO. NTC045-AB1G-A260T
				APP'D Qiuyuan Chuang	2018.10.08	
SYM	DESCRIPTION	DATE	APPROVED	DWG NO. NTC045-002		
TAIWAN MISAKI ELECTRONICS CO.,LTD.						