
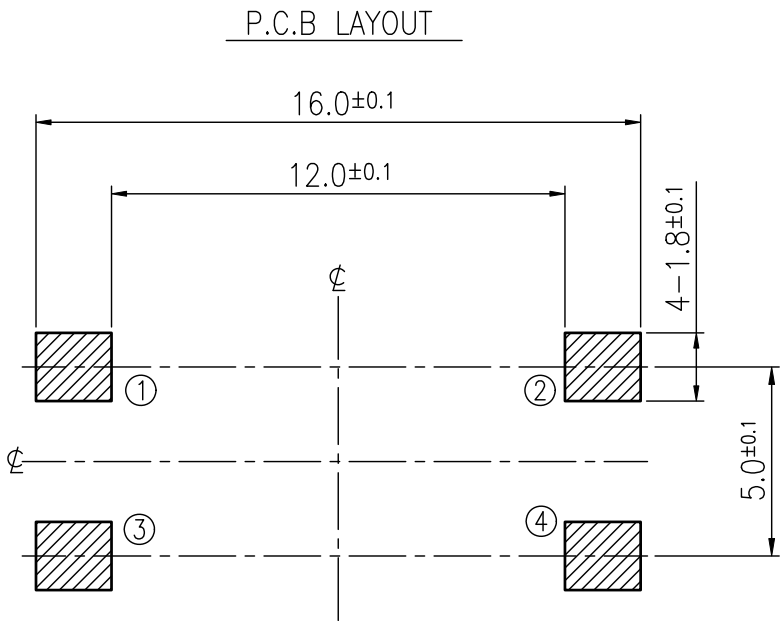
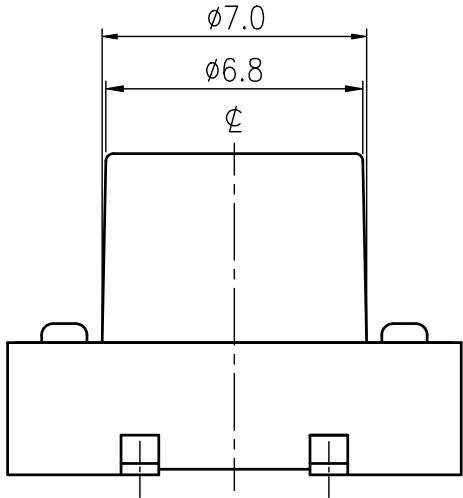
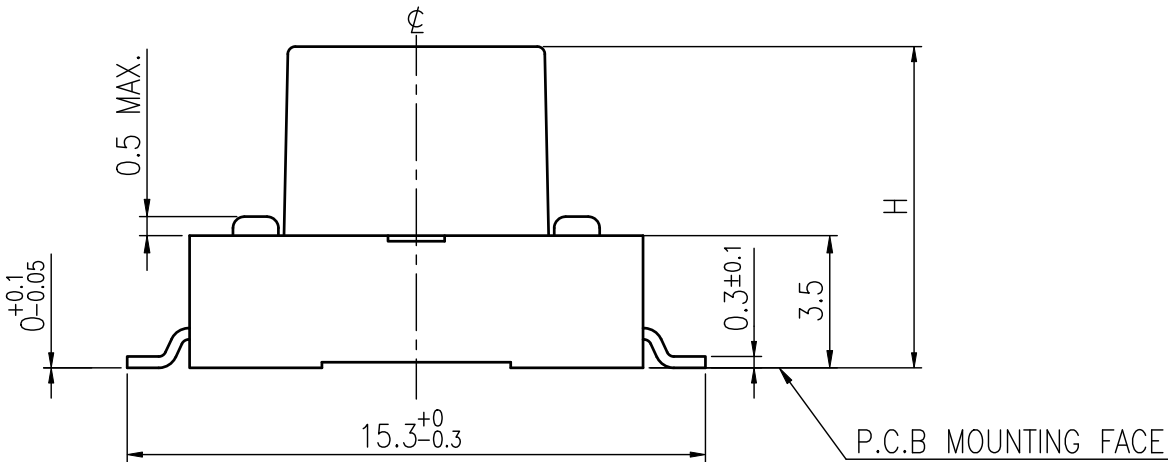

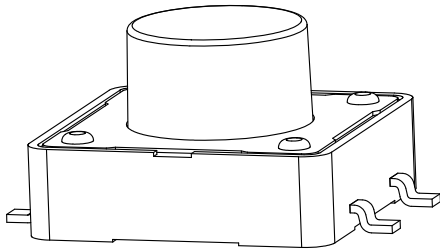


RoHS Compliant

For Reference Only

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2018.10.08	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)			
INSULATION RESISTANCE		DC500V - 100MΩ MIN.		STROKE (ANGLE)		0.3±0.1mm	
WITHSTAND VOLTAGE		AC250V - 1 MINUTE.		LIFE		2Ω MAX.	
REMARKS:							

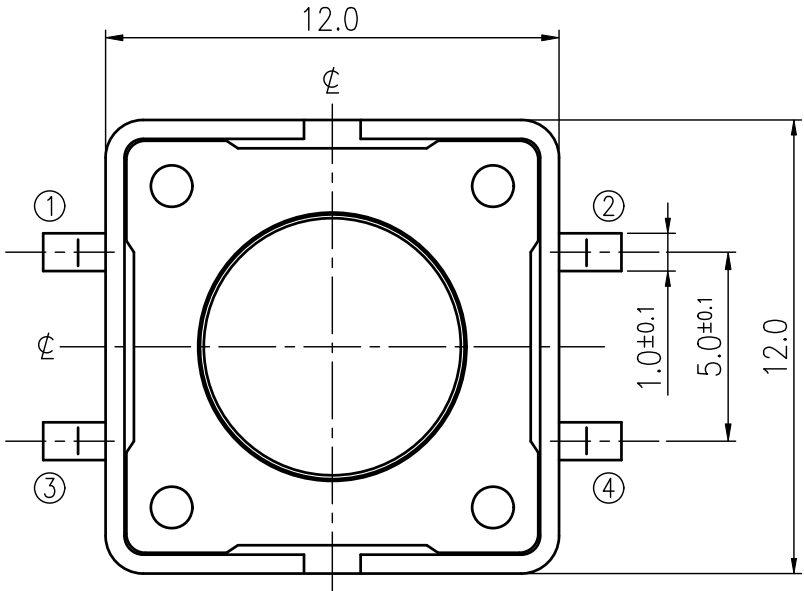

MODEL NO.	H	OPERATING FORCE	LIFE
NTC045-AB1G-B120T	4.3	120±50 gf	1,000,000
NTC045-AB1G-B160T		160±50 gf	500,000
NTC045-AB1G-B260T		260±70 gf	300,000
NTC045-AB1G-C120T	8.5	120±50 gf	1,000,000
NTC045-AB1G-C160T		160±50 gf	500,000
NTC045-AB1G-C260T		260±70 gf	300,000
NTC045-AB1G-G120T	7.3	120±50 gf	1,000,000
NTC045-AB1G-G160T		160±50 gf	500,000
NTC045-AB1G-G260T		260±70 gf	300,000

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES	DATE	MODEL
			DRAWER Jane Shen	2018.10.08	TACT SWITCH
			CHECKED		
			REVIEWED		NO. SEE MODEL NO.
			APPROVALS Dennis Hung	2018.10.08	

TAIWAN MISAKI ELECTRONICS CO., LTD.