
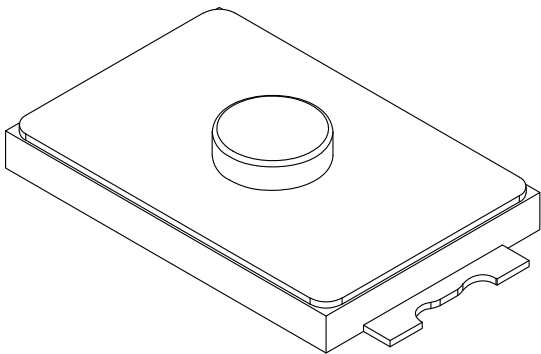





RoHS Compliant

For Reference Only



REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2019.05.24	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC12V 50mA		TIMING			
CONTACT RESISTANCE		500mΩ MAX.		OPERATION (TORQUE)		160±50gf	
INSULATION RESISTANCE		DC100V-100MΩ MIN.		STROKE (ANGLE)		0.15±0.1mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE		LIFE		300,000 CYCLES	
REMARKS:							

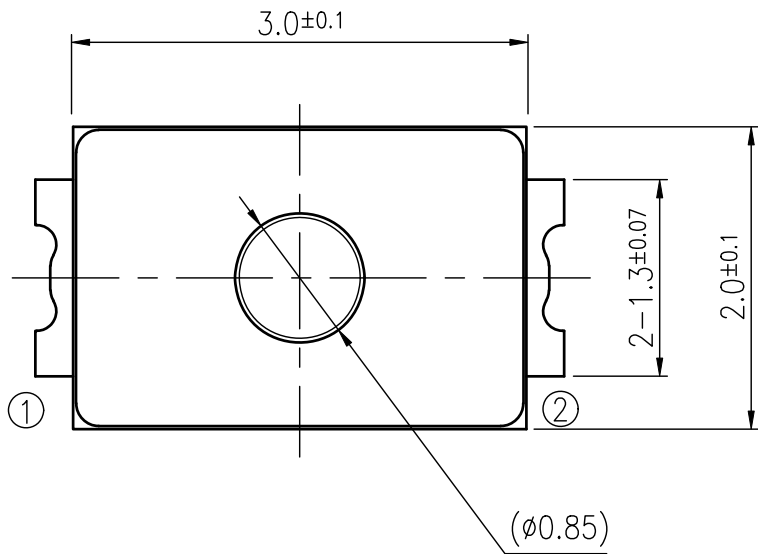

SCHEMATIC

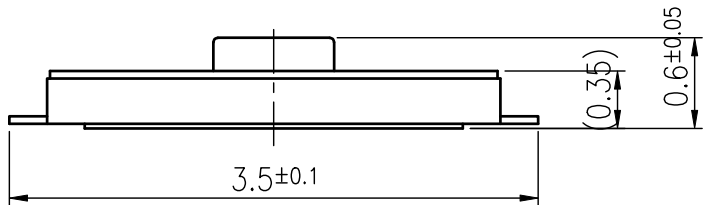

P.C.B. LAYOUT

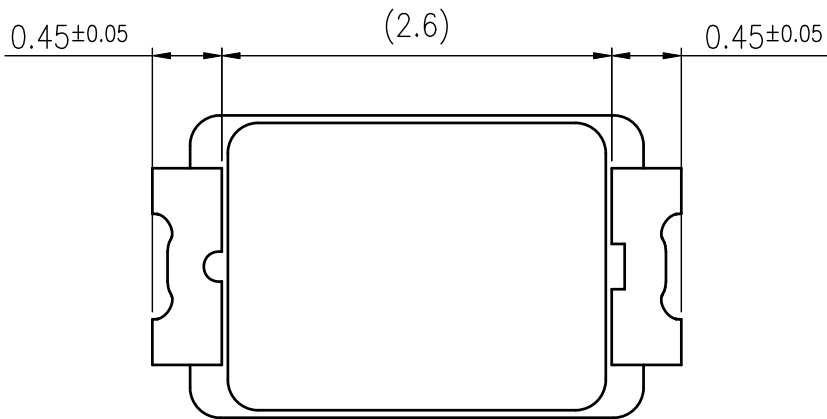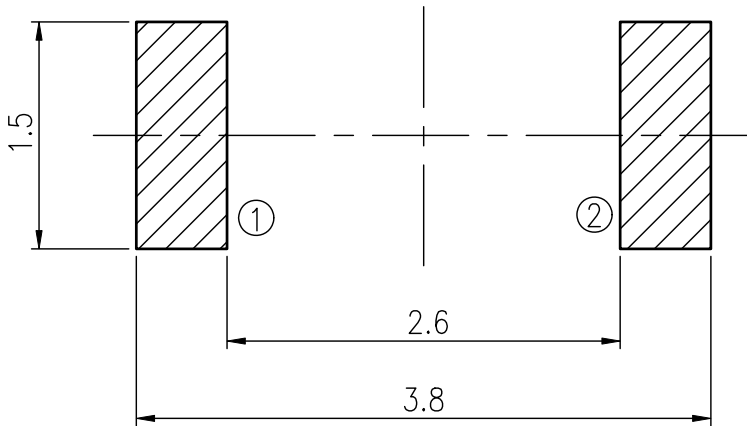

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1	SIGNATURES		DATE	MODEL
	DRAWER	Jane Shen	2019.05.24	TITLE TACT SWITCH
	CHECKED			
	UNIT	SCALE	REVIEWED	NO. NTC200-3020-A160T
	mm	20/1	APPROVALS Qiuyuan Chuang	
			2019.05.24	

TAIWAN MISAKI ELECTRONICS CO., LTD.