

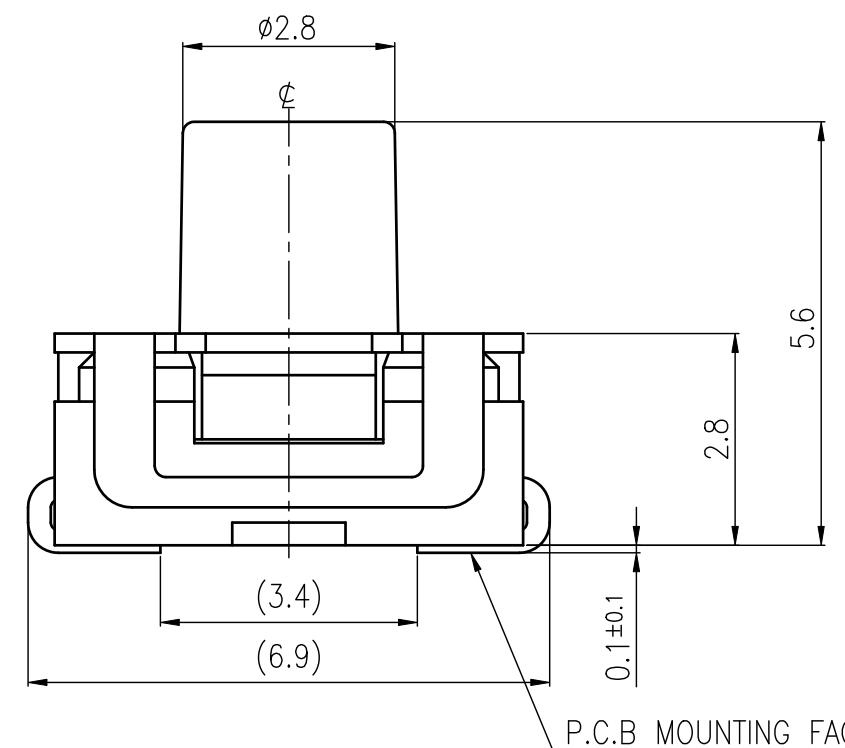


RoHS Compliant

For Reference Only

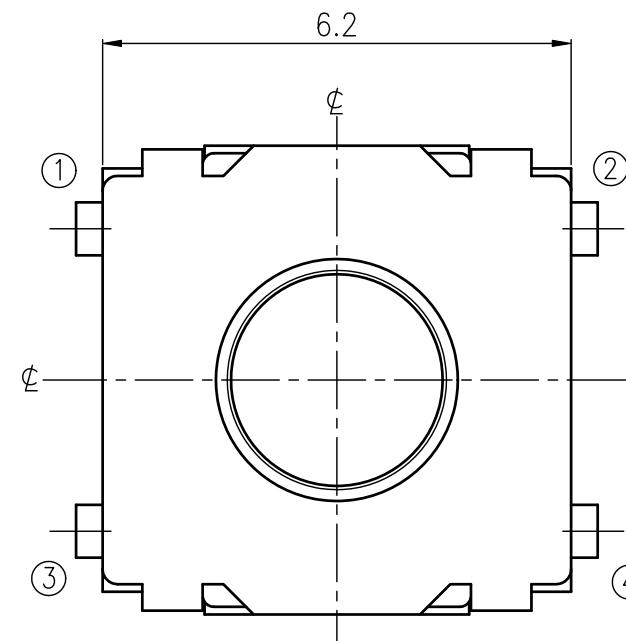


P.C.B MOUNTING FACE

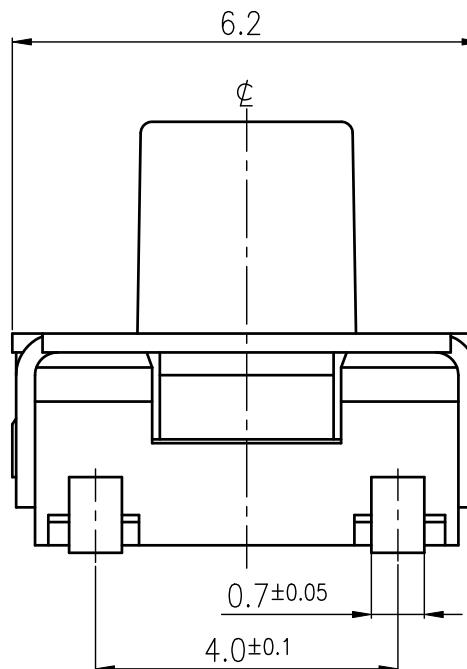


TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.2			SIGNATURES		DATE	MODEL
			DRAWER	Jane Shen		
CHECKED						
	UNIT mm	SCALE 10/1	REVIEWED			
			APPROVALS	Dennis Hung	2017.09.14	NO. NTC202-CC1U-C200T

TAIWAN MISAKI ELECTRONICS CO., LTD.

SCHEMATIC

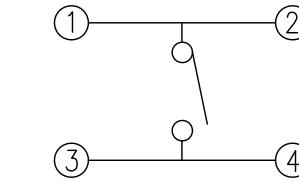

RECOMMENDED P.C.B LAYOUT

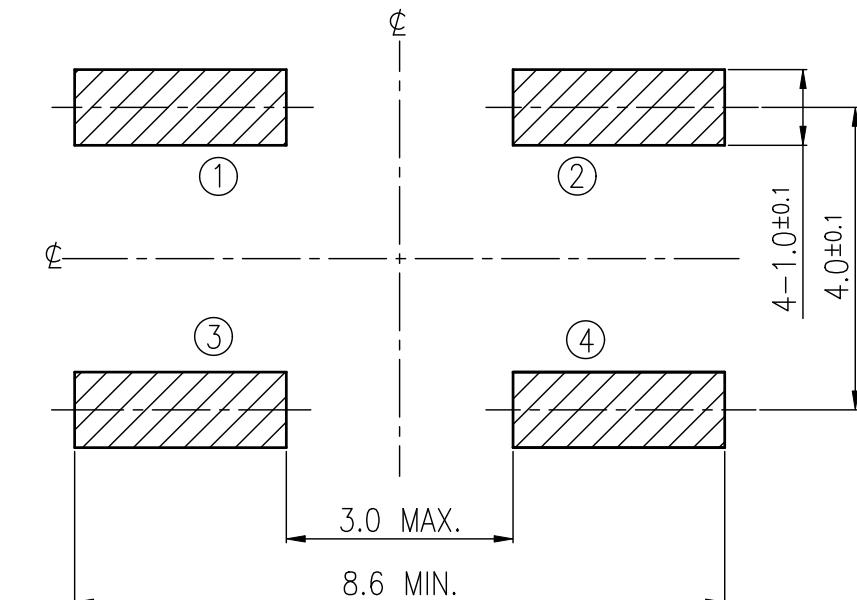


HATCHED AREA SHOWS SOLDERING LAND

THE PACKING SPECIFICATIONS


RoHS Compliant

1. STRUCTURE AND MATERIALS

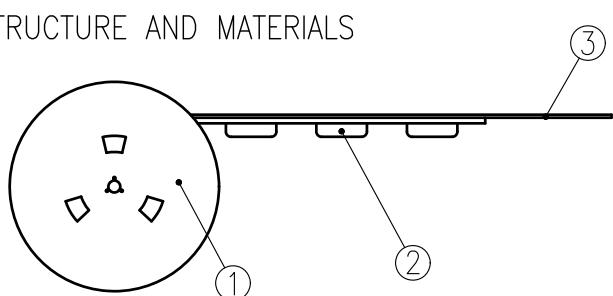

NO.	PARTS NAME	MATERIALS
③	COVER TAPE	POLYESTER
②	CARRIER TAPE	POLYSTYRENE
①	REEL	POLYSTYRENE

- PACKAGING QUANTITY : 1,000 PCS/REEL
- MORE THAN 10 EMPTY POCKETS SHOULD BE REMAINED AT BOTH ENDS OF THE CARRIER TAPE FOR EACH REEL.
- SHORTAGE LESS THAN 10 PCS A REEL IS ACCEPTABLE BUT MORE THAN 3 RUNNING POCKETS SHORTAGE IS NOT ALLOWED.
- STRIPPING STRENGTH OF COVER TAPE IS BETWEEN 10 gf TO 130 gf AND STRIPPING ANGLE SHOULD BE WITHIN $165^\circ \sim 180^\circ$.
- THE PRODUCT IN THE POCKET OF CARRIER TAPE SHOULD BE PLACED IN A SPECIFIED CORRECT POSITION.
- TAPE AND REEL PER EIA-481.
- DIMENSIONS :

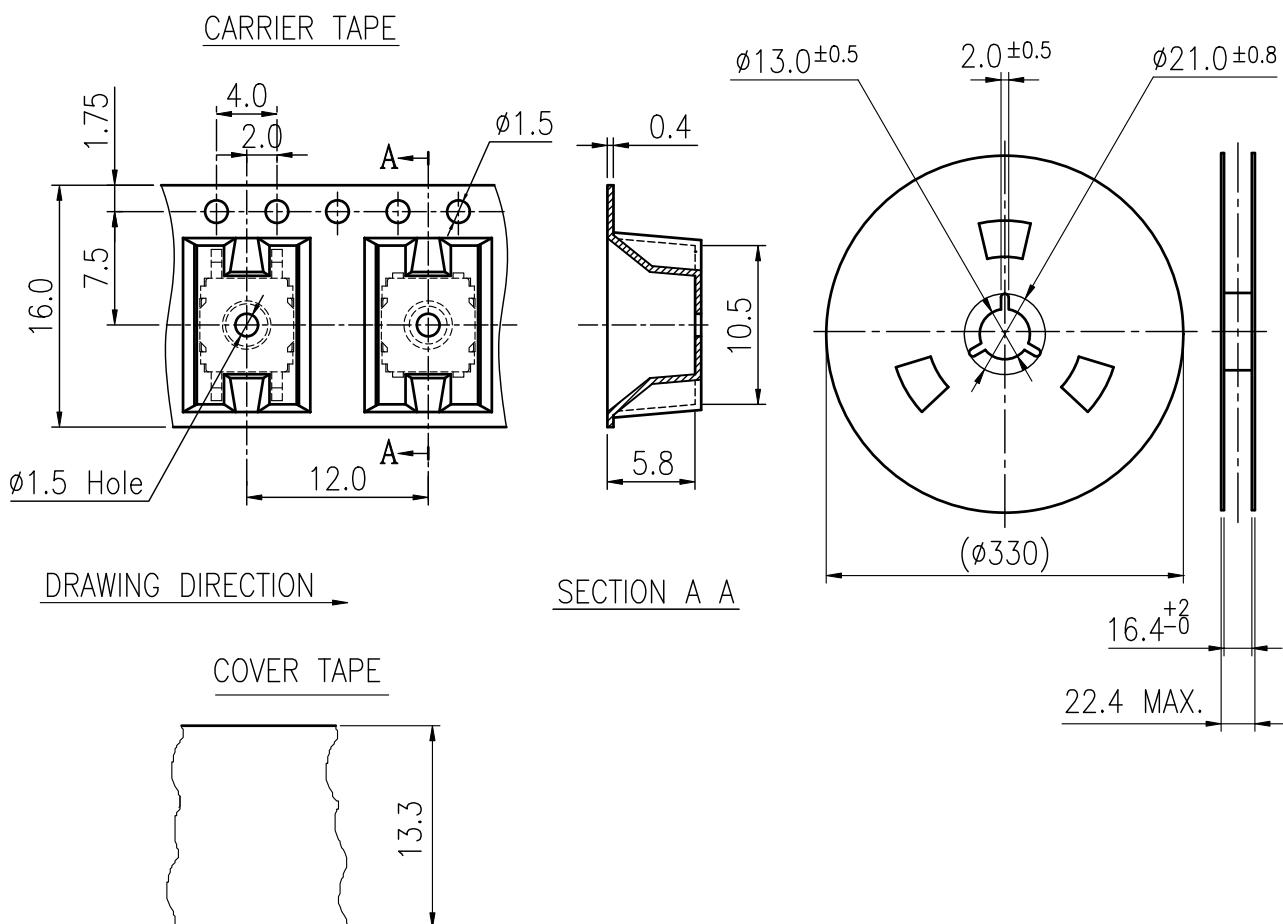

SYM	DISCRIPTION	DATE	APPROVED	APPROVED BY	REVIEWED BY	CHECKED BY	DESIGNED BY	MODEL NO.
				Dennis Hung			Jane Shen	NTC_202-CC_(G,U)-C
							2017.10.20	PAGINATE. 1/1
								SPEC NO. P-822