
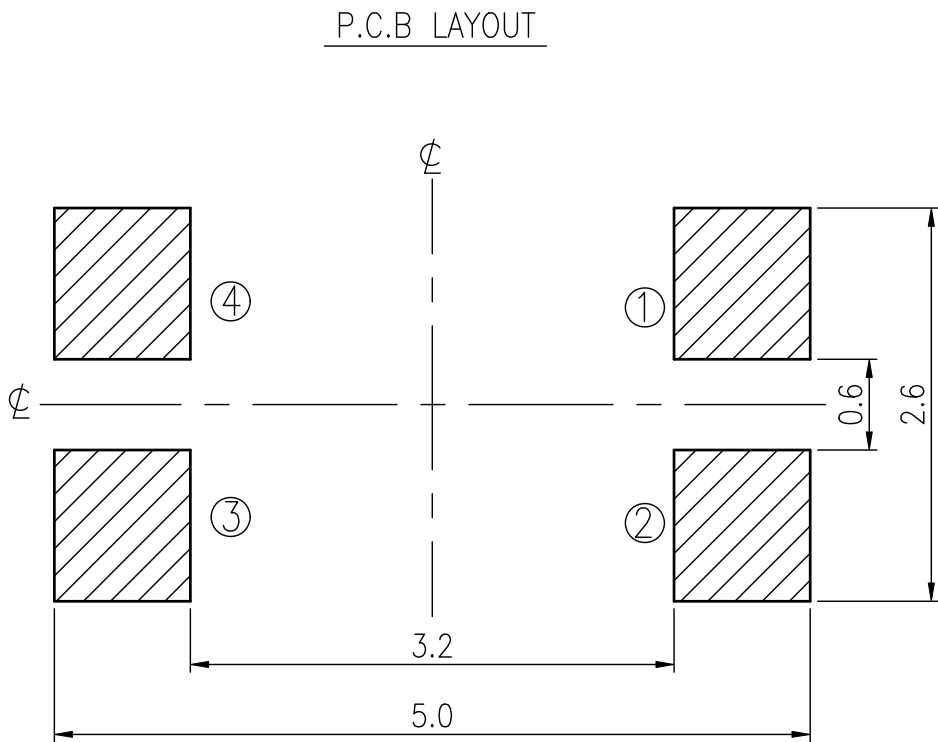

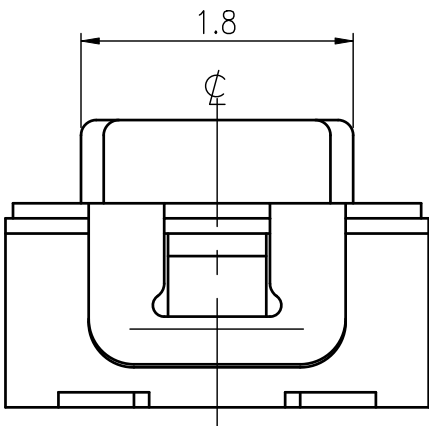
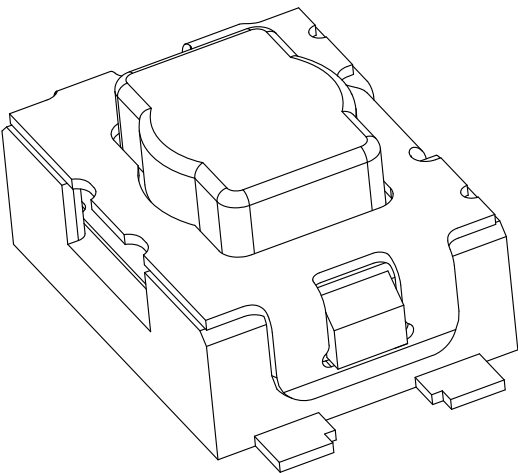
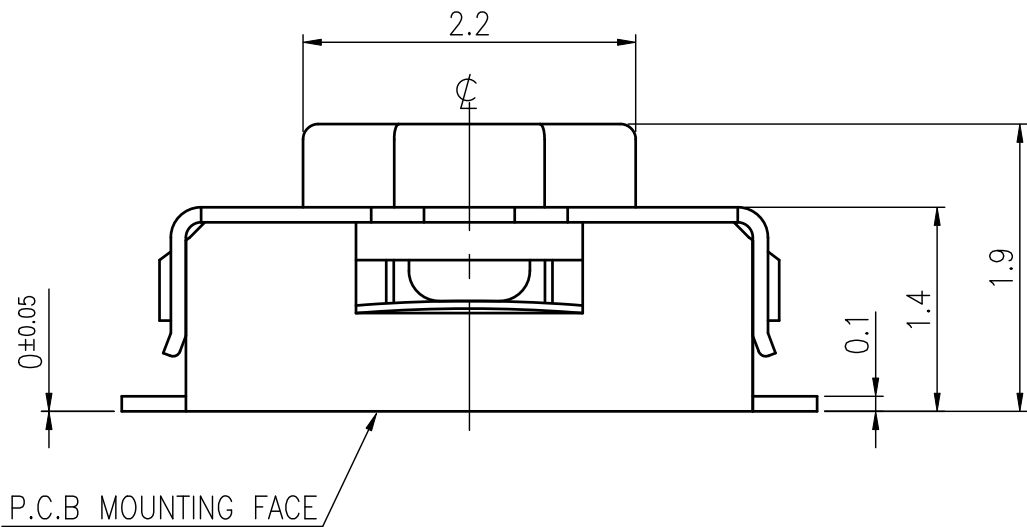


RoHS Compliant

For Reference Only

REVISIONS							
Rev	DESCRIPTION	DATE	DRAWER	Rev	DESCRIPTION	DATE	DRAWER
A	Initial Drawing	2017.02.16	Jane Shen	C			
B				D			
SPECIFICATIONS							
RATING		DC32V 50mA		TIMING			
CONTACT RESISTANCE		100mΩ MAX.		OPERATION (TORQUE)		300±75 gf	
INSULATION RESISTANCE		DC500V-1000MΩ MIN.		STROKE (ANGLE)		0.25±0.1 mm	
WITHSTAND VOLTAGE		AC250V-1 MINUTE		LIFE		150,000 Cycles	
REMARKS:							

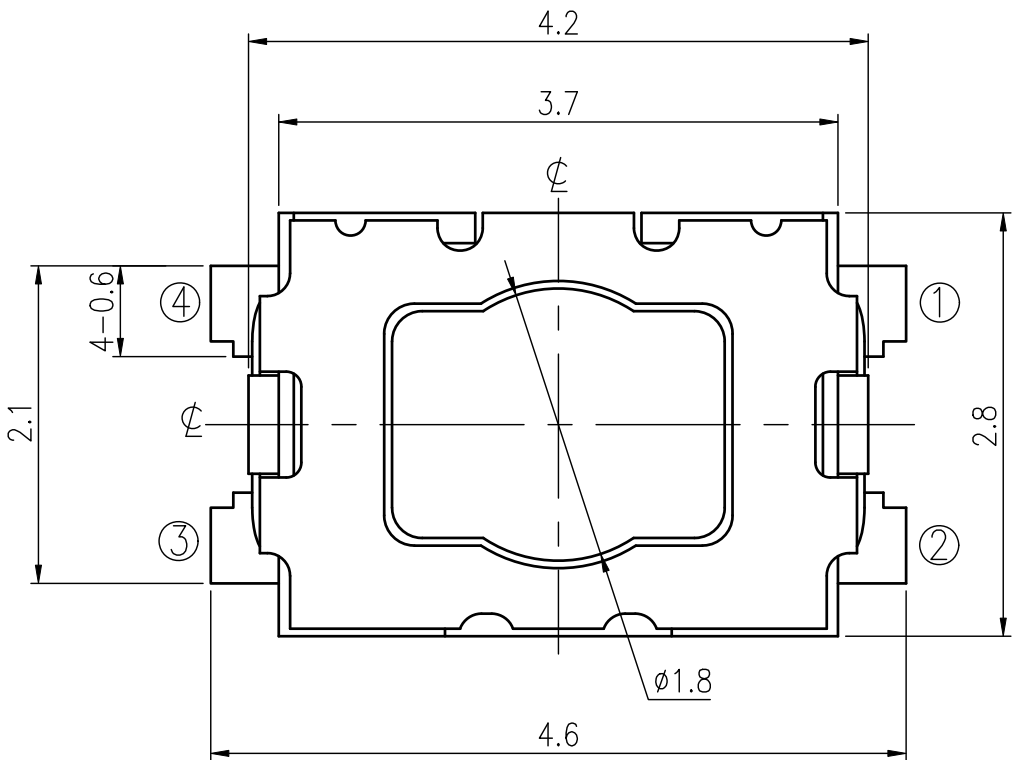

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1			SIGNATURES		DATE	MODEL	
			DRAWER Jane Shen		2017.02.16	TITLE TACT SWITCH	
			CHECKED				
	UNIT mm	SCALE 20/1	REVIEWED			NO. NTC228-AA1G-A300T	
			APPROVALS <i>Dennis Hung</i>		2017.02.16		
TAIWAN MISAKI ELECTRONICS CO., LTD.							