


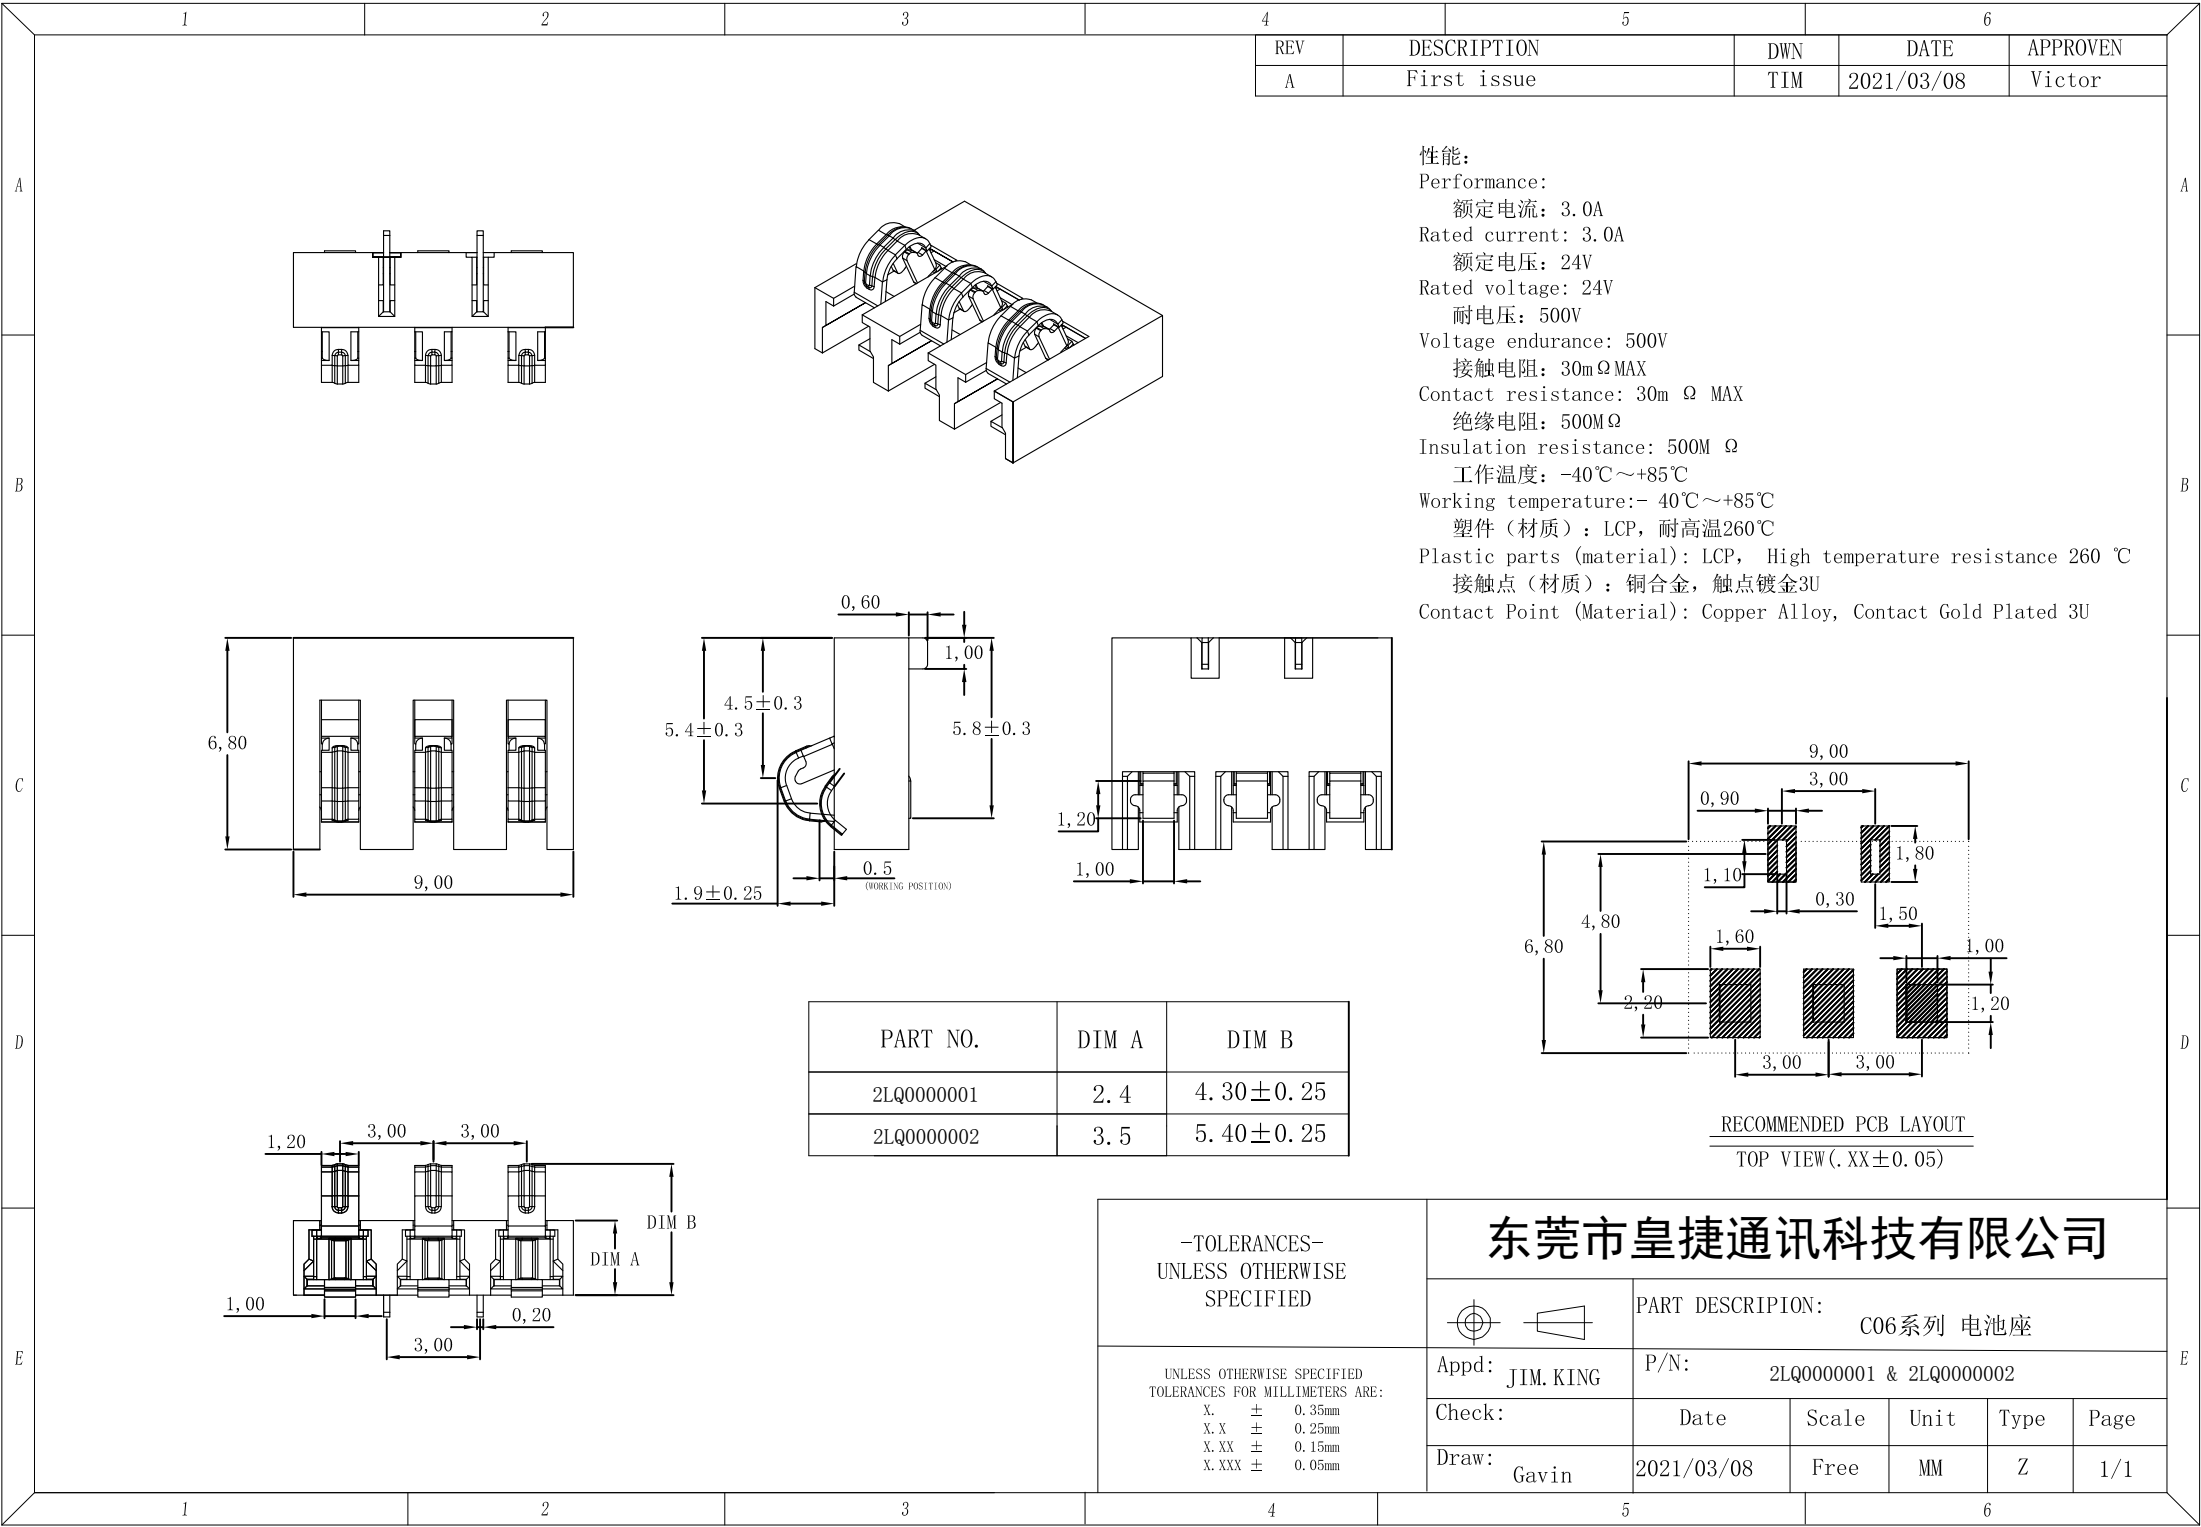

性能:

Performance:

额定电流: 3.0A

Rated current: 3.0A

额定电压: 24V

Rated voltage: 24V

耐电压: 500V

Voltage endurance: 500V

接触电阻: 30mΩ MAX

Contact resistance: 30m Ω MAX

绝缘电阻: 500MΩ

Insulation resistance: 500M Ω

工作温度: -40℃~+85℃

Working temperature:- 40℃~+85℃


塑件(材质): LCP, 耐高温260℃

Plastic parts (material): LCP, High temperature resistance 260 ℃

接触点(材质): 铜合金, 触点镀金3U

Contact Point (Material): Copper Alloy, Contact Gold Plated 3U

PART NO.	DIM A	DIM B
2LQ0000001	2.4	4.30±0.25
2LQ0000002	3.5	5.40±0.25

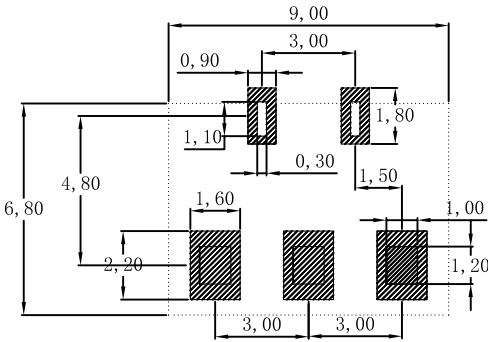

RECOMMENDED PCB LAYOUT

TOP VIEW(.XX±0.05)

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:

X. ± 0.35mm
X.X ± 0.25mm
X.XX ± 0.15mm
X.XXX ± 0.05mm

东莞市皇捷通讯科技有限公司



PART DESCRIPTION:

C06系列 电池座

Appd: JIM. KING

P/N: 2LQ0000001 & 2LQ0000002

Check:

Date

Scale

Unit

Type

Page

Draw:

Gavin

2021/03/08

Free

MM

Z

1/1