
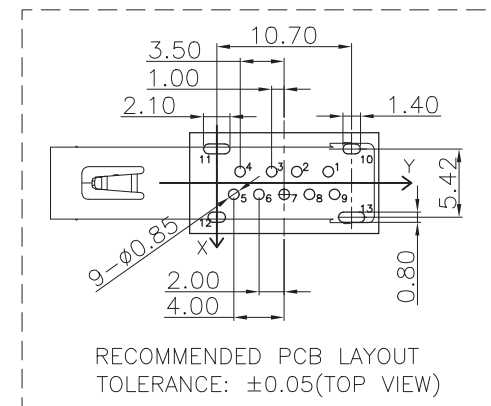
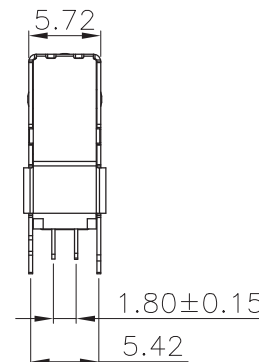
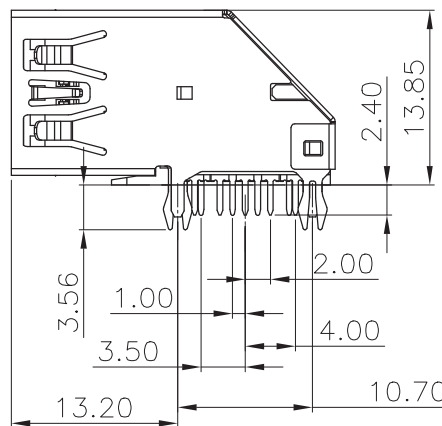
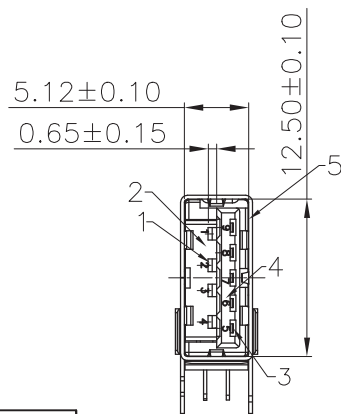
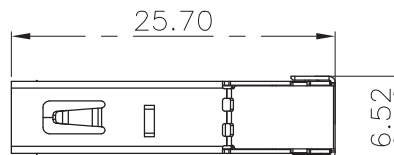


RoHS2.0+REACH



SPECIFICATIONS:

Contact current Rating:

1.8 Amperes for pin1&pin4.

0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)

Insulation resistance:100Megohms Minimum.

Contact Resistance:

30mΩ Max for pin1&pin4

50mΩMax for other contacts

Mechanical Characteristics:

Mating Force:35 Newtoms.Maximum

Unmating Force:10 Newtoms.Mlimum.

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSRT+

ITEM	PART NAME	Material	Q'TY	REMARK
1	4P Semi-	Housing LCP	1	Black &Blue UL94V-0
2	manufactured Goods	Contact COPPER ALLOY	4	T=0.25 Plating Gild/Tin
3	5P Semi-	Housing LCP	1	Black &Blue UL94V-0
4	manufactured Goods	Contact COPPER ALLOY	5	T=0.25 Plating Gild/Tin
5	Shell	Stainless Steel	1	T=0.3

5.0							
4.0							
3.0							
2.0							
1.0							
NO.	DATE	DESCRIPTION	DRAWING				

DRAWING:	GENERAL TOLERANCE	
Frank	.X:=±0.30 .X':=±2°	
	.XX:=±0.25 .XX':=±1°	
	.XXX:=±0.15 .XXX':=±0.5°	
CHECKED:	UNIT: MM	PROJECTION:
yangjie		
APPROVAL:	SCALE: 1:1	
	SHEET: 1/1	

CHIN-BAN Electronic Technology	
DESCRIPTION: USB3.0 AF侧插小鱼叉脚无边	
PART NO: USB30-AF-005	REV: 1.0
OLD CODE:	
DRAWING NO:	SIZE: A4