


## SPECIFICATIONS

Current Rating: 0.75 Amps  
 Withstanding Voltage: AC 500V  
 Insulation Resistance: 1000MΩ Min  
 Contact Resistance: 20mΩ Max  
 Operation Temperature: -40° to +105°  
 Insulator Material: Polyester (UL94V-0)  
 Contact Material: Brass  
 Standard: PA6T  
 Contact Plating: Gold Flash  
 Max. Processing Temp: 240° C for 30-60 seconds  
 (260° C for 5 seconds)

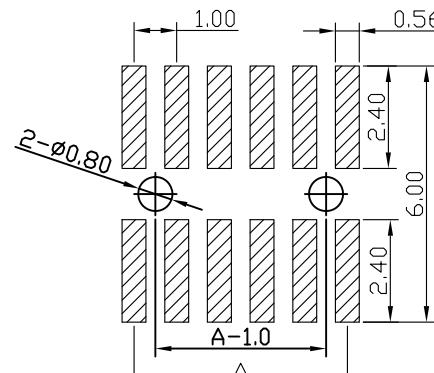

深圳市韩下电子有限公司

UNLESS OTHERWISE  
SPECIFIED TOLERANCE

$X: \pm 0.30$   $X^\circ: \pm 5^\circ$   
 $X, X: \pm 0.25$   $X, X^\circ: \pm 1^\circ$   
 $X, XX: \pm 0.20$   $X, XX^\circ: \pm 0.5^\circ$

DRAWN NAME

HX PZ1.0-2x8P TP-D

SIZE	A4	SCALE	N:1	PROUT NO.		PAGE	1/1
REV	A	UNIT	mm	PROJECT	①		

DRAWN:	黄彬	CHECKED:	张伟	APPROVED:	罗小春
DATE:	2024/01/22	DATE:	2024/01/22	DATE:	2024/01/22

No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B
1	0.00	1.00	11	10.00	11.00	21	20.00	21.00	31	30.00	31.00
2	1.00	2.00	12	11.00	12.00	22	21.00	22.00	32	31.00	32.00
3	2.00	3.00	13	12.00	13.00	23	22.00	23.00	33	32.00	33.00
4	3.00	4.00	14	13.00	14.00	24	23.00	24.00	34	33.00	34.00
5	4.00	5.00	15	14.00	15.00	25	24.00	25.00	35	34.00	35.00
6	5.00	6.00	16	15.00	16.00	26	25.00	26.00	36	35.00	36.00
7	6.00	7.00	17	16.00	17.00	27	26.00	27.00	37	36.00	37.00
8	7.00	8.00	18	17.00	18.00	28	27.00	28.00	38	37.00	38.00
9	8.00	9.00	19	18.00	19.00	29	28.00	29.00	39	38.00	39.00
10	9.00	10.00	20	19.00	20.00	30	29.00	30.00	50	49.00	50.00