
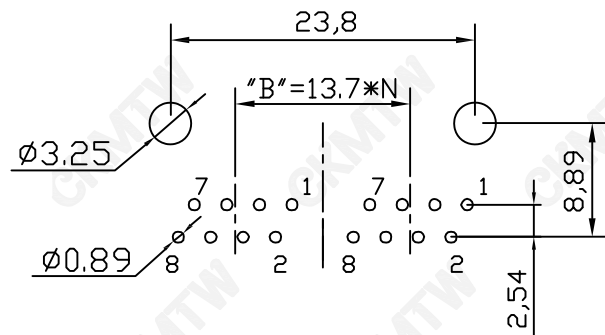
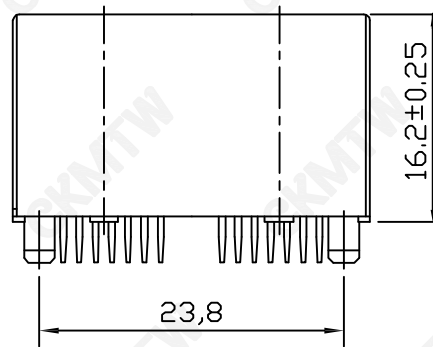
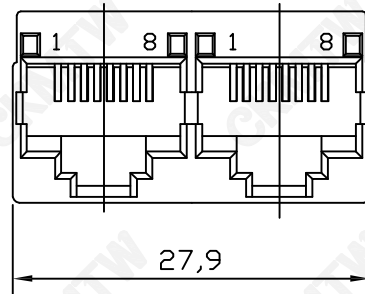


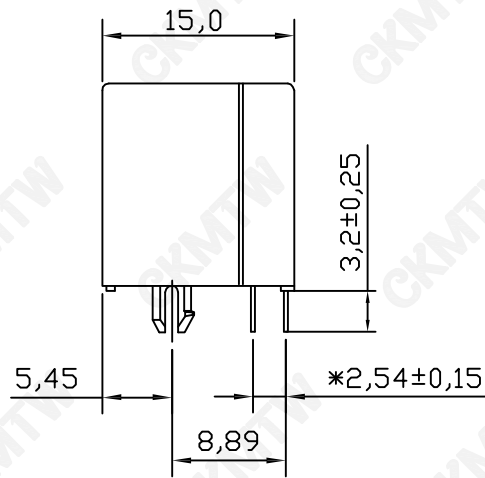

PC Board Layout
Component Side Shown

NOTES:

MATERIAL :

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
2.CONTACT MATERIAL :PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3.PLATING :GOLD PLATING OVER NICKEL.

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
2.CURRENT RATING :1.5 AMP.
3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- 1.DURRABILITY :750 CYCLES MIN.
2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40℃~+85℃
2. OPERATION : -25℃~+85℃

TOLERANCE TABLE	
	±0.30
.00	±0.20
.000	±0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD			
CHECKED:	DATE:	TITLE: RJ45-8P/8C 52E-1*2 双胞胎 直插 全塑 黑色			
DRAWN: ZYJ	DATE: 2017-03-18	PART. NO.	R-RJ45S08P-A200		
		UNIT	mm	SCALE	free
		FILE NO.	Ckmtw-RJ45-0203	REV.	A
					HY04