


## SPECIFICATIONS

Current Rating: 1.0 Amps  
 Withstanding Voltage: AC 500V  
 Insulation Resistance: 1000MΩ Min  
 Contact Resistance: 20mΩ Max  
 Operation Temperature: -40° to +105°  
 Insulator Material: Polyester (UL94V-0)  
 Contact Material: Phosphor bronze  
 Standard: PA6T  
 Contact Plating: Gold Flash  
 Max. Processing Temp: 240° C for 30–60 seconds  
 (260° C for 5 seconds)

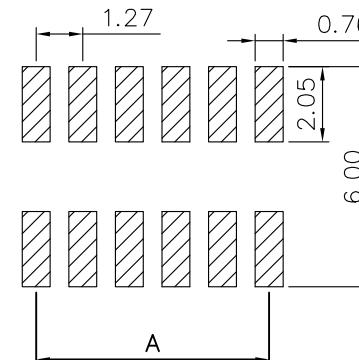

## RECOMMEND P.C.B LAYOUT

PCB TOLERANCE: ± 0.05 (TOP VIEW)



深圳市韩下电子有限公司

UNLESS OTHERWISE  
SPECIFIED TOLERANCE

X : ± 0.30 X° : ± 5°  
X.X : ± 0.25 X.X° : ± 1°  
X.XX : ± 0.20 X.XX° : ± 0.5°

DRAWN NAME

HX PM1.27-2x6P TP

SIZE	A4	SCALE	N:1	PROUT NO.												
REV	A	UNIT	mm	PROJECT	●	●	PAGE	1/1								
DRAWN :	黄彬	CHECKED:	张伟	APPROVED:	罗小春											
DATE:	2022/08/02	DATE:	2022/08/02	DATE:	2022/08/02											