

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.27	阿树

规格 Specifications:
额定电压 Voltage rating:250VAC/DC。
额定电流 Current rating:0.75A AC/DC
耐电压 Withstanding voltage:300V AC/minute
温度区间 Temperature range:-40℃to+105℃
绝缘电阻 Insulation resistance:≥500MΩ Min
接触电阻 Contact resistance:≤20MΩ Max
材料 Material: PA6T UL94V-0
镀层 Planting Category: 1U"Gold
回流焊温度 Reflow soldering temperature:260±5℃,10s

PART NO.:

X3021 F V-2xXX-C20 D20
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:F-Female
③Welding Board Angle:V-Stright 180°
④Row No.Pin No:2xXX-2x03P-2x50P
⑤Plastic height: C=2.0mm
⑥Plastic length:D=2.0mm

X3021FV-2xXX-C20D20	PA6T UL94V-0	Phosphor Bronze	1U"Gold	X3021W
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XK Wafer

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN
CHECKED
APPROVED


阿树
UNIT: mm/in
SIZE: A4

VIEW:
MODEL TYPE:
PART NO.:
DWG NO.:

1.00mm Crimp Sty
Connector
X3021FV-2xXX-C20D20

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

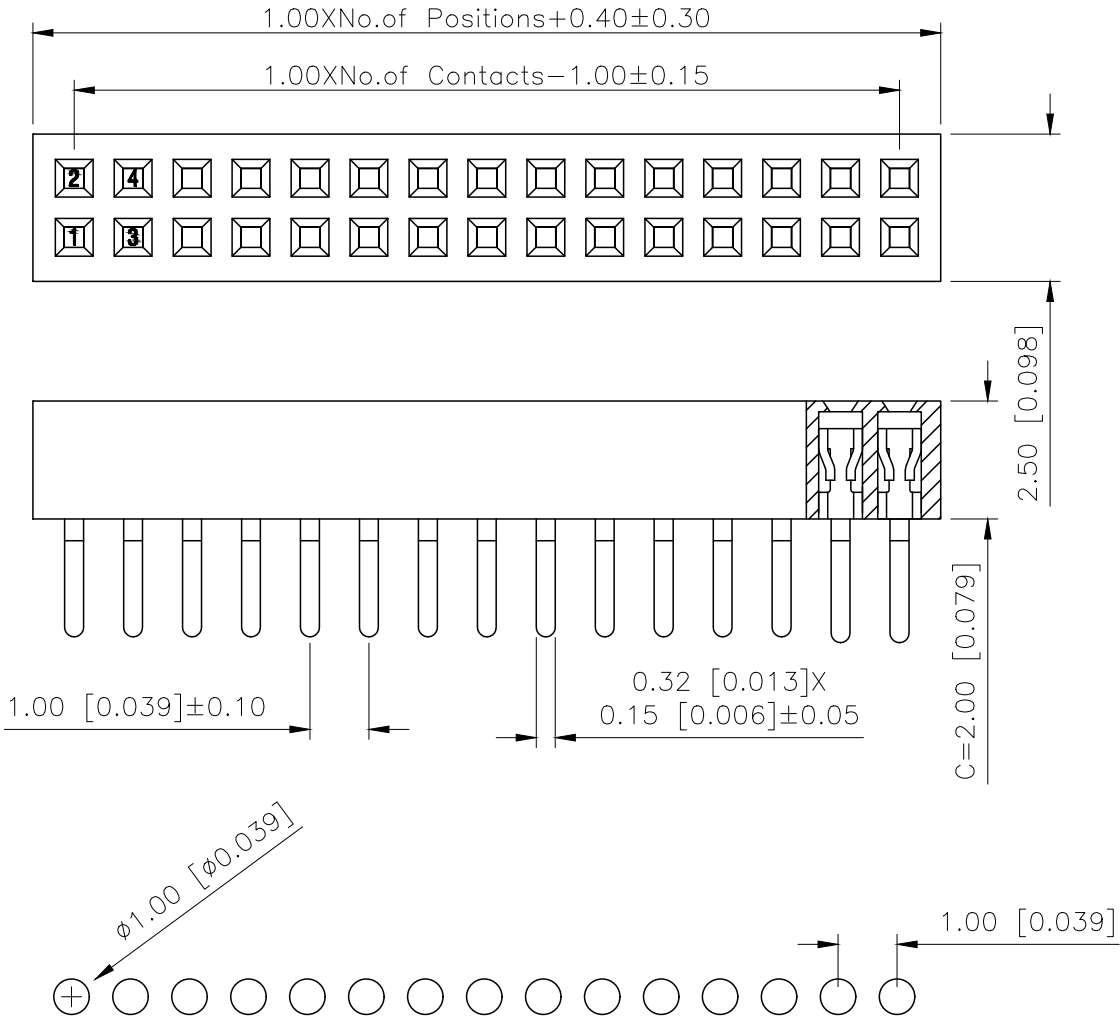

PCB LAYOUT