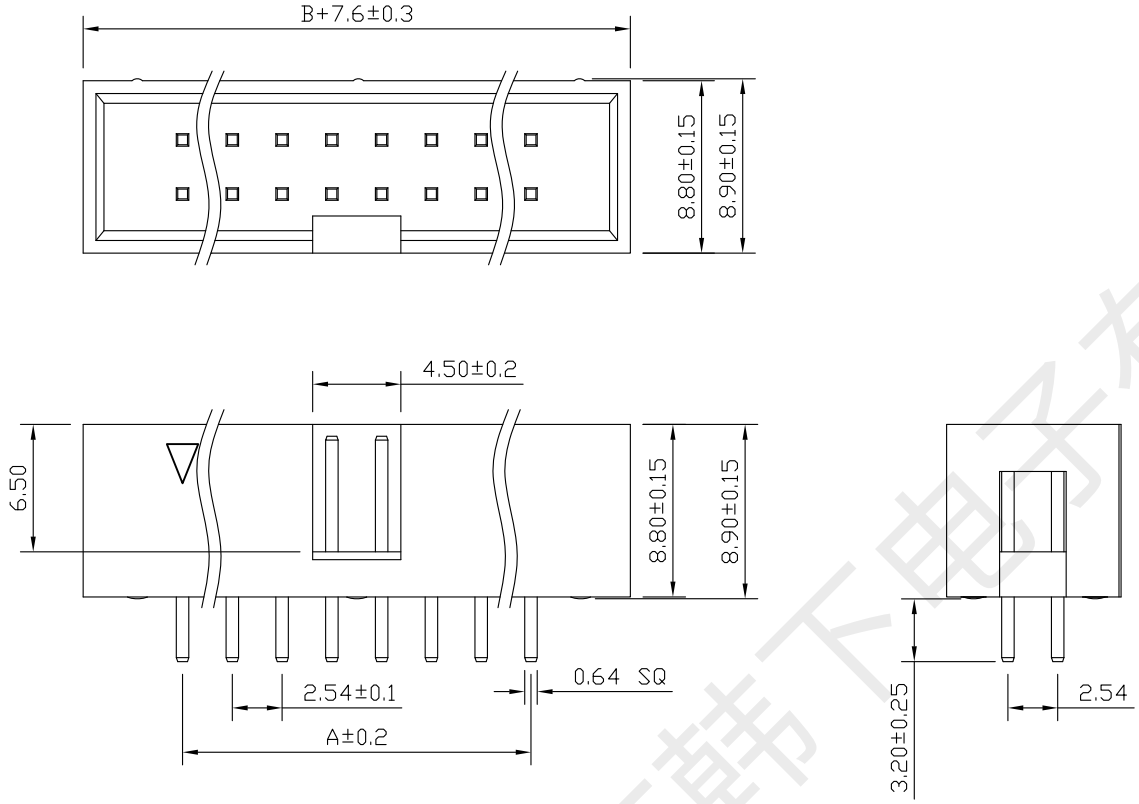

SPECIFICATIONS

Current Rating:	3Amps
Insulation Resistance:	1000MΩ Min
Contact Resistance:	20mΩ Max
Withstanding Voltage:	AC 1000V
Operation Temperature:	-40° to+105°
Contact Material:	Brass
Insrlator Material:	Polyester(UL 94V-0)
Contact plating:	Gold Flash
Standard:	PA6T
Max.Processing Temp:	240° C for30-60seconds (260° C for10seconds)

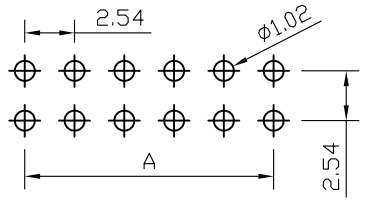

RECOMMEND P.C.B LAYOUT

PCB TOLERANCE:±0.05 (TOP VIEW)

深圳市韩下电子有限公司

No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B
6	5.08	7.62	22	25.40	27.94	36	43.18	45.72
8	7.62	10.16	24	27.94	30.48	40	48.26	50.80
10	10.16	12.70	26	30.48	33.02	44	53.34	55.88
12	12.70	15.24	28	33.02	35.56	50	60.96	63.50
14	15.24	17.78	30	35.56	38.10	60	73.66	76.20
16	17.78	20.32	32	38.10	40.64	64	78.74	81.28
18	20.32	22.86	34	40.64	43.18			

韩下 HANXIA® 深圳市韩下电子有限公司

UNLESS OTHEWIXE SPECIFIED TOLERANCE
X :±0.30 X° :±5°
X.X :±0.25 X.X° :±1°
X.XX:±0.20 X.XX° :±0.5°

DRAWN NAME:	HX JN2.54-2x11P ZZ H8.9				
SIZE	A4	SCALE	N:1	PROUCT NO.	
REV	A	UNIT	mm	PROJECT	PAGE 1/1
DRAWN: 黄彬 2020.6.24	CHECKED: 张伟 2020.6.24		APPROVED: 罗小春 2020.6.24		