

FEATURES


Maximum Output current I_O : 0.1 A

Output voltage V_O : 5 V

Continuous total dissipation P_D : 0.35 W ($T_a = 25^\circ\text{C}$)

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies)

Parameter	Symbol	Value	Unit
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	0-125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65-150	$^\circ\text{C}$

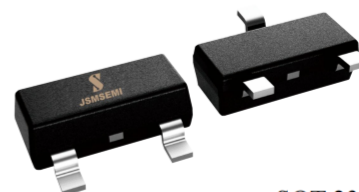


SOT-23

1. OUT
2. IN
3. GND

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_I=10\text{V}, I_O=40\text{mA}, C_i=0.33\mu\text{F}, C_o=0.1\mu\text{F}$, unless otherwise specified)


Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Output voltage	V_O		25°C	4.8	5.0	5.2	V
		$7\text{V} \leq V_I \leq 20\text{V}, I_O=1\text{mA} \sim 40\text{mA}$	$0-125^\circ\text{C}$	4.75	5.0	5.25	V
		$I_O=1\text{mA} \sim 70\text{mA}$		4.75	5.0	5.25	V
Load Regulation	ΔV_O	$I_O=1\text{mA} \sim 100\text{mA}$	25°C		15	60	mV
		$I_O=1\text{mA} \sim 40\text{mA}$	25°C		8	30	mV
Line regulation	ΔV_O	$7\text{V} \leq V_I \leq 20\text{V}$			32	150	mV
		$8\text{V} \leq V_I \leq 20\text{V}$	25°C		26	100	mV
Quiescent Current	I_q		25°C		3.8	6	mA
Quiescent Current Change	ΔI_q	$8\text{V} \leq V_I \leq 20\text{V}$	$0-125^\circ\text{C}$			1.5	mA
	ΔI_q	$1\text{mA} \leq V_I \leq 40\text{mA}$	$0-125^\circ\text{C}$			0.1	mA
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{KHz}$	25°C		42		uV
Ripple Rejection	RR	$8\text{V} \leq V_I \leq 20\text{V}, f=120\text{Hz}$	$0-125^\circ\text{C}$	41	49		dB
Dropout Voltage	V_d		25°C		1.7		V

Typical Performance Characteristics

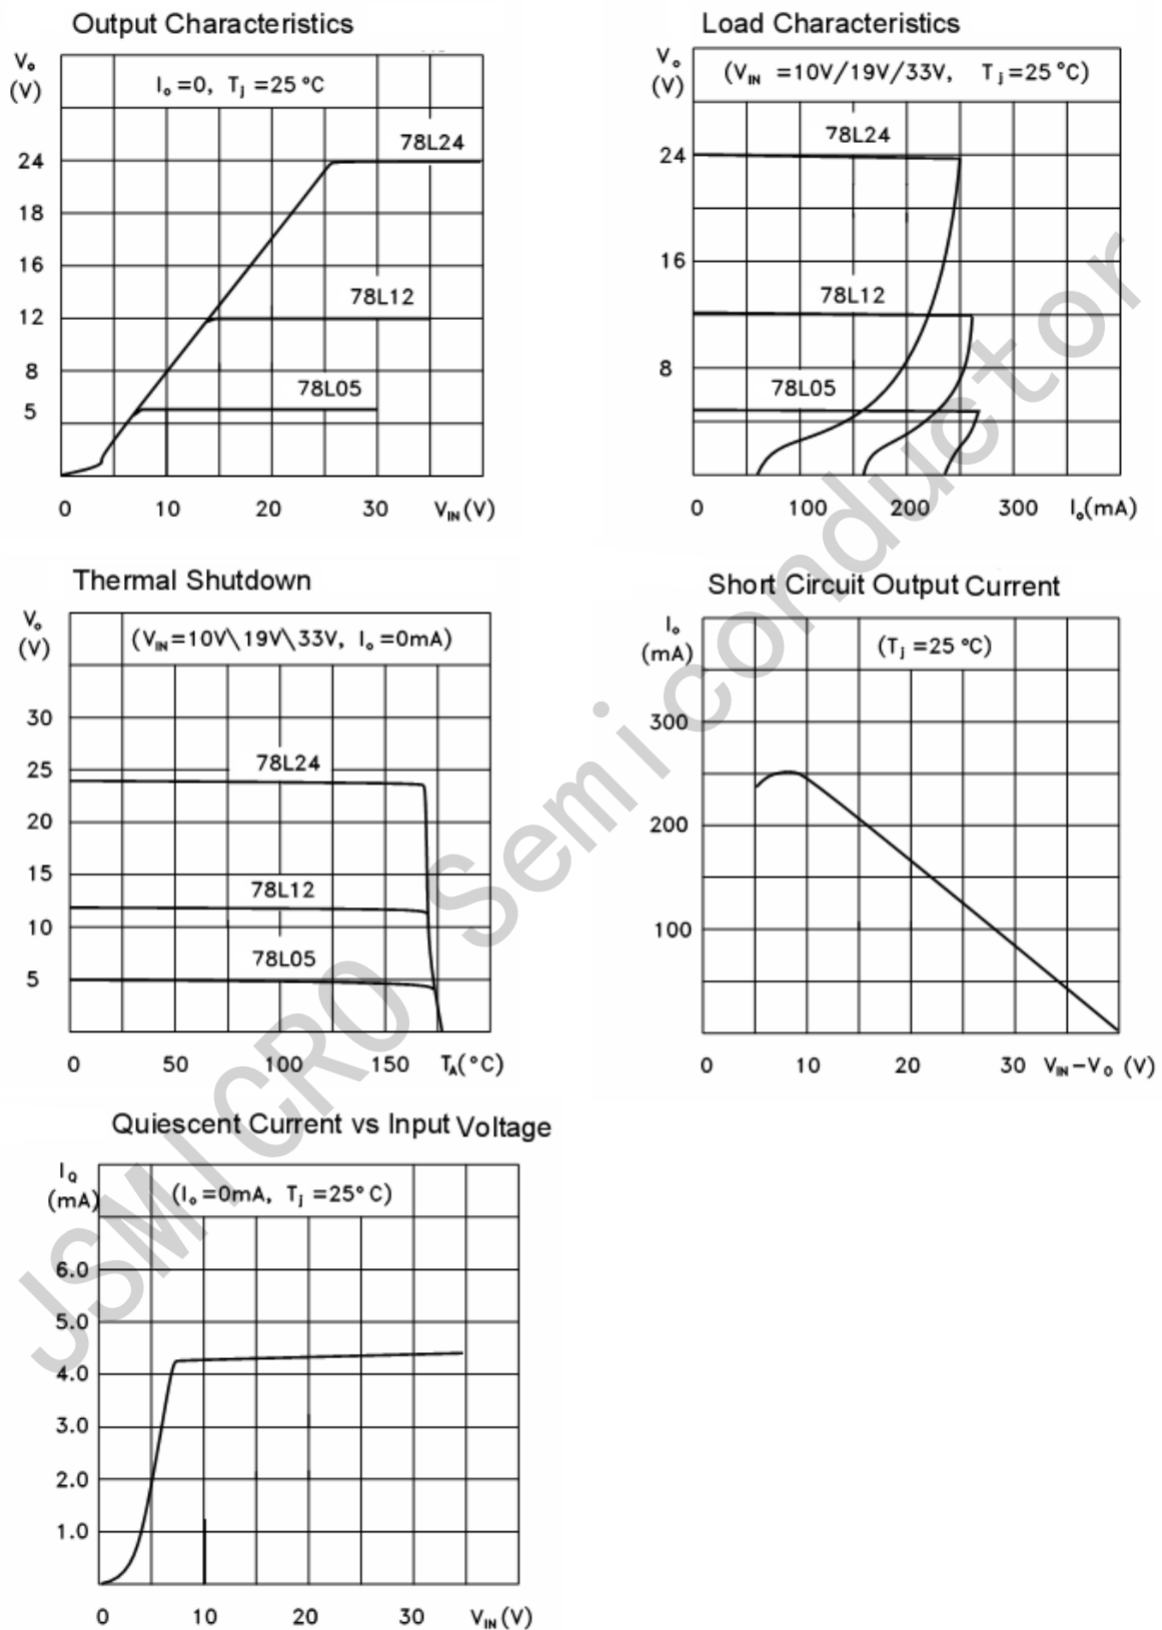

Package Information

SOT-23

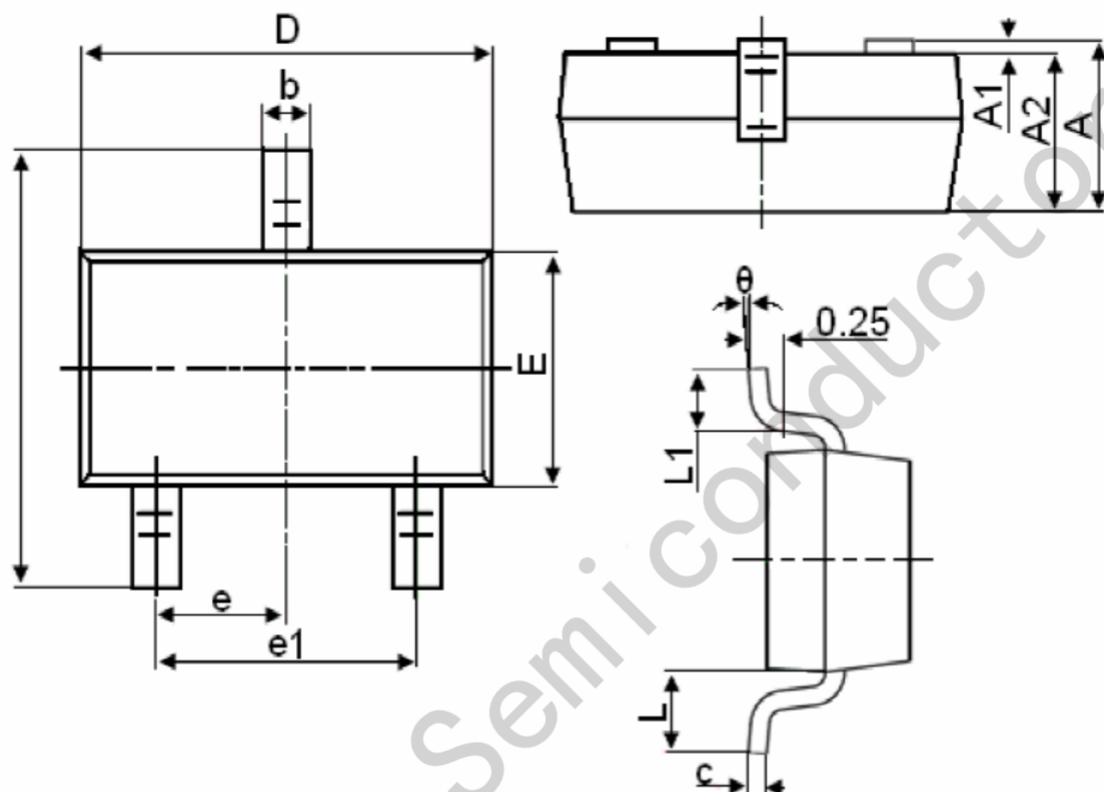

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°