

SPECIFICATIONS**USB Connector****Mechanical**

Mating Force: 3.50Kg (7.71Lb) max.
Unmating Force: 1.00Kg (2.20Lb) min.
Durability: 1500 Cycles


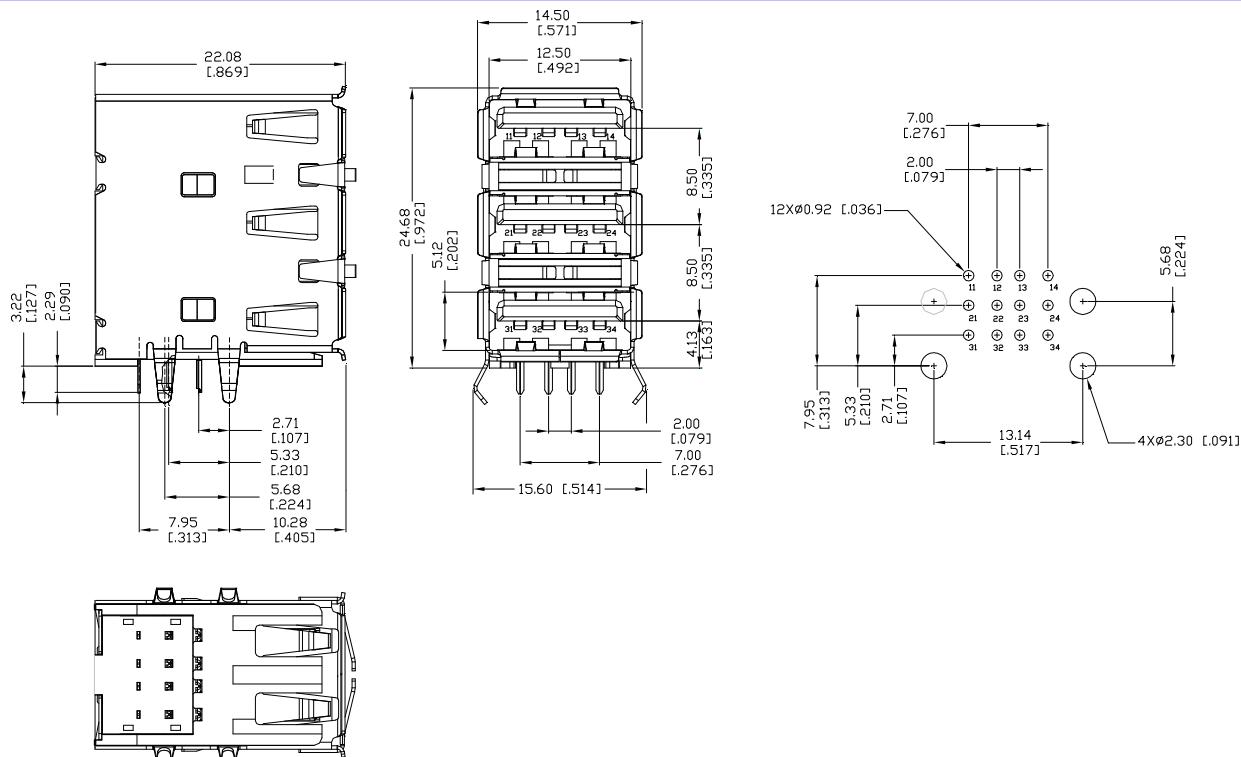
Electrical

Current Rating: 1.5A
Contact Resistance: 30mΩ max.
Dielectric Withstanding Voltage: 500V AC/1min min.
Insulation Resistance: 1000MΩ min.

Physical

Housing: Thermoplastic, UL 94V-0 rated
Contact: Copper alloy
Shell: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -55°C to +85°C

UB Series
Right Angle, T/H
12 Pos.

**DRAWING****ORDERING INFORMATION**

PRODUCT NO: UB 1 1 1 2 C - M5D1 - 4 F

USB Series _____
 Terminator Type _____
 1=Right Angle Type
 Contact Design Type _____
 1=Female
 NO. of Pos _____
 1=4 Pos

Lead Free
 Package Code
 4=Tray Packing
 Extension Code
 Contact Area Plating
 C=30u" Pd/Ni+Gold Flash
 Profile Height
 2=4.13 mm