

G
F
E
D
C
B
A

1. Rated voltage : 250V(Max)
2. Current Rating: 3.0 AMP (Max.)
3. Contact Resistance: 30mΩ (Max.)
4. Withstanding voltage : 1000V AC/Minute
5. Insulation Resistance: 1000MΩ (Min)
6. Operation Temperature: -40℃ to +105℃

1.Housing : PBT (UL94V-0)
2.Contact : Copper Alloy, Au/Sn over Ni Plating
3.Shell : Steel, Ni Plated
4.Screw : SWRCH, Ni Plated
5.Harpoon : SPCC, Tin Plated

6235-03 M 44 XX R X A XX

Connector Type
F=Female
M=Male

No. of Pins
15, 26,
44P




Contact
S0: Gold
C0: Gold
G2: 2u" Gold
G3: 3u" Gold
G4: 5u" Gold

Plating
Flash/ Tin
Flash

Color
B=Black
W=White
U=Blue

Packing
A=Tray

Serial code

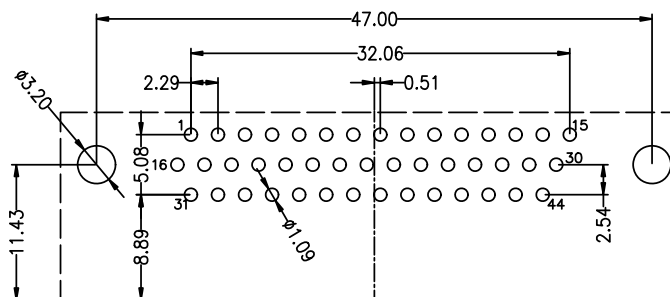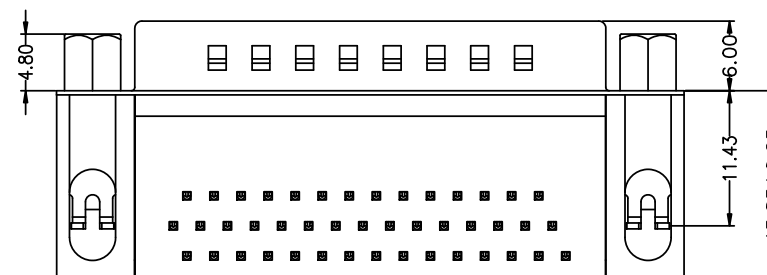

DRAW		OPERATION		SCALE	FIT	 JILN® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
		X.X	±0.30	UNIT	mm		
CHECK		X.XX	±0.20	SIZE	A4	PART NO.	6235-03M44XXRXAXX
		X.XXX	±0.10	SHEET	1/1		
APPROVE		Angle	±3°	PROJ.		TITLE:	HDR-44P公/铆锁带螺丝

JILN® 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD

PART NO.	6235-03M44XXRXAXX
----------	-------------------

TITLE: HDR-44P公/铆锁带螺丝