

PP Metal LC duplex SM GOF

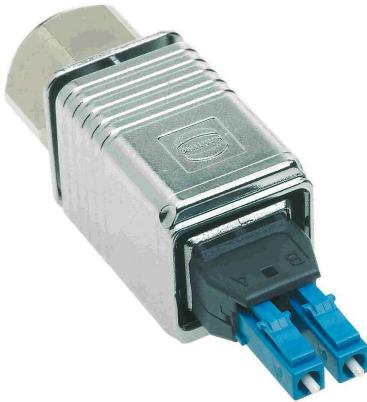


Image is for illustration purposes only. Please refer to product description.

Identification

Category	Connectors
Series	HARTING PushPull (V4)
Identification	LC duplex
Element	Connector sets
Description of the contact	Singlemode

Version

Number of contacts	2
Locking type	PushPull

Technical characteristics

Limiting temperature	-40 ... +70 °C
Mating cycles	≥200
Degree of protection acc. to IEC 60529	IP65 IP67
Cable diameter	5.8 ... 7.2 mm

Material properties

Material (hood/housing)	Metal
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e

Material properties

REACH Annex XVII substances Not contained

REACH ANNEX XIV substances Not contained

REACH SVHC substances Not contained

California Proposition 65 substances Not contained

Specifications and approvals

Specifications IEC 61076-3-106 Variant 4 (V4)

Approvals DNV GL

Commercial data

Packaging size 10

Net weight 90.66 g

Country of origin Romania

European customs tariff number 85366990

GTIN 5713140570634

ETIM EC002636

eCl@ss 27440114 Rectangular connector (for field assembly)